


## Small & Medium Size Cylinder Trucks

These trucks are ideal for use in repair shops, garages or where welding requirements may apply. Features include a reinforced frame, welding rod holders, zinc plated safety chain.


### Small Size Cylinder Trucks

These very popular models are designed to handle a 50 to 80 cubic ft. oxygen and 40 cubic ft. acetylene. Maximum 8" diameter. Large 7" solid rubber wheels.

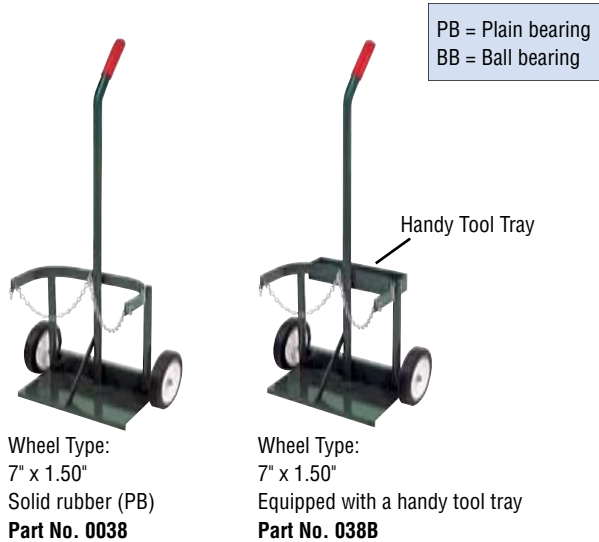

### Medium Size Cylinder Trucks

These very popular models are designed to handle an 80 to 150 cubic ft. oxygen and small or medium acetylene or (1 cylinder up to 8-1/2" in diameter) and (1 cylinder up to 8" in diameter).

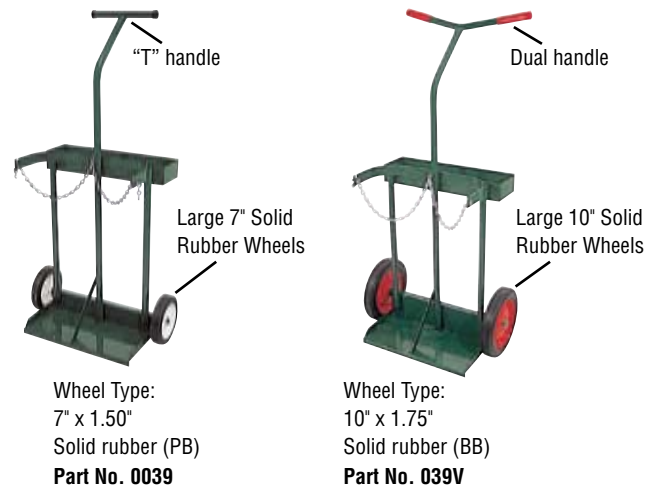


### Medium Size Cylinder Trucks (Combined Cylinder Diameter - 16-1/2")

Anthony's "User Friendly" ergonomic patented handle design helps provide a more comfortable positioning of the hands for better control and maneuverability of the cart.



#### High Rail Frame Design

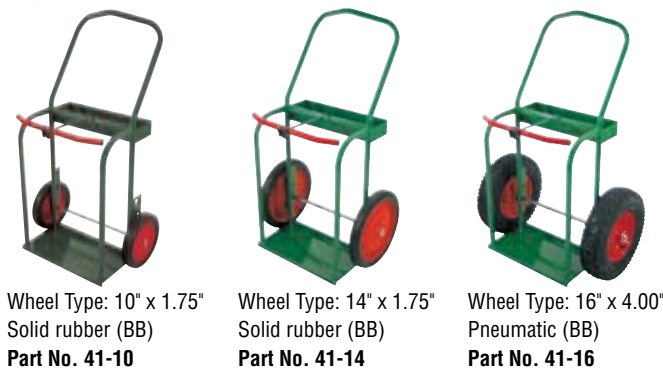

#### Low Rail Frame Design



Part No.	Wheel Dia. & Type	Max. Diameter Oxygen Cylinder	Max. Dia. Acetylene Cyl.	Combined Cylinder Dia.	Height	Width	Weight	Base Plate (I.D.) W x Depth
0038	7" x 1.50" S/R	7"	8"	15"	41"	19"	17 lbs.	15" x 7"
038B	7" x 1.50" S/R	7"	8"	15"	41"	19"	19 lbs.	15" x 7"
0039	7" x 1.50" S/R	8"	8-1/2"	16-1/2"	44"	21"	22 lbs.	16-3/4" x 8"
039V	10" x 1.75" S/R	8"	8-1/2"	16-1/2"	44"	21"	28 lbs.	19" x 9"
41-10	10" x 1.75" S/R	8-1/4"	8-1/4"	16-1/2"	42"	22"	34 lbs.	16-3/4" x 8"
41-14	14" x 1.75" S/R	8-1/4"	8-1/4"	16-1/2"	42"	22"	44 lbs.	16-3/4" x 8"
41-16	16" x 4.00" Pneumatic	8-1/4"	8-1/4"	16-1/2"	42"	27"	49 lbs.	16-3/4" x 8"
41-14S	14" x 2.00" Steel	8-1/4"	8-1/4"	16-1/2"	42"	26"	35 lbs.	16-3/4" x 8"
4-10	10" x 1.75" S/R	8-1/4"	8-1/4"	16-1/2"	42"	26"	34 lbs.	18-1/2" x 8-1/2"
4-14	14" x 1.75" S/R	8-1/4"	8-1/4"	16-1/2"	42"	26"	44 lbs.	18-1/2" x 8-1/2"
4-14S	14" x 2.00" Steel	8-1/4"	8-1/4"	16-1/2"	42"	28"	35 lbs.	18-1/2" x 8-1/2"
4-16	16" x 4.00" Pneumatic	8-1/4"	8-1/4"	16-1/2"	42"	31"	49 lbs.	18-1/2" x 8-1/2"

## Large Liquid Cylinder Trucks

This new (patented) modern design provides for safe & easy handling of large liquid cylinders. These trucks have a fast adjusting lifting hook designed to fit a large variety of liquid cylinders on the market today. Features include a 3 point tilt design, heavy-duty reinforced lightweight tubing frame, top ring safety chain, fast adjusting nylon belly-band & large 6" heavy duty rear locking casters that can be easily removed & replaced for repair & maintenance.

**Handles the most popular and tallest cylinders on the market today.**

Lifting hook range: 56-1/4" to 61-3/4" (measure from the ground to the top of the cylinder eyelet hole)



Fast action self-setting "belly-band" with thumb release for added safety when transporting a cylinder long distances over rough or uneven surfaces.



Fast action adjustable vertical lifting hook (patented) handles a large variety of liquid cylinders



Operation instruction labels, in picture form, showing how to use the truck.

Heavy-duty double reinforced tubing frame design.

Large 6" heavy-duty locking swivel casters that can easily be removed for repair or replacement.

Height: 46"  
Width: 28" (O.D.)  
Weight: 92 lbs.  
**Part No. 87U-4**

Wheel type:  
16" X 4.00" pneumatic (BB)  
6" X 2" swivel casters w/locks

### Additional wheel types to choose from (not shown):

Height: 46"  
Width: 26" (O.D.)  
Weight: 85 lbs.  
Wheel Type: 10" X 2.75" solid rubber (BB); 6" X 2" swivel casters w/locks  
**Part No. 86U-4**

Height: 46"  
Width: 28" (O.D.)  
Weight: 124 lbs.  
Wheel Type: 16" X 4.00" solid rubber (BB); 6" X 2" swivel casters w/locks  
**Part No. 87U-4S**

## Industrial Wheels And Casters

Part No.	Wheel Dia.	Width	Bore	Type	Description	Load Rating	Corresponding Model No.
OW-1	6"	1.50"	1/2"	PB	Semi-pneumatic	30 lbs.	6105
OW-3	7"	1.50"	1/2"	PB	Solid rubber	150 lbs.	0038, 038B, 0039
OW-5	8"	1.50"	1/2"	PB	Solid rubber	125 lbs.	6108, 6108-C
W-11	10"	1.75"	5/8"	BB	Solid rubber	200 lbs.	0043, 039V, 41-10, 4-10, 85-10, 8-10, 6114, 6114R, 6110, 6214, 6210, 6041, 6061, 6121, 6124
W-12PN	10"	4.00"	3/4"	BB	Pneumatic	250 lbs.	88PN, 88PN-R, 86U-4PN, 55PN, 55PN-3B, 55PN-3B-FRA, 55PN-3B-SA, 54PN, 54PN-SC, 54PN-FRA, 54PN-SA
W-13	10"	2.75"	3/4"	BB	Solid rubber	300 lbs.	81, 88, 88-R, 86U-4, 55, 55-3B, 55-3B-FRA, 55-3B-SA, 54, 54-FRA, 54-14, 2-14
W-15	14"	2.00"	3/4"	BB	Solid rubber	275 lbs.	41-14, 4-14, 85-14, 8-14, 24-14, 2-14, 54-14, 94-14
W-17PN	16"	4.00"	3/4"	BB	Pneumatic	400 lbs.	41-16, 4-16, 85-16, 8-16, 24-16, 2-16, 94LFW-16, 94L-16, 94-16, 87U-4
W-17SP	16"	4.00"	3/4"	BB	Solid rubber	350 lbs.	85-16S, 8-16S, 24-16S, 2-16S, 94LFW-16S, 94L-16S, 94-16S, 87U-4S
W-18	18"	2.00"	3/4"	BB	Steel	275 lbs.	41-18, 4-18, 85-18, 8-18, 24-18, 2-18, 94LFW-18 94L-18
W-19	24"	2.00"	3/4"	BB	Steel	275 lbs.	85-24, 8-24, 24-24, 2-24, 94LFW-24, 94L-24 94-24, 84-24
W-22	4"	1.50"	3/8"	PB	Rubber swivel/brake	200 lbs.	88-R, 88PN-R, 54-SA, 54PN-SA, 6184, 6244, 55PN-3B-SA, 55-3B-SA
W-22PS	4"	1.25"	3/8"	PB	Rubber swivel w/stem	140 lbs.	6114, 6114R, 6214, 55PN-3B-FRA, 55-3B-FRA, 54-FRA, 54PN-FRA
W-23R	6"	2.00"	1/2"	RB	Rubber rigid	600 lbs.	6246, 6406
W-24R	6"	2.00"	1/2"	RB	Rubber swivel/brake	600 lbs.	87U-4, 87U-4S, 86U-4, 86U-4PN, 6246, 6406
W-26	2"	1"	1/2"	PB	Sintered Iron	150 lbs.	87U-4, 87U-4S, 86U-4, 86U-4PN

## Large Oxygen & #5 or WK Acetylene Cylinder Trucks

### High Rail Design

These models are designed for (1) large oxygen and (1) #5 or WK acetylene cylinder side-by-side. Features include our new "User Friendly" heavy gauge wrap around handle, high side rail design providing more positive cylinder containment, large tool tray and our exclusive fast action cylinder placement band with large tightening knob.



BB = Ball bearing



Wheel Type:  
14" X 1.75"  
Solid rubber (BB)  
**Part No. 24-14**



Wheel Type:  
24" X 2.00"  
Steel (BB)  
**Part No. 24-24**



Wheel Type:  
16" X 4.00"  
Pneumatic (BB)  
**Part No. 24-16**

### Low Rail Design

For the user who prefers the look and construction of a low rail cylinder truck, these models are designed for (1) large oxygen and (1) #5, WK, or 100 lbs. propane cylinder side-by-side. Features include our new "User Friendly" heavy gauge wrap around handle, large tool tray and zinc plated safety chain.



Wheel Type:  
14" X 1.75"  
Solid rubber (BB)  
**Part No. 2-14**



Wheel Type:  
16" X 4.00"  
Pneumatic (BB)  
**Part No. 2-16**



Wheel Type:  
24" X 2.00"  
Steel (BB)  
**Part No. 2-24**

### Solid bar threaded axles and lock nuts are standard on all models

Part No.	Wheel Diameter & Type	Maximum Diameter Oxygen Cylinder	Maximum Diameter Acetylene Cylinder	Combined Cylinder Diameter	Height	Width (O.D.)	Weight	Base Plate (I.D.) W x Depth
24-14	14" x 1.75" Solid rubber	9-1/2"	13-1/2"	23"	47"	29"	53 lbs.	23" x 12"
2-14	14" x 1.75" Solid rubber	9-1/2"	15"	24-1/2"	47"	31"	53 lbs.	24.5" x 12"
24-16	16" x 4.00" Pneumatic	9-1/2"	13-1/2"	23"	47"	33"	57 lbs.	23" x 12"
2-16	16" x 4.00" Pneumatic	9-1/2"	15"	24-1/2"	47"	36"	56 lbs.	24.5" x 12"
24-24	24" x 2.00" Steel	9-1/2"	13-1/2"	23"	47"	32"	64 lbs.	23" x 12"
2-24	24" x 2.00" Steel	9-1/2"	15"	24-1/2"	47"	34"	63 lbs.	24.5" x 12"

## Large Oxygen & Medium Acetylene Cylinder Trucks

### High Rail Design

These models are designed for (2) high or low pressure cylinders side-by-side. Features include our new "User Friendly" heavy gauge wrap around handle, high side rail design providing more positive cylinder containment, large tool tray and our exclusive fast action cylinder placement band with large tightening knob.



BB = Ball bearing



Wheel Type: 10" x 1.75"  
Solid rubber (BB)  
**Part No. 85-10**



Wheel Type: 14" x 1.75"  
Solid rubber (BB)  
**Part No. 85-14**



Wheel Type: 16" x 4.00"  
Pneumatic (BB)  
**Part No. 85-16**



Wheel Type: 24" x 2.00"  
Steel (BB)  
**Part No. 85-24**

### Low Rail Design

For the user who prefers the look and construction of a low rail cylinder truck, these models are designed for (2) high or low pressure cylinders side-by-side. Features include our new "User Friendly" heavy gauge wrap around handle, large tool tray and zinc plated safety chain.



Wheel Type: 10" x 1.75"  
Solid rubber (BB)  
**Part No. 8-10**



Wheel Type: 14" x 1.75"  
Solid rubber (BB)  
**Part No. 8-14**



Wheel Type: 16" x 4.00"  
Pneumatic (BB)  
**Part No. 8-16**



Wheel Type: 24" x 2.00"  
Steel (BB)  
**Part No. 8-24**



Wheel Type: 10" x 2.75"  
Solid rubber  
**Part No. 0081**

### Solid bar threaded axles and locknuts are standard on all models.

Part No.	Wheel Diameter & Type	Maximum Diameter Oxygen Cylinder	Maximum Diameter Acetylene Cylinder	Combined Cylinder Diameter	Height	Width (O.D.)	Weight	Base Plate (I.D.) W x Depth
85-10	10" x 1.75" Solid rubber	9 -1/4"	9 -1/4"	18-1/2"	46"	25"	38 lbs.	19" x 9"
8-10	10" x 1.75" Solid rubber	9 -1/4"	9 -1/4"	18-1/2"	46"	26"	38 lbs.	20.5" x 9"
0081	10" x 2.75" Solid rubber	9 -1/4"	9 -1/4"	18-1/2"	46"	28"	52 lbs.	19" x 9.5"
85-14	14" x 1.75" Solid rubber	9 -1/4"	9 -1/4"	18-1/2"	46"	25"	45 lbs.	19" x 9"
8-14	14" x 1.75" Solid rubber	9 -1/4"	9 -1/4"	18-1/2"	46"	27"	48 lbs.	20.5" x 9"
85-16	16" x 4.00" Pneumatic	9 -1/4"	9 -1/4"	18-1/2"	46"	29"	49 lbs.	19" x 9"
8-16	16" x 4.00" Pneumatic	9 -1/4"	9 -1/4"	18-1/2"	46"	32"	51 lbs.	20.5" x 9"
85-18	18" x 2.00" Steel	9 -1/4"	9 -1/4"	18-1/2"	46"	27"	54 lbs.	19" x 9"
8-18	18" x 2.00" Steel	9 -1/4"	9 -1/4"	18-1/2"	46"	27"	55 lbs.	20.5" x 9"
85-24	24" x 2.00" Steel	9 -1/4"	9 -1/4"	18-1/2"	46"	27"	56 lbs.	19" x 9"
8-24	24" x 2.00" Steel	9 -1/4"	9 -1/4"	18-1/2"	46"	27"	57 lbs.	20.5" x 9"

## Heavy-Duty Single Cylinder Delivery Trucks

Designed to handle various size cylinders, these trucks will handle oxygen, acetylene, helium, propane, nitrogen, CO<sub>2</sub> etc. or any cylinder up to 12" in diameter. Features include a specially designed reinforced steel bottom plate that allows you to load and transport supplies or move objects safely with ease.

BB = Ball bearing



Height: 48"  
Width: 18" (O.D.)  
Weight: 38 lbs.  
Wheel Type:  
10" x 2.75"  
Solid rubber (BB)  
**Part No. 0054**



Height: 48"  
Width: 22" (O.D.)  
Weight: 37 lbs.  
Wheel Type:  
10" x 4.00"  
Pneumatic (BB)  
**Part No. 54PN**



Height: 48"  
Width: 17" (O.D.)  
Weight: 43 lbs.  
Wheel Type:  
14" x 1.75"  
Solid rubber (BB)  
**Part No. 54-14**

### Stair Climber Models

Stair climber model trucks come equipped with stair climbers to assist when handling cylinders or other objects up and down stairs or over uneven surfaces. These models are designed to handle up to a 12" diameter cylinder.



Height: 48"  
Width: 22" (O.D.)  
Weight: 39 lbs.  
Wheel Type:  
10" x 4.00"  
Pneumatic (BB)  
**Part No. 54PNSC**



Height: 48"  
Width: 18" (O.D.)  
Weight: 40 lbs.  
Wheel Type:  
10" x 2.75"  
Solid rubber (BB)  
**Part No. 54SC**

Designed and balanced for those who transport high pressure cylinders on a daily basis, these trucks are equipped with rear assemblies that relieve the operator from a heavy load. Four popular models are available to accommodate your delivery needs. Choice of solid or pneumatic tires.

**These models have a patented foldable rear assembly that can be quickly unlocked and closed for compact storage with large 4" casters, removable for repair or replacement.**



Height: 48"  
Width: 18" (O.D.)  
Weight: 46 lbs.  
Wheel Type:  
10" x 2.75"  
Solid rubber (BB)  
**Part No. 54FRA**



Height: 48"  
Width: 22" (O.D.)  
Weight: 45 lbs.  
Wheel Type:  
10" x 4.00"  
Pneumatic (BB)  
**Part No. 54PNFRA**

### Stationary Back Assembly with Large 4" Rear Casters

These models are designed to handle up to a 12" diameter cylinder.



Height: 48"  
Width: 18" (O.D.)  
Weight: 42 lbs.  
Wheel Type:  
10" x 2.75"  
Solid rubber (BB)  
**Part No. 54SA**



Height: 48"  
Width: 22" (O.D.)  
Weight: 41 lbs.  
Wheel Type:  
10" x 4.00"  
Pneumatic (BB)  
**Part No. 54NSA**

**Note:** Not recommended for use with 6000 PSI cylinders.



## Heavy-Duty Cylinder Delivery Trucks

### Models with Load Rate of 500 Lbs.

Designed for those who need to do more than just handle cylinders on a daily basis, these trucks feature a specially constructed toeplate that allows you to load and transport supplies or move objects safely with ease. Choice of solid or pneumatic wheel models available.

BB = Ball bearing



Height: 48"  
Width: 29" (O.D.)  
Weight: 55 lbs.  
Wheel Type:  
10" x 2.75"  
Solid rubber (BB)  
**Part No. 0055**



Height: 48"  
Width: 33" (O.D.)  
Weight: 54 lbs.  
Wheel Type:  
10" x 4.00"  
Pneumatic (BB)  
**Part No. 55PN**

**Dual Grip Handle** - These models are designed to hold (2) cylinders up to 9-1/2" in diameter each. The most popular style delivery trucks on the market, these sleek units are designed with a dual grip handle so the operator can maneuver (2) large high pressure cylinders with ease. Choice of solid or pneumatic wheel models available.



Height: 48"  
Width: 21" (O.D.)  
Weight: 38 lbs.  
Wheel Type:  
10" x 2.75"  
Solid rubber (BB)  
**Part No. 55-3B**



Height: 48"  
Width: 25" (O.D.)  
Weight: 37 lbs.  
Wheel Type:  
10" x 4.00"  
Pneumatic (BB)  
**Part No. 55PN3B**

Designed and balanced for those who transport (2) 244 to 330 cu. ft. high pressure cylinders on a daily basis, the trucks below are equipped with rear assemblies that relieve the operator from the heavy load. Four popular models are available to accommodate your delivery needs. Choice of solid or pneumatic tires.

**These models have a patented foldable rear assembly that can be quickly unlocked and closed for compact storage with large 4" casters, removable for repair or replacement.**

### Stationary Back

Stationary back assembly with large 4" rear casters.



Height: 48"  
Width: 21" (O.D.)  
Weight: 50 lbs.  
Wheel Type:  
10" x 2.75"  
Solid rubber (BB)  
**Part No. 55-3B-FRA**



Height: 48"  
Width: 25" (O.D.)  
Weight: 49 lbs.  
Wheel Type:  
10" x 4.00"  
Pneumatic (BB)  
**Part No. 55PN3BFRA**



Height: 48"  
Width: 21" (O.D.)  
Weight: 55 lbs.  
Wheel Type:  
10" x 2.75"  
Solid rubber (BB)  
**Part No. 55-3B-SA**



Height: 46"  
Width: 25" (O.D.)  
Weight: 54 lbs.  
Wheel Type:  
10" x 4.00"  
Pneumatic (BB)  
**Part No. 55PN3BSA**

**Note:** Not recommended for use with 6000 PSI cylinders.

### Built In Firewall & Lifting Eye Series

The Anthony® Firewall Series is designed to restrict a flame generated from (1) acetylene or other welding fuel-gas cylinder placed adjacent to (1) oxygen cylinder on the same truck. The center baffle prevents heating the adjacent oxygen cylinder contents to such an extent that it causes expansion of the oxygen cylinder contents, which increases the PSI level higher than the D.O.T. prescribed safe pressure level. Should the oxygen cylinder contents be expanded beyond the D.O.T. safe level, the expanded contents could activate the safety control burst disc, which would then allow oxygen to be added to the fuel-gas cylinder generated flame, causing a more intense or expanded flame.

- **8 to 1 lifting safety ratio.**

Certified engineering calculations are available upon request.

To see what the U.S. Department of Labor, Occupational Safety and Health Administration (OSHA) has to say about Anthony's firewall compliance, log on to [www.anthonycarts.com](http://www.anthonycarts.com).

BB = Ball Bearing  
RB = Tapered Roller Bearing

**Anthony's cylinder cart firewalls are rated at 1 hour, twice the Federal OSHA standards.**



Height: 60"  
Width: 37" (O.D.)  
Weight: 155 lbs.  
Wheel Type: 16" x 4.00"  
Pneumatic (BB)  
**Part No. 94LFW16**



Height: 60"  
Width: 37" (O.D.)  
Weight: 178 lbs.  
Wheel Type: 16" x 4.00"  
Solid rubber (BB)  
**Part No. 94LFW16S**



Height: 60"  
Width: 46" (O.D.)  
Weight: 208 lbs.  
Wheel Type: 24" x 6.00"  
Auto/Rim (RB)  
**Part No. 94-15LFW-24**

### Firewall Series

The purpose of the firewall partition is to restrict a flame generated by the welding fuel-gas cylinder from heating the adjacent oxygen cylinder and where a fire resistant wall is required for proper cylinder storage.

Features include a heavy-duty steel frame construction, Triple Battery Firewall Partition (patent pending), heavy gauge reinforcement toeplate, large slotted locking tool box (for locking away torches and regulators when not in use) and zinc plated safety chain.



Height: 62"  
Width: 37" (O.D.)  
Weight: 118 lbs.  
Wheel Type: 16" x 4.00"  
Pneumatic (BB)  
**Part No. 94FW16**



Height: 62"  
Width: 37" (O.D.)  
Weight: 140 lbs.  
Wheel Type: 16" x 4.00"  
Solid rubber (BB)  
**Part No. 94FW16S**

### Lifting Eye Series (No Firewall)

These models are engineered and designed for the transporting and lifting of cylinders. Features include a **5 to 1 lifting safety ratio**, heavy-duty steel frame construction, large slotted locking tool box, our exclusive fast action cylinder placement bands and a heavy gauge reinforced toeplate. Certified Engineering Calculations on these models are available upon request.



Height: 64"  
Width: 37" (O.D.)  
Weight: 106 lbs.  
Wheel Type: 16" x 4.00"  
Solid rubber (BB)  
5:1 Lifting safety ratio  
**Part No. 94L-16S**



Height: 64"  
Width: 37" (O.D.)  
Weight: 79 lbs.  
Wheel Type: 16" x 4.00"  
Pneumatic (BB)  
5:1 Lifting safety ratio  
**Part No. 94L-16**



Height: 64"  
Width: 46" (O.D.)  
Weight: 148 lbs.  
Wheel Type: 24" x 6.00"  
Auto/RIM (RB)  
5:1 Lifting safety ratio  
**Part No. 94-15L**



Height: 64"  
Width: 37" (O.D.)  
Weight: 90 lbs.  
Wheel Type: 24" x 2.00"  
Steel (BB)  
5:1 Lifting safety ratio  
**Part No. 94L-24**

## Single / Multiple C, D, & E Cylinder Carts, Racks and Stands

### Multiple C, D & E Size Cylinder Carts & Stands



Part No. 6246

Part No.	Wheel Diameter & Type	Cylinder Capacity	Height	Width	Depth	Weight
6040	Stand	4	19.5"	10.5"	12.5"	10 lbs.
6060	Stand	6	19.5"	15"	12"	14 lbs.
6120	Stand	12	19.5"	22"	15"	21 lbs.
6180	Stand	18	20"	32"	20"	30 lbs.
6240	Stand	24	20"	32"	30"	38 lbs.
6400	Stand	40	20"	25"	40"	67 lbs.
6041	Cart - 10" x 1.75" solid rubber	4	42"	18"	10"	26 lbs.
6061	Cart - 10" x 1.75" solid rubber	6	42"	18"	15"	30 lbs.
6121	Cart - 10" x 1.75" solid rubber	12	42"	22"	15"	39 lbs.
6124	Cart - wheels & casters	12	42"	22"	20"	44 lbs.
6184	Cart - caster dia: 4" w/locks	18	42"	16"	30"	43 lbs.
6244	Cart - caster dia: 4" w/locks	24	42"	20"	30"	50 lbs.
6246	Cart - caster dia: 6" w/locks	24	46"	21.5"	31.5"	64 lbs.
6406	Cart - caster dia: 6" w/locks	40	46"	25"	46.5"	106 lbs.

### Layered C, D & E Size Cylinder Carts & Racks



Part No. LC50-4

Part No.	Wheel Diameter & Type	Cylinder Capacity	Height	Width	Depth	Weight
LC50-4	Cart - caster dia: 5" w/ brake	50	73"	27"	32"	190 lbs.
LC50-4SD	Cart - caster dia: 5" w/removable steel doors designed for standard valve E type cylinders.	50	73"	27"	32"	190 lbs.
LC50-4SD-IVU	Cart - caster dia: 5" w/removable steel doors designed for use with integrated valve unit (IVU) E type cylinders. Max. cylinder length 35".	50	73"	27"	32"	190 lbs.
LR50	Rack	50	73"	27"	32"	174 lbs.
LR50-SD	Rack - w/removable steel doors designed for standard valve E type cylinders.	50	73"	27"	32"	174 lbs.
LR50-SD-IVU	Rack - w/removable steel doors designed for use with integrated valve unit (IVU) E type cylinders. Max. cylinder length 35".	50	73"	27"	32"	174 lbs.

### Heavy-Duty Multi-Cylinder Delivery Carts

These heavy-duty carts are designed to transport multiple types and sizes of cylinders. Its unique slanted floor plate, deeper design, angles the cylinders to the rear of the cart for safety. Features include a rectangular design for compact nesting in delivery trucks, dual handles for easy maneuvering in tight places, heavy-duty rugged 6" steel locking casters and ratchet straps standard on all models.



Height: 48", Width: 42", Depth: 32"  
Weight: 180 lbs.  
Wheel Type: 6" x 2" steel swivel/brakes  
or 6" x 2" steel rigid  
Part No. CB50-4



Height: 48", Width: 42", Depth: 32"  
Weight: 180 lbs.  
Wheel Type: 6" x 2" steel swivel/brakes  
or 6" x 2" steel rigid  
Part No. CB50-4-SD

### Single D & E Size Cylinder Cart & Mount

Wall mount with two ring frame



Height: 14"  
Depth: 5" (O.D.)  
Width: 5" (O.D.)  
Weight: 4 lbs.  
Part No. 610WM

Gurney/mask hook



Height: 41"  
Depth: 10" (O.D.)  
Width: 12" (O.D.)  
Weight: 7.5 lbs.  
Part No. 610S



## Cylinder Stands / Cylinder Wall Brackets

### Cylinder Wall Brackets and Cylinder Stands

#### Holds 7" to 9-1/2" Diameter Cylinders



Width: 11"  
Depth: 6"  
Weight: 3 lbs.  
Part No. **WB100**



Width: 22"  
Depth: 7"  
Weight: 5 lbs.  
Part No. **WB200**



Width: 11"  
Depth: 6"  
Weight: 3 lbs.  
Part No. **WB100C**



Width: 22"  
Depth: 7"  
Weight: 5 lbs.  
Part No. **WB200C**

#### Holds 10" to 15-1/2" Diameter Cylinders



Width: 16"  
Depth: 12"  
Weight: 4 lbs.  
Part No. **WB100-15**



Width: 31"  
Depth: 12"  
Weight: 6 lbs.  
Part No. **WB200-15**



Width: 16"  
Depth: 12"  
Weight: 4 lbs.  
Part No. **WB100-15C**



Width: 31"  
Depth: 12"  
Weight: 6 lbs.  
Part No. **WB200-15C**

### Large Single & Dual Cylinder Stands

#### Holds Two 9" To 9-1/2" Cylinders


Patented Stand



Height: 48"  
Depth: 10" (O.D.)  
Width: 24" (O.D.)  
Weight: 22 lbs.  
Cylinder Capacity: 2  
Part No. **CH-200-C**

#### Holds One 7" To 9-1/2" Cylinder

Patented Stand



Height: 13"  
Depth: 18" (O.D.)  
Width: 18" (O.D.)  
Weight: 14 lbs.  
Part No. **610FE**

### 40 To 150 Cubic Ft. Cylinder Trucks

#### Fits Cylinders Up to 8-1/4" in Diameter



Height: 40"  
Depth: 12" (O.D.)  
Width: 13" (O.D.)  
Weight: 14 lbs.  
Part No. **6108C**



Height: 40"  
Depth: 12" (O.D.)  
Width: 13" (O.D.)  
Weight: 12 lbs.  
Part No. **6108**

## Cylinder Carts

### Large 244 - 330 Cubic Ft. Medical Cylinder Trucks

Part numbers 6114 & 6214 are single & dual cylinder carts recommended for the transport & handling of large high pressure cylinders. They feature newly designed longer handles for ease of mobility, large 10" solid rubber front wheels and 4" rear casters for better maneuverability over rough or uneven surfaces. These units also come equipped with the newly designed and **patented** rear wheel retractable assembly. (Simply extend the rear mechanism into its locked position, tilt back and use). Part number 6114-R is equipped with a stationary rear assembly that is not retractable.



BB = Ball bearing



Retractable

38"

Height: 46"  
Depth: 15" (O.D.)  
Width: 15" (O.D.)  
Weight: 30 lbs.  
Wheel Dia: 10" X 1.75"  
Solid Rubber (BB)  
Caster: 4" X 1" swivel/post  
Cylinder Capacity: 1  
**Part No. 6114**



Not Retractable

38"

Height: 46"  
Depth: 28" (O.D.)  
Width: 15" (O.D.)  
Weight: 30 lbs.  
Wheel Dia: 10" X 1.75"  
Solid Rubber (BB)  
Caster: 4" X 1" swivel/post  
Cylinder Capacity: 1  
**Part No. 6114R**



Retractable

38"

Height: 46"  
Depth: 28" (O.D.)  
Width: 25" (O.D.)  
Weight: 41 lbs.  
Wheel Dia: 10" X 1.75"  
Solid Rubber (BB)  
Caster: 4" X 1" swivel/post  
Cylinder Capacity: 2  
**Part No. 6214**



46"

Height: 46"  
Depth: 28" (O.D.)  
Width: 25" (O.D.)  
Weight: 31 lbs.  
Wheel Dia: 10" X 1.75"  
Solid rubber (BB)  
Cylinder Capacity: 2  
**Part No. 6210**



46"

Height: 46"  
Depth: 15" (O.D.)  
Width: 15" (O.D.)  
Weight: 23 lbs.  
Wheel Dia: 10" X 1.75"  
Solid rubber (BB)  
Cylinder Capacity: 1  
**Part No. 6110**

### Large Single Cylinder Trucks (Maximum Cylinder Diameter - 16")

These heavy-duty single cylinder trucks are designed to carry (1) cylinder no greater than 16" in diameter. The combination of an all welded double reinforced steel frame combined with a heavy gauge baseplate and (2) sets of safety chains makes these trucks rugged & dependable in any application.

Stationary rear assembly with heavy-duty 4" casters w/ locks for taller cylinders



Height: 50"  
Width: 20" (O.D.)  
Weight: 34 lbs.  
Wheel Type: 10" X 2.75"  
Solid rubber (BB)  
**Part No. 0088**



Height: 50"  
Width: 24" (O.D.)  
Weight: 38 lbs.  
Wheel Type: 10" X 4.00"  
Pneumatic (BB)  
**Part No. 88PN**



Height: 50"  
Width: 20" (O.D.)  
Weight: 54 lbs.  
Wheel Type: 10" X 2.75"  
Solid rubber (BB)  
**Part No. 088R**



Height: 50"  
Width: 24" (O.D.)  
Weight: 58 lbs.  
Wheel Type: 10" X 4.00"  
Pneumatic (BB)  
**Part No. 088PNR**