


Mag Tool / Tank Wrenches

Mag Tool™: Multi-Purpose Magnetic Holders

- Designed to work as an extra hand- enables fast and accurate holding of any ferrous object.
- Will hold both sheet and tube at angles of 45°, 90° and 135°
- Compact design allows use in tight places.
- Can be used as double-sided holder for welding and assembly work.
- Ideal for use as work-holder and positioner in welding, soldering, marking-off, pipe installation, supporting, jigging, assembly, as a separator, multi-units for heavy weldments, lifting etc.
- 10 per carton.

⚠ Caution! Do not use with DC current when welding.

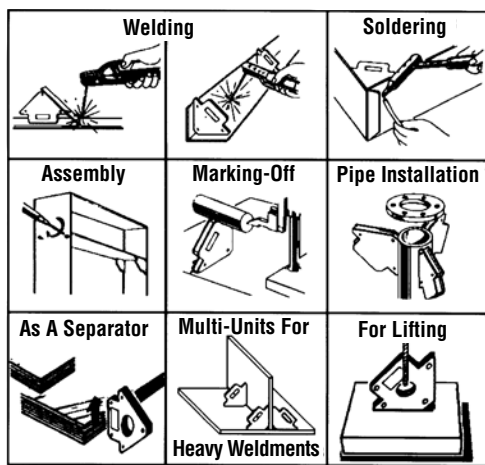

Part No. M-060



Part No. M-061



Part No. M-063



Part No. M-065



Part No.	Dimensions		Supports up to		Direct lifts (each angle)*		Net weight	
	Inches	cm	Lbs.	Kg	Lbs.	Kg	Oz.	Grams
M-060 (small)	3.6 x 2.4 x 0.44	9 x 6 x 1.1	28	12.5	11	5	6	170
M-061 (medium)	4.7 x 3.4 x 0.56	12 x 8.5 x 1.4	48.5	22	18.5	8.5	12	340
M-063 (large)	6.3 x 4 x 0.63	15.8 x 10 x 1.7	90	41	35	16	1.65	750
M-065 (x-large)	7-9 x 5 x 0.88	20 x 12.5 x 21	122	55	48.5	22	2.75	1.25

Magnet: anisotropic ferrite

* In contact with ferrous objects of adequate thickness and smooth surface finish.

Tank Wrenches

- Heavy-duty forged tank wrenches fit most valve stems and gas connections.
- Socket-holes are deep, smooth and precisely sized for solid connection.
- Larger handles for firm grip and better leverage.
- All wrenches are individually packaged.



Part No. 1013



Part No. 0250



Part No. 0010



Part No. 0005

Part No.	UPC No. 0 27719	Description	Hole Size		Ctn/Case
			Inches	mm	
1013	01320 6	Ten way tank wrench, 3/16" - 1-1/8" with 3/8" socket	3/8	9.52	10/50
0250	01321 3	"T" handle tank wrench, for Linde® acetylene valves	9/32	7.14	10/100
0020	01330 5	"T" handle tank wrench, for commercial acetylene valves	3/8	9.52	10/100
0010	01331 2	"L" handle tank wrench, for commercial acetylene valves	3/8	9.52	20/200
0005	01332 9	Box tank wrench, for "B" & "MC" acetylene valves	3/16	4.76	100/1000

Pressure Gauges

- Premium quality replacement gauges are the industry standard.
- Oxy-cleaned welding gauges (cleaned for oxygen per ANSI B40.1 STD.). Suitable for use on oxygen service, medical equipment and other fuel gases which are non-corrosive to brass or bronze and where stem-mounting is desired.
- Polished drawn brass or gold powder painted steel with one-piece, impact-resistant polycarbonate posilock lens.
- For use with compressed gas regulators, these gauges are an excellent choice for the original equipment and replacement applications. They will provide long-life and safe operation.
- Gauges are U.L. listed.

Specifications:

Case: Powder painted steel (gold) or polished drawn brass

Lens: One-piece, impact-resistant polycarbonate

Socket: Brass

Connection: 1/4" N.P.T. - 2" (50 mm) and 2-1/2" (60 mm) dial

Movement: Precision machined all copper alloy

Tube: Copper alloy bourdon tube

Pointer: Black-finished aluminum

Dial-face: Easy-to-read, corrosion-resistant aluminum dial

Accuracy: 3%-2%-3% per ANSI B40.1 grade B



Polished Drawn Brass BG Series



POP Part No.	Boxed Part No.	Size	PSI
BG-15100	BG-15100-B	1.5"	100
BG-15200	BG-15200-B	1.5"	200
BG-1530	BG-1530-B	1.5"	30
BG-15400	BG-15400-B	1.5"	400
BG-154000	BG-154000-B	1.5"	4000
BG-230	BG-230-B	2"	30
BG-2100	BG-2100-B	2"	100
BG-2200	BG-2200-B	2"	200
BG-2400	BG-2400-B	2"	400
BG-24000	BG-24000-B	2"	4000
BG-2530	BG-2530-B	2-1/2"	30
BG-25100	BG-25100-B	2-1/2"	100
BG-25200	BG-25200-B	2-1/2"	200
BG-25400	BG-25400-B	2-1/2"	400
BG-254000	BG-254000-B	2-1/2"	4000
BG-260	BG-260-B	2"	60
BG-2600	BG-2600-B	2"	600
BG-23000	BG-23000-B	2"	3000
BG-2560	BG-2560-B	2-1/2"	60
BG-25600	BG-25600-B	2-1/2"	600
BG-251000	BG-251000-B	2-1/2"	1000
BG-253000	BG-253000-B	2-1/2"	3000
Gauge Cover Lens			
GCL-25		2-1/2"	

Powder Painted Steel PG Series



POP Part No.	Boxed Part No.	Size	PSI
PG-15100	PG-15100-B	1.5"	100
PG-15200	PG-15200-B	1.5"	200
PG-1530	PG-1530-B	1.5"	30
PG-15400	PG-15400-B	1.5"	400
PG-154000	PG-154000-B	1.5"	4000
PG-230	PG-230-B	2"	30
PG-2100	PG-2100-B	2"	100
PG-2200	PG-2200-B	2"	200
PG-2400	PG-2400-B	2"	400
PG-24000	PG-24000-B	2"	4000
PG-2530	PG-2530-B	2-1/2"	30
PG-25100	PG-25100-B	2-1/2"	100
PG-25200	PG-25200-B	2-1/2"	200
PG-25400	PG-25400-B	2-1/2"	400
PG-254000	PG-254000-B	2-1/2"	4000
Gauge Cover Lens			
GCL-2		2"	

Rotary Burs / Steel Files and Brushes

Tungsten Carbide, Rotary Burs (Double Cut)

- Tungsten carbide rotary burs offer perfect solutions for the welding jobs: trimming welds, grinding smooth fillets & preparation for weld.
- Tungsten carbide burs give you longer life, due to the optimum coordination of number of flutes, spiral angle, rake angle and concentricity.
- Designed for high stock removal rates with proportionate long life.
- Superior performance for machining of materials with any tensile strength.
- The most common used burs in shapes and sizes are as follows, in double cut.
- All rotary burs have a standard shank of 1/4" (6 mm) and packaged 1 piece to a pack.
- 10 per carton.

Note: Use lower speeds when cutting harder ferrous materials and higher speeds for softer non-ferrous materials.



Part Nos: SC-5-DC SF-5-DC SA-5-DC SL-4-DC SD-5-DC

Steel Rotary Files and Rasps

- Rotary burs offer perfect solutions for the welding jobs: trimming welds, grinding smooth fillets and preparation for welding.
- Repairs can be easily done because of a variety of shapes and sizes available.
- 10 per carton



Part Nos: CSA-5 CSF-5 CSD-5 CSC-5 CSL-4
RM-6 RE-6 RC-6 RA-6

Part No.	UPC No. 0 27719	Description
Steel rotary files		
CSA-5	00143 2	1/2" X 7/8", cylindrical shape
CSF-5	00144 9	1/2" X 7/8", round tree shape
CSD-5	00145 6	1/2" X 1/2", ball nose shape
CSC-5	00147 0	1/2" X 7/8", cylindrical shape
CSL-4	00148 7	1/2" X 7/8", 14° angle shape
RFS-5	03285 6	Steel rotary file kit, 5 pc. set
Steel rotary rasps		
RA-6	00153 1	Cylindrical shape
RC-6	00157 9	Ball nose shape
RE-6	00158 6	Oval shape
RM-6	00162 3	Cone shape

Note: Use lower speeds when cutting harder ferrous materials and higher speeds for softer non-ferrous materials.

Steel Files and Brushes

Half-Round File, Bastard

- Manufactured from the finest quality materials for long life.
- Uniform in cut ensures quick stock removal.
- Extremely durable and scientifically balanced.
- Double cut on both sides for outstanding performance.



Part No. HRB12

Scratch Brush, Long and Shoe Handle

- Used for removing rust, scale, paint, solder etc.
- Additional uses include cleaning threads, files, metal parts and castings.
- Available in carbon or stainless steel.



Part No. 388-CS



Part No. SH-46-CS

Brass Brush, Toothbrush Style 3 x 7 Rows

- Light duty cleaning of hard-to-reach spots and for cleaning welds in confined areas.



Part No. T-37-B

Parts Cleaning Brush

- Resistant to most parts cleaning solutions.
- Great for hard-to-reach spots and for cleaning in confined areas comes with a metal ferrule for more support.



Part No. PC-1P

Part No.	UPC No. 0 27719	Description	Ctn
HRB12	01348 0	Half-round file, bastard, 12", bulk	5/50
HRB14	01349 7	Half-round file, bastard, 14", bulk	5/50

Part No.	UPC No. 0 27719	Description	Ctn
Long handle			
388-CS	03370 9	Scratch brush, bulk	12/120
388-SS	03371 6	Stainless steel brush, bulk	12/120
Shoe handle			
SH-46-CS	03372 3	Shoe handle brush, bulk	12/120
SH-46-SS	03373 0	Stainless steel brush, bulk	12/120

Part No.	UPC No. 0 27719	Description	Ctn
T-37-B	00160 9	Brass brush, 3 x 7 rows, bulk	50/600
T-37-SS	00393 1	Stainless steel brush, 3 x 7 rows, bulk	50/600

Part No.	UPC No. 0 27719	Description	Ctn
PC-1P	00159 3	Parts cleaning brush, bulk	50/300

Electrode Holders

- Ergonomically designed.
- Lever for good hand clearance and better hold.
- Lightweight and easy-to-use.
- Available in a complete range of styles, sizes & capacities (150- 500 amp.) for accommodating electrodes from 1/16" (1.5 mm) through 3/8" (10 mm) from economically priced to heavy-duty models.
- Made from high quality materials for both high conductivity and improved cable connections.
- Efficient grooved jaw design insures firm electrode grip.
- Fully insulated, high strength spring for excellent gripping power.
- Heavy-duty, shock-proof nylon handle.
- Supplied with an allen wrench and cable connection ferrule assuring efficient connection and minimizing cable strand breakage at the connection.

Hyclass™ High Tong Type

- 10 per carton.



Part No. PA-532



Part No. PA-732



Part No. PA-38-HD

Part No.	UPC No. 0 27719	Amperage Capacity	Electrode Capacity		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
PA-532	00746 5	200	Up to 5/32	4.0	2/0	70	8	215	15	415
PA-316	00751 9	250	Up to 3/16	4.8	2/0	70	9	235	16	450
PA-732	00756 4	300	Up to 7/32	5.6	2/0	70	10	250	19	530
PA-14	00761 8	350	Up to 1/4	6.4	4/0	105	11	275	22	630
PA-14-HD	01117 2	400	Up to 1/4	6.4	4/0	105	11	280	23	650
PA-38-HD	01122 6	500	Up to 3/8	10	4/0	105	12	310	30	850

Match your Pearson® electrode holder to the electrode size and amperage used for greatest efficiency.

Replacement Parts for Hyclass™ Tip Insulators

- Upper and lower tip insulators are sold as a set.

Model No.	Part No.	UPC No. 0 27719	Amperage Capacity					
			200	250	300	350	400	500
PA-532	TI-4	01062 5	•					
PA-316				•				
PA-732	TI-5	01067 0			•			
PA-14						•		
PA-14-HD								•
PA-38-HD	TI-6	01072 4						•

Myclass™ Maintenance Class

- 10 per carton.



Part No. AF-2



Part No. AF-3



Part No. AF-50

Part No.	UPC No. 0 27719	Amperage Capacity	Electrode Capacity		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
AF-1	00726 7	150	Up to 5/32	4.0	1/0	50	8	215	14	390
AF-2	00731 1	200	Up to 5/32	4.0	1/0	50	8	215	14	390
AF-25	01112 7	250	Up to 3/16	4.8	2/0	70	8	215	14	400
AF-3	00736 6	300	Up to 1/4	6.4	2/0	70	10	250	22	610
AF-50	00741 0	500	Up to 3/8	10	4/0	105	12	310	28	800

Match your Pearson® electrode holder to the electrode size and amperage used for greatest efficiency.

Replacement Parts for Myclass™ Tip Insulators

- Upper and lower tip insulators are sold as a set.

Model No.	Part No.	UPC No. 0 27719	Amperage Capacity				
			150	200	250	300	500
AF-1	TI-1	01047 2	•				
AF-2				•			
AF-25					•		
AF-3	TI-2	01052 6				•	
AF-50	TI-3	01057 1					•

Electrode Holders

Proclass™ Production Class

- 10 per carton.



Part No. JH-1



Part No. AW-C



Part No. A3-S

Part No.	UPC No. 0 27719	Amperage Capacity	Electrode Capacity		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
JH-1	01137 0	250	Up to 3/16	4.8	1/0	50	8	215	15	430
AW-C	01142 4	300	Up to 1/4	6.4	2/0	70	10	250	22	610
A3-S	01147 9	500	Up to 3/8	10	4/0	105	13	325	32	900

Match your Pearson® electrode holder to the electrode size and amperage used for greatest efficiency.

Replacement Parts for Proclass™ Tip Insulators

- Upper and lower tip insulators are sold as a set.

Model No.	Part No.	UPC No. 0 27719	Amperage Capacity		
			200	300	500
JH-1	TI-9	01237 7	•		
AW-C	TI-10	01242 1		•	
A3-S	TI-11	01247 6			•

Electrode Holders STUB™ - Twist type (Stub Nose)

- Lightweight and easy-to-use.
- Better maneuverability - great for tight places.
- Excellent for vertical welding (Optimal type).
- Made from high quality materials for both high conductivity and improved cable connections.
- Efficient grooved jaw design insures firm electrode grip.
- Angle-head allows excellent visibility of production work (stub type).
- Fully insulated, high strength spring for excellent gripping power.
- Heavy-duty, shock-proof nylon handle.
- Supplied with an allen wrench and cable ferrule assuring efficient connection and minimizing cable strand breakage at the connection.
- 10 per carton.



Part No. 40-B

Part No.	UPC No. 0 27719	Amperage Capacity	Electrode Capacity		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
40-B	00766 3	400	Up to 3/16	4.8	3/0	95	8-3/4	220	17	490

Match your Pearson® electrode holder to the electrode size and amperage used for greatest efficiency.

Replacement Part for STUB™ Head Assembly



Part No. 40-B-HA

Model No.	Part No.	UPC No. 0 27719	Amperage Capacity
40-B	40-B-HA	01127 1	400

Handyman™

- Lightweight and easy-to-use.
- Economically priced and available in two most popular models (200 & 300 amp.) for accommodating electrodes up to 3/16" (4.8 mm).
- Efficient grooved jaw design insures firm electrode grip.
- Fully insulated, high strength spring for excellent gripping power.
- Heavy-duty, shock-proof nylon handle.
- Supplied with an allen wrench and cable connection ferrule assuring efficient connection and minimizing cable strand breakage at the connection.
- 10 per carton.



Part No. HM-30

Part No.	UPC No. 0 27719	AMP Capacity	Electrode Capacity		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
HM-20	02823 1	200	Up to 5/32	4.0	#1	35	8	200	11	310
HM-30	02829 3	300	Up to 3/16	4.8	2/0	70	9-1/4	235	14	380

Match your Pearson® electrode holder to the electrode size and amperage used for greatest efficiency.

**Replacement Parts for Handyman™
Tip Insulators**

- Upper and lower tip insulators are sold as a set.

Model No.	Part No.	UPC No. 0 27719	Amperage Capacity			
			200	250	300	400
HM-20	TI-14	00273 6	•			
HM-30					•	

SupraGrip™

- Made from high quality materials for both high conductivity and improved cable connections.
- Heavy-duty models are available in wide range of sizes and capacities (200-600 amp.) for accommodating electrodes from 1/16" (1.5 mm) through 3/8" (10 mm).
- Better maneuverability- great for tight places.
- Excellent for vertical welding.
- Straight-head allows excellent visibility of production work.
- High strength, heavy-duty, fully-insulated shock proof handle.
- Supplied with an allen wrench and cable connection ferrule assuring efficient connection and minimizing cable strand breakage at the connection.
- Newly designed electrode holder.
- 10 per carton.



Part No. SG-40

Part No.	UPC No. 0 27719	AMP Capacity	Electrode Capacity		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
SG-20	00266 8	200	Up to 5/32	4.0	#1	35	8-3/4	220	12	330
SG-40	00268 2	400	Up to 5/16	8.0	3/0	95	10-1/4	260	19	530
SG-60	00271 2	600	Up to 3/8	10.0	4/0	105	10-3/4	275	23	630

Match your Pearson® electrode holder to the electrode size and amperage used for greatest efficiency.


**Replacement Parts for SupraGrip™
Head Assembly**

- Upper and lower tip insulators are sold as a set.

Model No.	Part No.	UPC No. 0 27719	Amperage Capacity				
			150	200	250	400	600
SG-20	SG-20-HA	00277 4		•			
SG-40	SG-40-HA	00278 1				•	
SG-60	SG-60-HA	00281 1					•

Tip Insulators

- Upper and lower tip insulators are sold as a set.



Model No.	Part No.	UPC No. 0 27719	AMP Capacity						
			150	200	250	300	350	400	500
TI-1	AF-1	01047 2	•						
	AF-2		•						
	AF-25			•					
TI-2	AF-3	01052 6				•			
TI-3	AF-50	01057 1						•	
TI-4	PA-532	01062 5		•					
	PA-316				•				
TI-5	PA-732	01067 0				•			
	PA-14						•		
	PA-14-HD							•	
TI-6	PA-38-HD	01072 4						•	
TI-7	UT-20	01227 8		•					
	UT-30					•			
TI-8	UT-40	01232 2						•	
TI-9	JH-1	01237 7			•				
TI-10	AW-C	01242 1				•			
TI-11	A3-S	01247 6						•	
TI-14	HM-20	00273 6		•					
	HM-30					•			

Ground Clamps

Ground Clamps

- Unique design helps eliminate arc blow and makes it easy to change ground location for the best results.
- Large contact area assures positive grounding.



Part No. EG-200



Part No. EG-300



Part No. EG-500

Steel Ground Clamps- EG Series

- Zinc plated.
- Large hex screw cable connection assures safe cable connection every time.
- Pure copper braided shunts on EG-500 - allows both jaws to carry welding current.
- 10 per carton.

Part No.	UPC No. 0 27719	AMP Capacity	Jaw Opening		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
EG-200	00776 2	200	Up to 1-1/2	40	6-4	10-16	7	175	8	210
EG-300	00781 6	300	Up to 2	50	2-1	25-35	8	200	14	390
EG-500	00786 1	500	Up to 2	50	1/0-4/0	50-105	10	245	17	490

Magnetic Ground Clamps- MGC Series

- Large contact area assures excellent electrical contact.
- Strong gripping power: Pull strength = 130 Gauss.
- Grounding concealed to prevent dislodgement.
- Insulated to prevent annealing.
- Easy installation or removal.
- Most popular magnetic ground clamps in the market.
- 10 per carton.



Part No. MGC-300



Part No. MGC-500

Part No.	UPC No. 0 27719	AMP Capacity	Cable Capacity		Weight	
			AWG	mm ²	oz.	grams
MGC-300	00821 9	300	1-1/0	35-50	21	600
MGC-500	00826 4	500	2/0-4/0	50-105	22	623

Ground Clamps

- Pearson® ground clamps come in a range of models - from lightweight to heavy duty, high capacity models.
- Supplied with an allen wrench and cable connection ferrule assuring efficient connection and minimizing cable strand breakage at the connection.



Part No. PGC-200



Part No. PGC-300



Part No. PGC-500

Part No.	UPC No. 0 27719	AMP Capacity	Jaw Opening		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
PGC Series										
PGC-200	00791 5	200	Up to 1	25	1-1/0	35-50	6	150	16	445
PGC-300	00796 0	300	Up to 1-1/2	40	1/0-3/0	50-95	8	200	25	715
PGC-500	00801 1	500	Up to 2	50	2/0-4/0	70-105	9	225	35	990

PGC, LGC and GC Series

- Contoured handle lever for easy jaw opening.
- Strong gripping power.
- Large contact area assures positive grounding.
- Fully insulated spring.
- Conductor body holds the cable securely.
- Large hex screw cable connection assures safe cable connection every time.
- 10 per carton.



Part No. LGC-200



Part No. LGC-300



Part No. LGC-500

Part No.	UPC No. 0 27719	AMP Capacity	Jaw Opening		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
LGC Series										
LGC-200	00806 6	200	Up to 1	25	1-1/0	35-50	5-1/4	130	12	340
LGC-300	00811 0	300	Up to 1-1/2	40	1/0-3/0	50-95	7-1/4	180	21	600
LGC-500	00816 5	500	Up to 1-1/2	40	2/0-4/0	70-105	8	200	23	652



Part No. GC-2



Part No. GC-3



Part No. GC-5

Part No.	UPC No. 0 27719	AMP Capacity	Jaw Opening		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	grams
GC Series										
GC-2	01172 1	200	Up to 1	25	4-1/0	16-50	7	175	17	490
GC-3	01177 6	300	Up to 1-1/2	40	1/0-2/0	50-70	8-1/2	210	22	630
GC-5	01182 0	500	Up to 1-1/2	40	2/0-4/0	70-105	9-1/2	235	28	800

Battery Clamps / Cable Connectors and Adapters

Battery Clamps

- Excellent electrical and physical properties.
- All steel jaws.
- Hammer-on copper connection.
- Heavy duty tension spring gives positive connection on front and side.
- Vinyl insulation that is highly resistant to oil, acid, abrasion, chemicals and ozone
- Color coded- red and black.



Part No. BC-600B



Part No. BC-600R

Part No.	UPC No. 0 27719	Description	AMP	Jaw Opening		Cable Capacity		Weight		Ctn
				Inches	mm	AWG	mm ²	oz.	grams	
BC-600	00150 0	Battery clamps, set	600	Up to 1-1/2	40	1-3/0	35-95	16	435	10
BC-600R	00152 4	Battery clamp, red	600	Up to 1-1/2	40	1-3/0	35-95	8	218	20
BC-600B	00154 8	Battery clamp, black	600	Up to 1-1/2	50	1-3/0	35-95	8	218	20

WGC and CGC Series

- Large contact area assures excellent electrical contact.
- High clamping pressure.
- High alloy conductor assures maximum conductivity.
- 10 per carton.



Part No. WGC-600



Part No. CGC-600

Part No.	UPC No. 0 27719	AMP Capacity	Jaw Opening		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	kg.
CGC and WGC Series										
CGC-600	01192 9	600	Up to 4	100	1/0-4/0	50-105	8-1/4	205	63	1.8
WGC-600	01197 4	600	Up to 4	100	1/0-4/0	50-105	9-1/2	235	58	1.64

Cable Connectors

MBP Series

- Designed to efficiently conduct the current through a detachable-type connection.
- Cam-action design allows lock-in with a twist and pulls the two halves tightly together.
- Metal parts are precision machined from heavy brass extrusion- resists rust & corrosion.
- Connector covers have remarkable resistance to heat, cold, abrasion, ozone, oils & solvents. Tapered ends. Lock-out moisture, oil and dirt.
- Connector covers are specially compounded to be flame retardant.



Part No.	UPC No. 0 27719	Cable Capacity		Ctn
		AWG	mm ²	
MBP Series (paired)				
1-MBP	00831 8	4-1	16-35	10
2-MBP	00836 3	1/0-3/0	50-95	10
4-MBP	00841 7	3/0-4/0	95-105	10

Part No.	UPC No. 0 27719	Cable Capacity		Ctn
		AWG	mm ²	
Male				
1-MBP-1	00846 2	4-1	16-35	20
2-MBP-1	00851 6	1/0-3/0	50-95	20
4-MBP-1	00856 1	3/0-4/0	95-105	20
Female				
1-MBP-2	00861 5	4-1	16-35	20
2-MBP-2	00866 0	1/0-3/0	50-95	20
4-MBP-2	00871 4	3/0-4/0	95-105	20
Sleeves				
1-MBP-IS	For: 1-MBP (pair)			
2-MBP-IS	For: 2-MBP (pair)			
4-MBP-IS	For: 4-MBP (pair)			

Euro Cable Plug & Socket

Dinse® Style

- Introducing the finest international Dinse® style, Euro cable plug and sockets for use on most welding power sources.
- Simple and safe- just plug-in and tighten by a short, strong turn for positive stop-lock action and maximum conductivity.



Part No. SK-25



Part No. BK-25



Part No. SK-50



Part No. BK-50



Part No. SK-70



Part No. BK-70



Part No. SK-95



Part No. BK-95

Part No.	UPC No. 0 27719	Cable Capacity		Ctn
		AWG	mm ²	
DINSE® Style- Euro Cable Plug				
SK-25	00876 9	6-2	10-25	10
SK-50	00881 3	1-1/0	35-50	10
SK-70	00886 8	1/0-2/0	50-70	10
SK-95	00891 2	2/0-3/0	70-95	10
DINSE® Style- Euro Cable Socket				
BK-25	00896 7	6-2	10-25	10
BK-50	00901 8	1-1/0	35-50	10
BK-70	00906 3	1/0-2/0	50-70	10
BK-95	00911 7	2/0-3/0	70-95	10

Euro Cable Adapter

Dinse® Style to Pearson®

- Euro cable adapter (Dinse® style to Pearson®) allows to interconnect with most other types of U.S. Cable connectors - allows complete flexibility.



Part No. DA-5095



Part No. DA-1025

Part No.	UPC No. 0 27719	Cable Capacity		Ctn
		AWG	mm ²	
Euro Cable Adapter (DINSE® Style to Pearson®)				
DA-1025	00272 9	6-2	10-25	10
DA-5095	00916 2	1/0-3/0	50-95	10

Cable Connectors / Cable Lugs / Crimping Tools

Cable Connectors and Cable Lugs Euro Machine Panel Plug & Panel Socket Dinse® Style

- Designed to efficiently conduct current on the widest range of welding units and inverter-based power sources.
- Simple and safe- just plug-in and tighten by a short, strong turn for positive stop-lock action and maximum conductivity.



Part No.	UPC No. 0 27719	Cable Capacity		Ctn
		AWG	mm ²	
Panel Plug				
SE-1025	00921 6	6-2	10-25	10
SE-3570	00926 1	1-2/0	35-70	10
Panel Socket				
BE-1025	00931 5	6-2	10-25	10
BE-3570	00936 0	1-2/0	35-70	10
BE-7095	00941 4	2/0-3/0	70-95	10

Cable Lugs Solder Type

- Precision made from copper tubing.
- Extra long barrel for easy soldering or possible connection.
- Easy to use- flared-end for easy cable access.



Part No.	UPC No. 0 27719	AMP Capacity	Cable Capacity		Stud Hole		I.D. of Socket		Pcs./Card	Ctn
			AWG	mm ²	Inches	mm	Inches	mm		
L-68*	01202 5	75	6-8	8-10	21/64	8.3	10/32	8.0	10	10
L-46*	01207 0	100	4-6	10-16	21/64	8.3	11/32	8.5	10	10
L-62*	00946 9	150	6-2	10-25	17/32	13.5	1/2	13	10	5
L-120*	00951 3	200	1-2/0	35-70	17/32	13.5	35/64	14	10	5
L-3040*	00956 8	250	3/0-4/0	95-105	17/32	13.5	5/8	16	5	5

*Also available in bulk.

Hammer-on Type

- Easy and convenient to use- no special tools required.
- Hammer blow makes a solid connection.
- Excellent pull-out strength without soldering or bolting.



Part No.	UPC No. 0 27719	AMP Capacity	Cable Capacity		Stud Hole		I.D. of Socket		Pcs./Card	Ctn
			AWG	mm ²	Inches	mm	Inches	mm		
HL-62*	01212 4	150	6-2	10-25	17/32	13.5	1/2	13	10	5
HL-21*	00976 6	200	2-1	25-35	17/32	13.5	1/2	13	5	5
HL-1020*	00981 0	300	1/0-2/0	50-70	17/32	13.5	35/64	14	5	5
HL-3040*	00986 5	500	3/0-4/0	95-105	17/32	13.5	5/8	16	5	5

*Also available in bulk.

Crimper™ Heavy-Duty Crimping Tool

- Heavy duty, double slide support for rigidity.
- Durable spring-loaded mechanism holds terminal/lug in place.
- Delivers 1400-1800 lbs. (635-815 kg.) pull-out resistance (terminal to cable).
- Deep throat for easy insertion of terminal/lug fitted on cable end.
- Easy-to-read scale on both sides of drive punch prevents under-crimping.
- Wide base for stability- excellent for welding to a bumper of fleet service truck or for bolting to a bench.



Part No. CM-20

Part No.	UPC No. 0 27719	Description	Cable Capacity		Jaw Opening		Weight	
			AWG	mm ²	Inches	mm	oz.	grams
CM-20	00476 1	Crimping tool	6-4/0	10-105	Up to 1	25	24	680

4-Way Pick Set

- Knurled 5" (125 mm) aluminum handle.
- Four tempered steel picks 3" (75 mm) long screw into handle.
- Comes with handy vinyl protective case.
- Ideal for:
 - Remove stuck parts from tight areas.
 - Retrieve lost nuts, bolts, washers, tools etc.
 - Replace O-rings.
 - Ideal for die layouts.
 - Marking your tools.
- 10 per carton.




Part No. PS-4 (UPC No. 0 27719 03381 5)

Ratch-It Tie Downs with Chains

RT-112 and RT-115

- Rated capacity:
 - RT-112 - 1,500 lbs/680 kg (average strap strength)
 - RT-115 - 3,000 lbs/1360 kg (average strap strength)
- Quick Automatic Release.
- Rust resistant, cadmium plated steel hardware.
- Weather resistant straps.
- Vinyl coated hooks at each end that won't scratch (RT-112).
- High strength, bright safety yellow webbing with hook at each end to attach directly or loop back on to "D" ring (RT-115).
- RT-112S is excellent for "Single Handed Use" (Comes without end hooks).



Part No. RT-112



Part No. RT-115

RT-212C and RT-227C

- Rated at high capacity:
 - RT-215C - 10,000 lbs/4540 kg (average strap strength).
 - RT-227C - 15,000 lbs/6800 kg (average strap strength).
- Fully adjustable for securing large, heavy or bulky loads.
- Rust resistant, cadmium plated steel hardware.
- Heavy-duty anchor chain at each end with grab hook.
- Extra-wide and long ratchet handle provides extra leverage.
- Weather resistant straps.
- Strong, lightweight and rugged 100% polyester webbing, Identified by bright yellow safety straps.
- RT-212C comes with ratchet handle protector: Heavy duty sewn fabric pad used to protect surface finish of cargo and ratchet mechanism ratchet handle protectors, wear pads help protect cargo and extend life of the tie down.



Part No. RT-227C

RT-215 and RT-227

- Rated at high capacity.
 - RT-215 - 5,000 lbs/2270 kg (average strap strength).
 - RT-227 - 10,000 lbs/4540 kg (average strap strength).
- Fully adjustable ratchet tie down used to secure large, heavy or bulky loads.
- Webbing is made with strong, lightweight and rugged 100% polyester, identified by bright yellow safety strap.




Part No. RT-215

Part No.	UPC No. 0 27719	Size (ft) W x L	Grab Hook	Max. Cap. (Lbs.)	Avg. Strap (Kg)	Weight (Lbs.)	Ctn/Case Pack
RT-112	00686 4	1" x 12'	5/16"	1,500	680	1	10/40
RT-115	00691 8	1" x 15'		3,000	1360	1.5	10/20
RT-215	00696 3	2" x 15'		5,000	2270	6.5	1/5
RT-227	00711 3	2" x 27'		10,000	4540	7	1/5
RT-212C	00716 8	2" x 12' (chain 5/16" x 12")	5/16"	10,000	4540	7.85	1/5
RT-227C	00721 2	2" x 27' (chain 3/8" x 12")	3/8"	15,000	6800	11.25	1/5

Rubber Tarp Straps

- Super strength compounded rubber lasts longer.
- Ozone, weather, wear, tear and abrasion resistant.
- Resists deterioration in outdoor environments.
- Reinforced ends.
- Cadmium plated sturdy steel "S" hooks.
- 10 per carton.
- 100 per case pack.



Part No.	UPC No. 0 27719	Length
RS-21	01759 4	21"
RS-31	01760 0	31"
RS-41	01761 7	41"

Cam-Type and Fillet Weld Gage / Lightnin' Bug

MasterGage™

- High quality stainless steel (sus 304) blades to resist rust and for longer life.
- Permits quick and accurate measuring of the most popular weld fillet sizes in inch and metric : 1/8" - 1" (3.2 - 25.4 mm).
- For inspection of concave or convex fillet welds.
- Blades are deburred for fine and smooth edges.
- All sizes and numerals are laser etched into the surface for clarity and easier reading.
- Set of seven blades comes in a handy, vinyl pocket case with snap lock.
- Measurements are possible either in inches or millimeters. General linear measurements up to 2" (50 mm).
- 10 per carton.

Part No. MG-8: Cam-type weld gage
(UPC No. 0 27719 01278 0)


Part No. MG-11: Fillet weld gage
(UPC No. 0 27719 01279 7)

Cam-Type Weld Gage



Part No. MG-8

MASTERGAGE™



Back View

Fillet Weld Gage




Part No. MG-11

Guide for Taking Measurements with MasterGage™


Important Note:

MasterGage™ welding gages are intended for general dimensional inspection of welded fabrications where close tolerances are not expected. They should not be compared in precision with gages used for measuring machined components and where highest degree of accuracy is required. Where extremely precise measurements are required, machine shop precision measuring instruments, preferably electronic or digital must be used.

MG-8

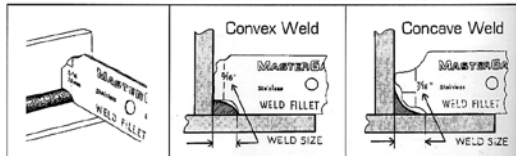

MG-11

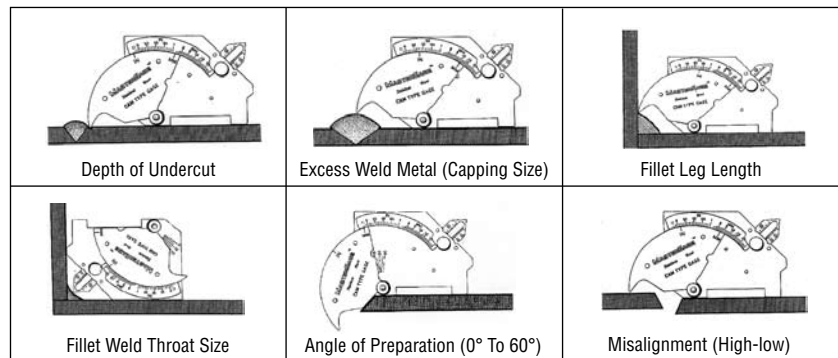

Lightnin' Bug® Torch Lighter

- Tested to 30,000 strikes.
- Lightnin' Bug® is the hottest little torch lighter on the market. Its electric multi-spark discharge ignites all fuel gases quickly and easily.
- The amazing new energy generator used in Lightnin' Bug® never needs flints, batteries or charging.
- Easy and accurate ignition insured by multi-spark discharge: 5 times or more per squeeze.
- Durable: made of high quality materials, the Lightnin' Bug® withstands severe working conditions. Its zinc plated body resists rust and corrosion.
- Versatile: Lightnin' Bug® ignites almost all industrial fuel gases, such as oxy-acetylene, natural gas, propane, methane, MAPP®, propylene, etc.
- 10 per carton

Part No. 08-100 (UPC No. 0 27719 01319 0)

Lightnin' Bug® is registered trademark of Worldwide Welding, Inc.



Tip Cleaners / Tip Drill Kit / Tip Refacing Tool / Key Ring

Tip Cleaners

- Rust proof, stainless steel wire.
- File included in the case.
- Uniform ridges wipe and polish the orifice wall.
- Tangle free loops.
- Tapered-ends allow smooth easy entry without scratching.
- 10 per carton.

Standard, Deluxe

Set of 13 cleaners with file.

- Gage sizes: 6 through 26 for cleaning drill size: 77-49.

Part No. 0STC (UPC No. 27719 01714 3)



King Size

Set of 13 extra-long cleaners with file.

- Gage sizes: 6 through 26 for cleaning drill size: 77-49.

Part No. 0KTC (UPC No. 27719 01715 0)



Jumbo

Set of 9 cleaners with file.

- Gage sizes: 28 through 45 for cleaning drill size: 48-30.

Part No. 0JTC (UPC No. 27719 00198 2)



Master

Set of 22 cleaners combines all standard and jumbo sizes with file.

- Gage sizes: 6 through 45 for cleaning drill size: 77-30.

Part No. 0MTC (UPC No. 27719 01716 7)



Master Set (0MTC)

Gage	Wire Dia.	Ridge Dia.	Cleans Hole	
			Diameter (inch)	Drill Size
6	0.014	0.016	.018 - .020	77 - 76
7	0.018	0.020	.021 - .022	75 - 74
8	0.021	0.023	.024 - .026	73 - 71
10	0.024	0.026	.028 - .031	70 - 68
12	0.028	0.030	.032 - .035	67 - 65
14	0.032	0.034	.036 - .038	64 - 62
15	0.035	0.038	.039 - .040	61 - 60
16	0.037	0.040	.041 - .042	59 - 58
17	0.039	0.042	.043 - .046	57
18	0.042	0.044	.046 - .051	56
22	0.048	0.050	.052 - .055	55 - 54
24	0.055	0.057	.060 - .064	53 - 52
26	0.062	0.065	.067 - .073	51 - 49
28	0.069	0.075	.076 - .078	48 - 47
30	0.074	0.080	.081 - .082	46 - 45
32	0.078	0.085	.086 - .089	44 - 43
34	0.085	0.092	.094 - .096	42 - 41
37	0.090	0.096	.100 - .102	39 - 38
39	0.095	0.102	.104 - .106	37 - 36
42	0.102	0.108	.110 - .113	35 - 33
44	0.108	0.114	.116 - .120	32 - 31
45	0.102	0.126	.128 +	30 +

Standard (STC) and King Sets (KTC)

Jumbo Set

Tip Drill Kit – 12 Piece

- Most practical tip cleaning tool made.
- Cleans and trues most standard orifices.
- Contains most commonly used 12 drills (#52-74) in assorted sizes.
- Complete with built-in chuck and pocket clip.
- 10 per carton.

Part No. TDK-12 (UPC No. 0 27719 00122 7)



Tip Refacing Tool

- Revolutionary tool that eliminates scale, slag and orifice distortion from cutting tip faces.
- Just a few quick turns and the tipster restores the face of your tips to their clean, original condition.
- Holding the tip in the proper refacing position is easy with the tough, nylon shell.
- 10 per carton.

Part No. TR-38 (UPC No. 0 27719 00110 4)



Welder's Pin Key Ring

- Handy for welders and repairmen-keys are safe and secure.
- Attaches easily to a strap, belt loop or a handle.
- Made from high quality steel with high lustre brass finish.
- Resists rust and corrosion.
- Individually poly-bagged.

Part No. BK-110



Medical & MIG Cart / Spark Lighters

MIG Welding Cart

- 3 Shelves.
 - Caster wheels.
 - Weight capacity 125 lbs.
- Part No. WC-1228



Medical Cart

- Will hold 1 D or E cylinder.
- Part No. MC-1DE



Cadymate Cylinder Container

- Holds 10 lb. cylinders.
 - Storage space in winder.
- Part No. CM-1020



Handyguard

- Holds up to 10 lbs. of 12" or 14" electrodes.
 - Withstands temperatures up to 225° F (107° C).
- Part No. HG-14 - 14"
Part No. HG-18 - 18"
Part No. HG-36 - 36"



Single Flint and Triple Flint Spark Lighters

- Rounded-file spark lighters feature the largest hood and round file in the industry.
- Triple-flint lighter is a quality lighter made for the demand of the welding industry. It has a strong frame and with three large flints makes dependable ignition under all weather conditions.
- Enduring popularity is merited by dependable performance, ease of operation, lightweight and low-cost.



Part No. 2001



Part No. 2001F



Part No. 4501



Part No. 4501F

Part No.	UPC No. 0 27719	Description	Ctn/Case
2001	00002 2	Single flint spark lighter, bulk (boxed)	10/100
2001-C	00003 9	Single flint spark lighter, carded	10
2001F	00022 0	Replacement flints for single flint spark lighter, (5 pcs./Holder), 20 holders/box (bulk)	5/50
2001F-C	00023 7	Replacement flints for single flint spark lighter, (5 pcs./Holder), 1 holder/card	
2001F-C2	00024 4	Replacement flints for single flint spark lighter, (5 pcs./Holder), 2 holders/card	10
4501	00004 6	Triple flint spark lighter, bulk (boxed)	10/100
4501-C	00005 3	Triple flint spark lighter, carded	10
4501F	00025 1	Replacement flints for triple flint spark lighter, bulk (boxed)	100/1000
4501F-C	00052 7	Replacement flints for triple flint spark lighter, carded (1 pcs./Card)	10
4501F-C5	00053 4	Replacement flints for triple flint spark lighter, carded (5 pcs./Card)	10

General Accessories / Locking Pliers / C-Clamps

Hands-Off™ Chisel Grip

The Hands-Off™ Chisel Grip keeps hands away from the point of contact. It is ergonomically designed to match the specific shape of the human hand for a comfortable and firm grip.

- Economical and permits faster, safer, more accurate work.
- Easy adjustment to hold a variety of chisels and stakes up to 1" diameter.
- Vibration-absorbing handle.
- Eases awkward hand positioning.
- Spark resistant.


Part No. 10040018



Ergonomic Tool Holders

- Holds wrenches, chisels, etc.
- Vibration-absorbing design,
- Attach to broom handles and mops for better grip.
- Eases awkward hand positioning.

Part No.	Description
507005	Tool Holder, 18"
507006	Tool Holder, spark resistant, 18"



Weld Clamp 9", 2-Jaw

- Holds parts in proper alignment - even when material is not of identical thickness.
- Positive lock leaves hands free.
- Deep-throated U-shaped jaws provide perfect visibility.
- 10 per carton

Part No. WC-9 (UPC No. 0 27719 00125 8)



Locking Pliers, 6" and 11"

- High grade alloy steel for maximum durability and performance.
- Micro-adjustment for quick pre-adjusting and repeat clamping.
- Powerful locking mechanism prevents slippage.
- Jaws open wide for versatility.
- Locks securely with hand squeeze.
- Easy-release trigger.
- 10 per carton

Part No. LC-6 (UPC No. 0 27719 00138 8)
Part No. LC-11 (UPC No. 0 27719 00137 1)



Locking Sheet Metal Tool, 8"

- Locks to work with powerful grip for smooth and accurate bending and seaming.
- Micro-adjusting screw and easy release trigger.
- Locks to work with powerful grip.
- Makes all kinds of bending, forming and crimping jobs faster and easier.
- 10 per carton


Part No. LS-8 (UPC No. 0 27719 00139 5)



Heavy Duty, Drop Forged C-Clamps

- Rugged, heavy duty drop forged steel frame.
- Non-slip clamping on all shapes.
- Extra throat depth.
- Steel spindles are copper plated for spatter protection.
- Swivel pads adjust freely to bear evenly on clamped part.
- Lacquered finish.
- Individually boxed for easy storage and protection.

Part No. 412P
Part No. 410P
Part No. 408P



Part No.	UPC No. 0 27719	Throat Capacity		Depth		Spindle Dia.		Proof Test		Ctn
		Inches	mm	Inches	mm	Inches	mm	lbs.	Kg	
402P	01333 6	0 - 2-1/8	0-54	2-1/4	57	9/16	14	3500	1590	20
404P	01334 3	0 - 4-1/2	0-114	3-1/4	83	3/4	19	6200	2810	10
406P	01336 7	0 - 6-1/16	0-154	4-1/8	105	3/4	19	6900	3130	10
408P	01337 4	0 - 8-1/4	0-210	5	127	3/4	19	6600	3000	5
410P	01338 1	2 - 10-1/8	50-257	6	152	3/4	19	8000	3630	5
412P	01341 1	2 - 12-1/4	50-311	6-5/16	160	7/8	22	9300	4220	5

Malleable Iron C-Clamps

- New design frame for maximum strength.
- Steel spindles are copper plated for spatter protection.
- Swivel pads adjust freely to bear evenly on clamped part.
- Lacquered finish.

Part No. CC-6
Part No. CC-5





Part No.	UPC No. 0 27719	Throat Capacity		Depth		Spindle Dia.		Ctn
		Inches	mm	Inches	mm	Inches	mm	
CC-2	00054 1	0 - 2	0-50	1-1/8	28	7/16	11	10
CC-3	00055 8	0 - 3	0-75	1-5/8	40	7/16	11	10
CC-4	00107 4	0 - 4	0-100	2-1/4	56	7/16	11	10
CC-5	00108 1	0 - 5-1/4	0-130	2- 5/8	65	1/2	13	10
CC-6	00109 8	0 - 5-7/8	0-147	3-1/4	83	5/8	16	10

Welters / Clamps / Telescoping and Magnetic Tools

Welper® YS-50 MIG Plier

- Specialty multi-purpose tool designed specifically for CO₂ welding operations.
- A single pair which serves eight purposes for MIG welding- saves time and increases productivity.
- Designed for hammering, wire cutting, insulation bushing removal & installation and drawing out wire.
- Ideally suited for the removal of spatter from inside, outside and the nozzle-end.
- Perfect for removal and installation of contact tips and nozzles.
- Spring loaded for easy opening and closing.
- Manufactured from high quality carbon steel for strength and durability.
- The genuine MIG plier (worldwide patented).
- Convenient blister packaging for "point-of-purchase" display.
- 10 per carton.

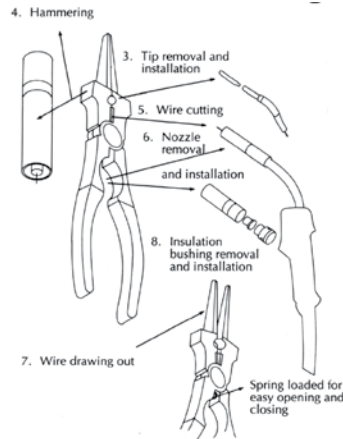

Part No. YS-55



Part No. YS-50

Part No.	UPC No. 0 27719	Description	Weight	
			oz.	grams
YS-20	03261 0	Plier, mini-MIG	6.4	181
YS-25	00282 8	Holster for YS-20		
YS-50	00456 3	Welper™, MIG plier	10	285
YS-55	00461 7	Holster for YS-50		

WGC and CGC Series

- Large contact area assures excellent electrical contact.
- High clamping pressure.
- High alloy conductor assures maximum conductivity.
- 10 per carton.



Part No. WGC-600



Part No. CGC-600

Part No.	UPC No. 0 27719	AMP Capacity	Jaw Opening		Cable Capacity		Length		Weight	
			Inches	mm	AWG	mm ²	Inches	mm	oz.	kg.
CGC and WGC Series										
CGC-600	01192 9	600	Up to 4	100	1/0-4/0	50-105	8-1/4	205	63	1.8
WGC-600	01197 4	600	Up to 4	100	1/0-4/0	50-105	9-1/2	235	58	1.64

Magnet with Telescopic Handle, 30" Reach

- Lifts 10 lbs. (4.5 kg).
 - Telescopes from 7" (180 mm) to 30" (760 mm).
 - Telescopic handle is lightweight and strong.
 - Cap shields the sides of the magnet from attaching to unwanted metal surfaces.
 - Comfortable textured cushion grip keeps handle secure even in wet or oily hands.
 - Pocket clip keeps it handy and secure.
- Part No. TM-10 (UPC No. 0 27719 00283 5) 10 per carton
Part No. TM-10-B (bulk, case pack only) 100 per carton



Mirror with Flex Handle, 15" Reach

- Fast, accurate visual inspection of hidden areas.
 - Offers limitless number of positions.
 - Withstands the stresses of constant repositioning.
 - Non-slip handle.
 - 10 per carton.
- Part No. FM-15 (UPC No. 0 27719 00123 4)



Magnet with Flex Handle, 15" Reach

- Neodymium-Iron-Boron extra high flux magnet for greater pick-up.
 - Outperforms standard Alinco V magnet 4 to 1.
 - Powerful enough to pick up ferrous objects weighing 1.5 lbs (680 g).
 - Long 15" (380 mm) overall reach.
 - Perfect tool to pick up ferrous metal objects in hard-to-reach angles and remote areas.
 - A bendable copper shaft enables you to retrieve at hard-to-reach angles and around objects.
 - 10 per carton.
- Part No. FM-14 (UPC No. 0 27719 00123 4)



Mirror with Telescoping Handle, 15" Reach

- Fast, accurate visual inspection of hidden areas.
 - Almost offers limitless number of positions.
 - Double ball joint links swivel mirrors for viewing to 360°.
 - Non-rotating hex rods prevent mirror from swinging out of alignment when in use.
 - Precision engineered links withstand the stresses of constant repositioning, move freely, hold desired position.
 - Insulating vinyl grip.
 - Mirror size: 2-1/8" x 3-1/2" (52 mm x 88 mm)
 - Overall length: 11" (280 mm), extends to 15" (380 mm).
- Part No. OK-2 (UPC No. 0 27719 00286 6) 10 per carton
Part No. K-2-B (bulk, case pack only) 100 per carton



Chipping Hammers / Cable Cutters / Cable Hitch

Weld-Cleaning Tools (Chipping Hammers)

- Complete line of weld-cleaning tools - each tool designed for special application.
- Manufactured under a rigid quality and safety control program.
- Hammer heads are hardened to precisely controlled temperatures for durability and strength.
- Wide-blade design removes slag faster and adds to the life of the tool.
- Drop forged, heat-treated, hardened head withstands more grinds.
- Long, slender cones assure easy slag removal.
- Welded-on-head to steel shaft - prevents head from coming loose.
- Well-balanced handle grip for comfort and ease-of-use.
- 10 per carton.



Part No.	UPC No. 0 27719	Description	Length		Weight	
			Inches	mm	oz.	grams
0H-E		Cone and chisel, coil handle economy model	12	290	14	397
000H	01006 9	Cone and chisel, coil handle heavy duty	11	280	16	440
G-E-BULK		Cone and cross chisel, coil handle, economy	11	280	15	415
000G	01011 3	Cone and cross chisel, coil handle	11	280	15	415
000J	01016 8	Cone and chisel, wooden handle	11	280	13	365
7002	01021 2	Cone and chisel, soft grip handle	11	280	14	397
000A	01026 7	Brush and chisel, brush locking thumb screw	11	280	17	480
00AW	01222 3	Brush and chisel, wooden handle	12	275	17	480
WH-10	00690 1	Chisel and cross chisel, wooden handle	12	275	16	440
WH-20	01031 1	Cone and chisel, wooden handle	13	325	23	650
WH-30	01036 6	Cone and cross chisel, wooden handle	13	325	23	650
WH-40	01041 0	Curved cone and curved chisel, wooden handle	13	325	24	680

Chipping Hammer Replacement Parts



Part No. CH-315



Part No. 00WH

Part No.	UPC No. 0 27719	Description
CH-315	01267 4	Wire brush
00WH	01262 9	Wooden handle

Barracutter™ Cable Cutter

- High carbon steel hand shear for cutting welding cable through 4/0 (105 mm²), power cable through 6/4 (65 mm) and rubber hose through 1/2" (13 mm).
- Excellent for maintenance, repair, rigging, fabrication, tool cribs, out-fitting splicing and many others.
- No jaws to replace.
- Heavy vinyl covered safety handles.
- 10 per carton



Part No.	UPC No. 0 27719	Cable Capacity	
		AWG	mm ²
B-52	00481 5	6-4/0	10-105

Caution: Designed for copper and aluminum cables only.

Clitch™ Cable Hitch

Hooked to a support near the work area, the Clitch™ frees the welder from the cable weight. It allows the cable to be pulled through but will not let it slip back.


- Made to fit cable size:
 - AWG #2 (25 mm²) through AWG 4/0 (105 mm²) or
 - 5/8" (16 mm) through 7/8" (22 mm) in diameter.
- 10 per carton.

Part No. CH-240



Part No.	UPC No. 0 27719	Cable Capacity	
		AWG	mm ²
CH-240	00155 5	2 - 4/0	25-105

CLITCH




High Rise



Building Construction



Ship Construction



Television Towers



Electrical Towers

Soapstone / Pocket Scribe / Pencils

White-Line™ Soapstone and Soapstone Holders

1 Select, Natural Grade

- The finest quality soapstone available in the world.
- All white texture for excellent marking quality.
- Grain cut to ensure good strength and long service life.
- Marks will not contaminate welds and are easily removed.
- Low water content for increased hardness and resistance to breakage.



Soapstone Holders

All holders come with our #1 select soapstone

- Stainless steel body, aluminum knob.
- Steel nut holds # 1 select soapstone firmly.
- Comes with pocket clip.

Part No.	UPC No. 0 27719	Description	UM	Ctn.
NS-16	01310 7	Flat soapstone, bulk	144 pcs./pack	12/288
WL-F5-6	00527 0	Flat soapstone	6 pcs./card	10
WL-512	01430 2	Flat soapstone holder	1 per card	1
WL-512-B		Flat soapstone holder, bulk	case pack	100
NS-16A	01311 4	Round soapstone, bulk	144 pcs./pack	12/432
WL-R5-10	00532 4	Round soapstone	10 pcs./card	10
WL-514	01431 9	Round soapstone holder	1 per card	1
WL-514-B		Round soapstone holder, bulk	case pack	100
NS-16B	01312 1	Square soapstone, bulk	144 pcs./pack	12/432
WL-S5-10	00537 9	Square soapstone	10 pcs./card	10
WL-516	01343 5	Square soapstone holder	1 per card	1
WL-T5	00533 1	Thin line soapstone, bulk, 1/16	144 pcs./pack	12/432
WL-T5-10	00538 6	Thin line soapstone, 1/16	10 pcs./card	10
WL-518	00528 7	Thin line soapstone holder, 1/16	1 per card	1

Pocket Scribe

- Lightweight, yet strong aluminum handle.
- Sharp tungsten carbide tip cuts into hard surfaces, leaves clear marks on metal, glass, plastic, tools etc.
- Comes with protective tip cover- protects against damaged points, torn cloth and punctured fingers.
- Handy pocket clip.
- 10 per carton.

Part No. ES-4 (UPC No. 0 27719 01438 8)



Eclipse™ Welding Helmets

- Exclusive design: contemporary profile and narrow shell design engineered to maximize performance and enable welders to work more efficiently and comfortably with increased productivity.
- Safe to use: extended head, face, neck and ear coverage protects against sparks and slag - preventing burns and harmful ultra-violet and infra-red rays.
- Lightweight: reduces stress on welder's neck and back muscles.
- Streamlined design: allows you to work in tight space. Easy, adjustable knobs, even with the gloves on.
- Strong and durable: withstands heavy on-the-job abuse.
- Non-reflective surface: absorbs stray radiation and avoids arc flash.
- Ergonomically engineered: scientifically balanced for easy "nod down."
- Excellent ventilation: channels smoke and fumes away from the welder. Makes breathing easier and a unique shape that allows room for respirators.
- Unique magnifier lens holder: built-in magnifier holder is adjustable to multiple positions.
- Adaptable: to most auto-darkening filters.
- Helmet includes shade 10 filter plate, safety plate (standard size) and adjustable locking ratchet headgear with sweatband.
- Meets or exceeds ANSI Z87.1 & CE standards.



Part No. ADF-54F



Part No. EH-24L

Part No.	Description
Passive	
EAD-24F	2" X 4-1/4" fixed shade 10
EAD-54F	4-1/2" x 5-1/4" fixed shade 10
ADF-24F	2" X 4-1/4" fixed shade 10
ADF-54F	4-1/2" x 5-1/4" fixed shade 10
Auto-Darkening	
EH-24F*	2" X 4-1/4" fixed front, fixed shade 10
EH-24L *	2" X 4-1/4" lift front, fixed shade 10
EH-54F*	4-1/2" x 5-1/4" fixed front, fixed shade 10
Headgear	
OERH*	Adjustable ratchet headgear

*Also available in bulk.

Lift/Fixed-Front Combo Welding Helmets

- New innovative design- single model acts as a lift or a fixed front.
- High performance, super tough and economical.
- Tougher and lighter than ordinary helmets - flexible and durable shell.
- Streamlined, compact design allows welders to get into tight places.
- Features innovative integral lens holder.
- Excellent resistance to welding spatter.
- Pivot tabs relieve pressure on temples.
- Adjustable tension for up and down shell movement without removing helmet.
- Ratchet adjustable headgear is soft and comfortable with foam fitting vinyl sweatband.
- Meets/exceeds ANSI Z87.1, CSA Z94.3, CE and various international standards.



Part No. NS-24BF



Part No. NS-45B



Part No. HS-24

Part No.	UPC No. 0 27719	Description	Ctn
NS-24BF*	00202 6	Fixed front welding helmet, 2" x 4-1/4", economy, black	1
NS-24B*	02890 3	Lift/fixed front combo, welding helmet, 2" x 4-1/4", black	1
NS-45BF*	00396 2	Fixed front welding helmet, 4-1/2" x 5-1/4", economy, black	1
NS-45B*	02893 4	Lift/fixed front combo, welding helmet, 4-1/2" x 5-1/4", black	1
HS-24	00197 5	Hand held welding shield, 2" x 4-1/4" shade 10	10
RC-24	02899 6	Replacement flip-up lens cartridge, for 2" x 4-1/4" helmet	10
RC-45	02900 9	Replacement flip-up lens cartridge, or 4-1/2" x 5-1/4" helmet	10
OORH	02898 9	Adjustable ratchet headgear for helmet	10

*Also available in bulk.