

Hotspotters / Weed Burners

Hotspotters

This all purpose propane flame tool operates off of the pressure of a standard propane tank - no regulator required. Appropriate for a wide variety of all - season maintenance/ repair applications at commercial offices, factories, institutions, warehouses, parks, residential properties, farms and parking lots.

- Delivers 500,000 BTU.
- No smoke, no fumes.
- Burn weeds, repair asphalt, seal tar, peel paint, remove road markings, melt ice, and thaw pipes.
- Durable 10 ft. neoprene hose.
- Accurate brass flow control shut-off valve.
- Brass propane tank adaptor.
- Spark ignitor.
- Durable cast iron and steel nozzle (WB-101).
- Welded tube nozzle (WB-102).
- 31" heavy-duty handle.
- Meets NFPA 51 specifications.
- Packaged in retail, self-service packaging.
- One year warranty.



Part No. WB-101



Part No. WB-102



Part No. WB-100

Part No.	Description
WB-101	Heavy Duty
WB-102	Standard Duty
WB-100	Professional
Replacement Parts	
WB-100-25	10' Hose Assembly for WB-101 and WB-102 only
WB-100-13	Handle Assembly - for WB-101 only
WB-100-19	Handle Assembly - for WB-102 only



WEED Burning
ICE Melting
PAINT Removal
ROOFING Repair

HUNDREDS
of
USES!

ASPHALT Repair
SNOW Removal
TAR Sealing
PREHEATING Metal

Flow Gauge & Flowmeter Regulators

REB Series Flow Gauge Regulators for Inert Gas

REB Series flow gauge regulators offer an economical, lightweight alternative to standard flowmeter units. These single stage regulators include a delivery gauge that is dual calibrated in standard cubic feet per hour (SCFH) for both argon and carbon dioxide. The flow gauge works in conjunction with a metering outlet orifice to deliver precise gas flow. Gas flow is adjustable to meet the requirements of MIG and TIG welding applications.



Part No. REB-3-FG

- Machined brass body resists corrosion.
- Dual scale flow gauge calibrated for argon and carbon dioxide services.
- Durable neoprene diaphragm maintains consistent flow rates.
- Protective inlet filtering system extends regulator life.
- FGD models include 6 ft. neoprene hose with fittings in self-service retail packaging.
- Large 2" gauges are easy to read.
- PCTFE seat assembly.
- Weight: 1 lb., 13 oz.
- Size: (6" L x 3-3/4" W x 4-1/4" H).
- Three year warranty.
- Made in the U.S.A.

Part No.	CGA inlet/ Gas Service	Flow Capacity SCFH	Delivery Flow Gauge	Inlet Pressure PSIG	Outlet Connections (both provided)
REB-3-FG	580 Argon	0-35	0-35	0-3000	9/16"-18 RHM and 5/8"-18 RHF
REB-3-FGD*	580 Argon	0-35	0-35	0-3000	9/16"-18 RHM and 5/8"-18 RHF
REB-4-FG	320 Carbon Dioxide	0-35	0-35	0-3000	9/16"-18 RHM and 5/8"-18 RHF
REB-4-FGD*	320 Carbon Dioxide	0-35	0-35	0-3000	9/16"-18 RHM and 5/8"-18 RHF

*FGD models include 6 ft. neoprene hose with fittings

RS Series Flow Gauge Regulators

The RS Series flow gauge regulators offer a practical, economical alternative to more expensive flowmeter units. Not limited to only "vertical" operation, these regulators operate in a variety of positions. The RS Series utilizes Western's "pressure compensated" (COMP1™) design. For applications that require high flow rates, this design provides more consistent delivery pressure by minimizing fluctuation over a wide range of inlet pressures.



Part No. RS-3-FG

- Machined brass body resists corrosion.
- 2" reinforced neoprene diaphragm provides durability.
- Dual inlet filtering system extends regulator life.
- Large 2" dual scale gauges are easy to read.
- Self re-seating relief valve protects against over-pressurization.
- Weight: 3 lbs.
- Size: (4-1/16" L x 6-3/8" W x 5-7/8" H).
- Three year warranty.
- Made in the U.S.A.

Part No.	CGA Inlet/ Gas Service	Flow Capacity SCFH	Inlet Pressure PSIG	Outlet Connections
RS-3-FG	580 Argon	0-60	0-3000	5/8"-18 RHF
RS-4-FG	320 Carbon Dioxide	0-60	0-3000	5/8"-18 RHF

REF Series Flowmeter Regulators (Piston Style)

REF Series models combine a single stage piston regulator with a flow tube to provide an economical, lighter weight alternative to more expensive diaphragm style flowmeter regulators. The REF series is designed to meet the requirements of professional welders.



Part No. REF-3-P



Part No. REF-3-PG

- Machined brass body resists corrosion.
- Durable brass piston design.
- Built-in cylinder contents indicator forewarns when cylinder is near depletion (gaugeless models).
- Dependable PTFE seat assembly.
- Dual inlet filtering system extends regulator life.
- Durable flowtube with large, easy-to-read gradients and shatter-resistant cover.
- Dual calibrated tube for argon and carbon dioxide service.
- Back pressure compensated flowmeter.
- Sensitive needle valve for fine adjustment.
- PD & PGD models include 6 ft. neoprene hose w/ fittings in self service retail packaging.
- Weight: 1 lb., 8 oz.
- Size: (2-1/4" L x 5" W x 7-3/4" H).
- Three year warranty.
- Made in the U.S.A.

Part No.	Display Pack No.	CGA Inlet/Gas Service PSIG	Inlet Pressure	Flow Capacity SCFH	Outlet Connections (both provided)
REF-3-P	REF-3-PD*	580 Argon	0-3000	0-70	9/16"-18 RHM and 5/8"-18 RHF
REF-3-PG	REF-3-PGD*	REF 580 Argon, w/gauge	0-3000	0-70	9/16"-18 RHM and 5/8"-18 RHF
REF-4-P	REF-4-PD*	320 Carbon Dioxide	0-3000	0-70	9/16"-18 RHM and 5/8"-18 RHF
REF-4-PG	REF-4-PGD*	320 Carbon Dioxide w/gauge	0-3000	0-70	9/16"-18 RHM and 5/8"-18 RHF

*PD & PGD models include 10 ft. neoprene hose with fitting

Flowmeter Regulators

RF Series Flowmeter Regulators (Diaphragm Style)

RF Series models combine a single stage diaphragm regulator with a flowmeter to provide precise flows for the professional welder, laboratory, or industrial process user. A high pressure gauge keeps the user informed of the cylinder's content.

- Anodized aluminum body resists corrosion.
- PCTFE seat assembly withstands high service pressures.
- Dual inlet filtering system extends product life.
- Durable flow tube with large, easy to read gradients and shatter resistant cover.
- Dual calibrated flow tube for argon and carbon dioxide services.
- Sensitive needle valve for fine adjustment.
- Back pressure compensated flowmeter.
- Durable neoprene diaphragm.
- Weight: 1lb., 3 oz.
- Size: (3" L x 6-1/2" W x 8-1/2" H).
- Three year warranty.
- Made in the U.S.A.



Part No. RF-3-P

Part No.	CGA Inlet/ Gas Service	Flow Capacity SCFH	Inlet Pressure PSIG	Outlet Connections (both provided)
RF-3-P	580 Argon	0-70	0-3000	9/16"-18 RHM and 5/8"-18 RHF
RF-4-P	320 Carbon Dioxide	0-70	0-3000	9/16"-18 RHM and 5/8"-18 RHF

RFS & RFD Series Flowmeter Regulators

RFS & RFD Series models combine a single stage regulator with one (RFS Series) or two (RFD Series) flowmeters. These products also utilize Western's "pressure compensated" (COMP1™) design. For applications that require high flow rates, this design provides more consistent delivery pressure by minimizing fluctuation over a wide range of inlet pressures. Designed for users who require precise flows, these products are ideal for the professional welder, laboratory, or industrial process user.

A high pressure gauge keeps the user informed of the cylinder's content.

- Machined brass body resists corrosion.
- Easy-to-read 2" pressure gauge.
- Durable neoprene diaphragm maintains consistent flow rates.
- Dual inlet filtering system extends regulator life.
- Self-reseating pressure relief valve protects against over-pressurization.
- Durable flow tube with large, easy to read gradients and shatter-resistant cover.
- Dual calibrated flow tube for argon and carbon dioxide services.
- Back pressure compensated flowmeter improves flow accuracy.
- Nickel chrome plated zinc bonnet.
- Sensitive, easily adjusted needle valve on flowmeters.
- Weight: RFS = 3 lbs., 3 oz. RFD = 4 lbs., 10 oz.
- Size: RFS = 7-1/2" L x 4-1/2" W x 6-3/4" H
RFD = 10-3/8" L x 4-1/2" W x 7" H.
- Three year warranty.
- Made in the U.S.A.



Part No. RFS-3-P

Part No.	CGA Inlet/ Gas Service	Flow Capacity SCFH	Inlet Pressure PSIG	Outlet Connections (both provided)
RFS-3-P	580 Argon	0-50	0-3000	9/16"-18 RHM and 5/8"-18 RHF
RFS-4-P	320 Carbon Dioxide	0-50	0-3000	9/16"-18 RHM and 5/8"-18 RHF
RFS-7-P	580 Nitrogen	0-50	0-3000	9/16"-18 RHM and 5/8"-18 RHF
RFD-3-P	580 Argon	0-50	0-3000	9/16"-18 RHM and 5/8"-18 RHF
RFD-4-P	320 Carbon Dioxide	0-50	0-3000	9/16"-18 RHM and 5/8"-18 RHF

RWS Series Flowmeters

RWS Series Flowmeters provide accurate measurement of gas flow in welding and laboratory applications. The economical design is back pressure compensated to improve flow accuracy.

- Durable flow tube with large, easy to read gradients and shatter-resistant cover.
- Dual calibrated tube for argon and carbon dioxide services.
- Sensitive, easily adjusted needle valve.
- Protective inlet filter extends flowmeter life.
- Weight: 8 oz.
- Size: (1-1/2" L x 2-1/4" W x 6-1/2" H).
- Three year warranty.
- Made in the U.S.A.



Part No. RWS-2-13

Part No.	Gas Service	Flow Capacity SCFH	Inlet Connection	Calibrated Inlet Pressure PSIG	Outlet Connections
RWS-2-7	Nitrogen	0-100	1/8" NPT F	50	9/16"-18 RHM and 5/8"-18 RHF
RWS-2-13	Argon/CO ₂ (Dual Calibrated)	0-70	1/8" NPT F	50	9/16"-18 RHM and 5/8"-18 RHF

Regulators

Preset Flow Regulator (F.R.O.G.)

RP Series models are flow regulated orifice gauges (F.R.O.G.) designed to supply a preset flow of inert shielding gas for metal inert gas (M.I.G.) welding applications. A patented cylinder contents indicator forewarns the user when the cylinder is near depletion. The single stage piston design provides value and performance for small jobs and the "weekend welder".

- Machined brass body resists corrosion.
- Protective inlet filter extends regulator life.
- Internal safety relief guards against over-pressurization.
- Hose barb outlet for 3/16" or 1/4" ID hose.
- Easy to use—preset flow requires no adjustment.
- Dependable brass piston with PTFE Seat.
- Delivers 30 SCFH argon and 22 SCFH CO₂.
- Weight: 9.5 oz.
- Size: (3-3/8" L x 1-1/8" W x 1-3/8" H).
- One year warranty.
- Made in the U.S.A.



Part No. RP30580

Part No.	CGA Inlet / Gas Service	Capacity SCFH	Inlet Pressure PSIG	Hose Barb Outlet
RP22320	320 Carbon Dioxide	22	0-3000	Works with 3/16" and 1/4" ID hose
RP30580	580 Argon	30	0-3000	Works with 3/16" and 1/4" ID hose
RP30580G*	580 Argon	30	0-3000	Works with 3/16" and 1/4" ID hose

*RP30580G includes gauge

Preset Pressure Regulator

RP Series models are designed to supply a preset pressure for portable CO₂ applications. The economical design offers pressure selection from 30 PSIG to 200 PSIG.

- Machined brass body resists corrosion.
- Protective inlet filter extends regulator life.
- Internal safety relief vent protects against over-pressurization.
- 1/4" NPT side port outlet.
- Easy to use – preset pressure requires no adjustment.
- Dependable solid brass piston with PTFE seat.
- Weight: 9.5 oz.
- Size: (3-3/8" L x 1-1/8" W x 1-3/8" H).
- One year warranty.
- Made in the U.S.A.



Part No.	CGA Inlet	Max. Inlet Pressure PSIG	Preset Output Pressure PSIG	Side Outlet Port
RP320030	320 Carbon Dioxide	3000	30	1/4" NPT F
RP320050	320 Carbon Dioxide	3000	50	1/4" NPT F
RP320075	320 Carbon Dioxide	3000	75	1/4" NPT F
RP320100	320 Carbon Dioxide	3000	100	1/4" NPT F
RP320125	320 Carbon Dioxide	3000	125	1/4" NPT F
RP320150	320 Carbon Dioxide	3000	150	1/4" NPT F
RP320175	320 Carbon Dioxide	3000	175	1/4" NPT F
RP320200	320 Carbon Dioxide	3000	200	1/4" NPT F

REB Series Light Duty, Single Stage Regulators

REB Series models are ideally suited for applications requiring a portable, lightweight, compact regulator. Typical applications include use in plumbing, light duty cutting and welding.

- Machined brass body resists corrosion.
- Neoprene diaphragm is sensitive yet durable to maintain consistent delivery pressure.
- Dual inlet filtering system extends regulator life.
- Large 2" dual scale gauges are easy to read.
- PCTFE seat assembly.
- Weight: 1 lb., 13 oz.
- Size: (6" L x 3-3/4" W x 4-1/4" H).
- Three year warranty.
- Made in the U.S.A.



Part No.	CGA Inlet / Gas Service	Delivery Pressure Range PSIG	Max. Rated Flow SCFH	Inlet Pressure PSIG	Outlet Connections
REB-1-1	510 Acetylene	0-15	230	0-400	9/16"-18 LHM
REB-1A-1	300 Acetylene	0-15	230	0-400	9/16"-18 LHM
REB-4-3	320 Carbon Dioxide	0-100	800	0-3000	9/16"-18 RHM
REB-9-3	540 Oxygen	0-100	1000	0-3000	9/16"-18 RHM

ST Series High Pressure Step Down Regulators

The patented design of the ST Series regulators allows for the use of conventional regulators with high pressure cylinders. These regulators deliver high flow rates while reducing high cylinder pressures to lower pressures that conventional regulators are designed to handle. This eliminates the need for a second set of equipment when working with high pressure cylinders. To install, remove the CGA inlet connection from the regulator and replace it with the ST regulator.



Part No. ST680

- Durable solid brass construction resists corrosion.
- Protective inlet filter extends regulator life.
- Reliable piston and seat assembly.
- For use with 6000 PSIG cylinders.
- Three year warranty.
- Made in the U.S.A.

Part No.	Gas Service	Max Inlet Pressure PSIG	Max Flow Pressure SCFH	Outlet Connection
ST347	347 Compressed Air	5500	6000	1/4" NPT M
ST577	577 Oxygen	4000	5700	1/4" NPT M
ST680	680 Inert Gases	5500	6,120 (Nitrogen)	1/4" NPT M
ST695	695 Flammable	5500	N/A	1/4" NPT M
ST701	701 Oxygen	5500	5700	1/4" NPT M

Regulators

RS Series Medium Duty Single Stage Regulators

RS Series models are for applications that require high flow rates, this design provides more consistent delivery pressure by minimizing fluctuation over a wide range of inlet pressures. These regulators are appropriate for industrial, welding, laboratory and general use applications. Certain models feature a 1/4" NPT outlet connection for high pressure applications.

- Machined brass body resists corrosion.
- 2" reinforced neoprene diaphragm.
- 450 PSIG models have KEL-F® seat to accommodate high pressure applications.
- Dual inlet filter system extends regulator life.
- Hydrogen and methane models equipped with pipe away relief valves.
- Most models include self-reseating pressure relief valve (except for RS-1-1, RS-1A-1, RS-10-2).
- Nickel chrome plated zinc bonnet.
- Large 2" gauges with easy to read gradients.
- Weight: 3 lbs.
- Three year warranty.
- Made in the U.S.A.



Part No. RS-2-4

Part No.	CGA Inlet / Gas Service	Delivery Pressure Range PSIG	Maximum Flow SCFH	Inlet Pressure PSIG	Outlet Connection
RS-1-1*	510 Acetylene	0-15	420	0-400	9/16"-18 LH M
RS-1A-1*	300 Acetylene	0-15	420	0-400	9/16"-18 LH M
RS-2-3*	346 Air	0-80	3000	0-3000	9/16"-18 RH M
RS-2-4*	346 Air	0-180	6500	0-3000	1/4" NPT F
RS-2-4H	346 Air Hand-Tight	0-180	6500	0-3000	1/4" NPT F
RS-2-5	346 Air	0-450	10,000	0-3000	1/4" NPT F
RS-4-3*	320 Carbon Dioxide	0-80	2200	0-3000	9/16"-18 RH M
RS-4-4*	320 Carbon Dioxide	0-180	5000	0-3000	9/16"-18 RH M
RS-6-3*	350 Hydrogen, Methane	0-80	12,880	0-3000	9/16"-18 LH M
RS-6-4*	350 Hydrogen, Methane	0-180	28,400	0-3000	9/16"-18 LH M
RS-7-3*	580 Inert Gases	0-80	3430	0-3000	9/16"-18 RH M
RS-7-4*	580 Inert Gases	0-180	7570	0-3000	9/16"-18 RH M
RS-7-5	580 Inert Gases	0-450	8500	0-3000	1/4" NPT F
RS-8-3*	326 Nitrous Oxide	0-80	2200	0-3000	9/16"-18 RH M
RS-8-4*	326 Nitrous Oxide	0-180	5000	0-3000	9/16"-18 RH M
RS-9-3*	540 Oxygen	0-80	3230	0-3000	9/16"-18 RH M
RS-9-4*	540 Oxygen	0-180	7100	0-3000	9/16"-18 RH M
RS-9-5	540 Oxygen	0-450	7900	0-3000	1/4" NPT F
RS-10-2*	510 Liquefied Fuel Gases	0-45	1380	0-3000	9/16"-18 LH M

* UL Listed

- Do not have self-reseating pressure relief valve

Purging/Testing Regulators

The REB-7-5AC is ideal for HVAC applications. This regulator is designed specifically for nitrogen purging of air conditioning and refrigeration systems at pressures up to 450 PSIG. For applications that require high flow rates, the design provides more consistent delivery pressure by minimizing fluctuation over a wide range of inlet pressures.

Delivers dependable performance from an economical regulator.

- Machined brass body resists corrosion and extends service life.
- PCTFE seat assembly withstands high service pressures.
- Durable tee handles.
- Sintered inlet filter.
- Easy-to-read 2" gauges.
- Three year warranty.
- Made in the U.S.A.
- Compact, lightweight design.
- Weight: 1 lb., 14 oz.
- Size: (6" L x 3-3/4" W x 4-1/4" H).



Part No. REB-7-5AC

Part No.	CGA Inlet/ Gas Service	Delivery Pressure Range PSIG	Maximum Flow SCFH	Inlet Pressure PSIG	Outlet Connection
REB-7-5AC	580 Nitrogen	0-450	1500	0-3000	1/4" SAE flare

Regulators / Gas Saver

RS Series High Delivery Pressure Regulators (Piston Style)

RS Series models feature a compact, reliable piston design and are recommended for applications requiring high delivery pressures, up to 2000 PSIG. These regulators provide precision operation under the most demanding conditions. When installed with a Stage1™ high-pressure stem regulator, RS models are appropriate for use with high pressure cylinders (up to 6000 PSIG).

- Machined brass body and bonnet resists corrosion and extends service life.
- Dependable brass piston design.
- Large 2-1/2" gauges with easy-to-read gradients.
- PCTFE seat assembly withstands high service pressures.
- Dual inlet filtering extends regulator life.
- 1/4" NPT female outlet, 180° opposed to inlet.
- Inlet pressures up to 3000 PSIG standard, upgradable to 6000 PSIG by combining with a STAGE 1™ regulator.
- Weight: 4 lbs., 8 oz.
- Size: (6-1/2" L x 7" W x 5-1/2" H).
- Three year warranty.
- Made in the U.S.A.



Part No. RS-11-15

Part No.	CGA inlet/ Gas Service	Delivery Pressure Range PSIG	Maximum Flow SCFH	Outlet Connections
RS-9-15	540 Oxygen	0-1500	2500	1/4" NPT F
RS-9-20	540 Oxygen	0-2000	2800	1/4" NPT F
RS-11-15	580 Inert	0-1500	2550 (N ₂)	1/4" NPT F
RS-11-20	580 Inert	0-2000	2850 (N ₂)	1/4" NPT F

RHP Series High Inlet / High Delivery Pressure Regulator

RHP Series regulators are designed for use with high pressure cylinders (up to 6000 PSIG) and are capable of delivering up to 4500 PSIG. Select models include a delivery flow gauge or flowmeter for MIG and TIG applications. Certain models feature Western's "pressure compensated" COMP1™ design. For applications that require high flow rates, this design provides more consistent delivery pressure by minimizing fluctuation over a wide range of inlet pressures.

- Diaphragm models feature a machined brass body with nickel chrome plated bonnet for exceptional service life.
- Piston models constructed with a durable all-brass body.
- PCTFE seat assembly withstands high service pressures.
- Re-seating relief valve protects against over pressurization.
- Dual safety relief valves and dual inlet filtering extends regulator life.
- Low friction, replaceable Delrin® thrust bushing extends service life.
- Large gauges are easy to read—2" gauges on diaphragm models and 2-1/2" gauges on piston models.
- Weight: 3 lbs.
- Size: (4-1/2" L x 7" W x 6" H).
- Three year warranty.
- Made in the U.S.A.



Part No. RHP-2-4

Part No. RS-11-15

Part No.	Style	CGA Inlet/ Gas Service	Delivery Pressure Range PSIG	Maximum Flow SCFH	Outlet Connections
RHP-2-4*	Diaphragm	347 Compressed Air	0-180	3200	1/4" NPT F
RHP-2-5*	Diaphragm	347 Compressed Air	0-450	3700	1/4" NPT F
RHP-2-30	Piston	347 Compressed Air	0-3000	2964	1/4" NPT F
RHP-2-45	Piston	347 Compressed Air	0-4500	3735	1/4" NPT F
RHP-9-15	Piston	577 Oxygen	0-1500	2500	1/4" NPT F
RHP-11-4*	Diaphragm	680 Inert	0-180	3260	1/4" NPT F
RHP-11-15	Piston	680 Inert	0-1500	2550	1/4" NPT F
RHP-11-20	Piston	680 Inert	0-2000	2850	1/4" NPT F
RHP-11-30	Piston	680 Inert	0-3000	3014	1/4" NPT F
RHP-11-45	Piston	680 Inert	0-4500	3798	1/4" NPT F

RPB-3 Gas Saver

The RPB-3 Gas Saver eliminates gas surge with the start of each weld and maintains uniform flow in MIG and TIG welding applications. Easily installed and adjusted, this unit connects to any Flowmeter or Flow Gauge Regulator outlet.

- Machined aluminum body.
- Chrome plated zinc bonnet.
- Durable reinforced neoprene diaphragm.
- Factory set at 4 PSIG but easily adjustable to meet a range of requirements.
- Weight: 1 lb.
- Size: (3" L x 2" W x 5-3/4" H).
- Three year warranty.
- Made in the U.S.A.



Part No. RPB-3

Part No.	Service	Inlet Connection	Inlet Pressure PSIG	OutletConnection
RPB-3	Argon (CO ₂)	5/8"-18 RH M	0-200	9/16"-18 RH M & 5/8"-18 RH F

Manifold, In-Line and Line Station Regulators

RM Series Single Stage Manifold Regulators

RM Series manifold regulators feature a pressure compensated single stage design (oxygen is two-stage) that delivers stable delivery pressure performance comparable to a two stage design. The unique cartridge permits easy, single-unit replacement of vital parts in minutes. The cartridge allows the seat, nozzle, filter, spring, seals and built-in check-relief valve to be replaced without special tools and without breaking the bonnet-to-body seal. The cartridge can be removed and a new one installed without costly down time or removing the regulator from the pipeline.

WMR Series In-Line Regulators

The WMR Series In-line Regulators are designed for installation in pipe lines that require large gas volumes. These regulators provide high gas flows from gas distribution systems. Maximum inlet pressure 400 PSIG.

WSR Series Line Station

Line station regulators utilize a large diaphragm for high sensitivity and provide extremely accurate delivery pressure. Maximum inlet pressure 200 PSIG.



Part No. WSR-1-1



Part No. WMR-2-2



Part No. RM-7-4

Part No.	Gas Service	Delivery Lockup	Flowing Pressure	Gas Flow	Delivery Range PSIG	Max Inlet Pressure PSIG	Inlet Connection	Outlet Connection	Replacement Cartridge No.
RM-1-1	Acetylene	15	10	850	1-15	400	1 - 11-1/2" NPS LH M	1 - 11-1/2" NPS LH F	RWC-3-59
RM-2-4	Compressed Air	50	45	960	20-160	3000	1 - 11-1/2" NPS RH M	1 - 11-1/2" NPS RH F	RWC-3-49
RM-4-4	Carbon Dioxide	50	45 40	960 2100	20-160	3000	1 - 11-1/2" NPS RH M	1 - 11-1/2" NPS RH F	RWC-3-49
RM-6-4	Hydrogen	50	45 40	960 2100	20-160	3000	1 - 11-1/2" NPS LH M	1 - 11-1/2" NPS LH F	RWC-3-49
RM-7-4	Nitrogen, Helium and Argon	50	45 40	960 2100	20-160	3000	1 - 11-1/2" NPS RH M	1 - 11-1/2" NPS RH F	RWC-3-49
RM-8-4	Nitrous Oxide	50	45 40	960 2100	20-160	3000	1 - 11-1/2" NPS RH M	1 - 11-1/2" NPS RH F	RWC-3-49
RDM-9-3	Oxygen	50	45 40	310 950	20-100	3000	1 - 11-1/2" NPS RH M	1 - 11-1/2" NPS RH F	RWD-2-19 1st Stage RWD-2-36 2nd Stage
RDM-9-4	Oxygen	50	45 40	310 950	20-160	3000	1 - 11-1/2" NPS RH M	1 - 11-1/2" NPS RH F	RWD-2-19 1st Stage RWD-2-36 2nd Stage
RM-10-2	LPG Fuel Gas	45	40 35	480 940	0-45	400	1 - 11-1/2" NPS LH M	1 - 11-1/2" NPS LH F	RWC-3-59
RS-300-MAN	Nitrogen	170	160 150	800 1422	40-300	3000	1 - 11-1/2" NPS RH M	1 - 11-1/2" NPS RH F	RK-1022 (repair kit)

Part No.	Inlet/Outlet Connection (Female)	Delivery Pressure PSIG	Air at 50 PSIG 100 PSIG inlet SCFH	Air at 100 PSIG 250 PSIG Inlet Delivery SCFH	Gauge Pressure Range
WMR-2-2	1/2" NPT	1-50	3,000	3,000	0-100
WMR-2-3	3/4" NPT	50-125	11,000	21,000	0-200
WMR-2-4	1/2" NPT	50-125	5,000	10,000	0-200
WMR-2-5	1/2" NPT	100-200	3,500	12,500	0-400
WMR-2-6	3/4" NPT	100-200	6,000	20,000	0-400
WMR-2-8	1" NPT	100-200	6,000	20,000	0-400

Part No.	Gas Service	Delivery Lock-Up	Flowing Pressure SCFH	Flow Connection SCFH	Inlet	Outlet Connection
WSR-1-1	Oxygen	125 PSIG	120	760	7/8"-14 RH F, CGA-024	9/16"-18 RH M, CGA-022
WSR-1-2	Acetylene	15 PSIG	10	420	7/8"-14 LH F, CGA-025	9/16"-18 LH M, CGA-023

Balloon Inflators

Economy Rental Inflators

Economy hand tight rental inflators are durable, easy-to-install and easy-to-use. The rubber tilt valve is simple to replace if it gets damaged due to excessive wear and tear. Models are available with or without contents gauge. 3000 PSIG maximum inlet pressure. One year warranty. Made in the U.S.A.



Part No. R125G
Replacement Gauge: WMG-75

Deluxe Rental Inflators

Deluxe rental inflators provide for quick filling of latex balloons. Most models feature a large, easy-to-use hand tight cylinder connection to make installation simple and quick. Available with or without cylinder contents gauge. 3000 PSIG maximum inlet pressure. Two year warranty. Made in the U.S.A.



Part No. RPB-6HG
Replacement Gauge: WMG-75

Professional Foil/Latex Balloon Inflators

Foil and latex balloon inflators are designed to quickly inflate foil balloons to the same size every time. An automatic shut-off for foil balloons eliminates costly balloon breakage. The latex filling outlet is available with a push valve or tilt valve for fast inflation of balloons. The large hand tight connection provides for easy attachment to a cylinder. 3000 PSIG maximum inlet pressure. Two year warranty. Made in the U.S.A.



Part No. BR4HG
Replacement Gauge: G-18-4000W



Part No. RPB-62HGV
Replacement Gauge: WMG-75

Part No.	CGA Inlet	Description
R125*	580	Economy hand tight inflator
R125G	580	Economy hand tight inflator with contents gauge
RPB-6	580	Deluxe inflator, wrench connection
RPB-6G	580	Deluxe inflator with gauge, wrench connection
RPB-6H	580	Deluxe inflator, hand tight connection
RPB-6HG	580	Deluxe inflator, hand tight connection with gauge
RPB-62HGV	580	Dual inflator, foil filler with tilt valve, hand tight connection, gauge
BR4HG	580	Dual inflator, vertical design, foil filler with tilt valve, hand tight connection, tie hook, ribbon cutter

*Sold in retail clamshell packaging

Replacement Valve and Tip Attachments



Part No. RPB-5-1FV

Part No.	Description
Valves	
RPB-5-1V	1/4" male npt tilt valve
RPB-5-2V	1/4" male npt tilt valve with mylar tip
RPB-5-1FV	Replacement mylar tip for tilt valve
RPB-5-1P	1/4" male npt push valve*
Tips	
RPB-5-1F	Mylar balloon tip attachment
RPB-5-1L	Latex balloon tip attachment
RPB-5-1N	Needle tip for valved, plugged latex balloons
RPB-5-1X	Helium/air mixer attachment (60% helium/40% air)
RPB-5-1Z	Adjustable helium/air mixer

*Accepts all tips listed above

A, B, C, and D Size Fittings

Hose Nuts

Pressures To 200 PSIG (1400 kPa)



Part No.	Description	Size	Service	Material
A-Size (3/8"-24 Thread) *B-Size (9/16"-18 Thread)				
0009	Oxygen RH	A-Size	CGA-020	Brass
0010	Acetylene/F. Gases LH	A-Size	CGA-021	Brass
0007	Oxygen RH	B-Size	CGA-022	Brass
SS-7	Oxygen RH	B-Size	CGA-022	St. Steel
0008	Acetylene/F. Gases LH	B-Size	CGA-023	St. Steel
SS-8	Acetylene/F. Gases LH	B-Size	CGA-023	St. Steel
C-Size (7/8"-14 Thread) *D-Size (1-1/4"-12 Thread)				
0C-7	Oxygen RH	C-Size	CGA-024	Brass
0C-8	Acetylene/F. Gases LH	C-Size	CGA-025	Brass
0D-7	Oxygen RH	D-Size	CGA-026	Brass
0D-8	Acetylene/F. Gases LH	D-Size	CGA-027	Brass

Barbed Hose Nipples

Pressures To 200 PSIG (1400 kPa)



Part No.	Description	Size	Length	Material
A-Size (Use 9 or 10 Nut) *B-Size (Use 7 or 8 Nut)				
0019	3/16" ID Hose	A-Size	1-1/4"	Brass
0018	3/16" ID Hose	B-Size	1-15/32"	Brass
0017	1/4" ID Hose	B-Size	1-15/32"	Brass
SS-17	1/4" ID Hose	B-Size	1-15/32"	St. Steel
07-W*	1/4" ID Hose	B-Size	1-15/32"	Brass
0216	5/16" ID Hose	B-Size	1-15/32"	Brass
0020	3/8" ID Hose	B-Size	1-15/32"	Brass
20-A	3/8" ID Hose	B-Size	1-3/4"	Brass
C-Size (Use C-7 or C-8 Nut) *D-Size (Use D-7 or D-8 Nut)				
C-20	3/8" ID Hose	C-Size	2"	Brass
C-19	1/4" ID Hose	C-Size	1-19/32"	Brass
C-18	1/2" ID Hose	C-Size	2-1/4"	Brass
C-17	1/2" ID Hose	C-Size	3-3/4"	Brass
D-17	1/2" ID Hose	D-Size	3-3/16"	Brass
D-18	3/4" ID Hose	D-Size	3-1/2"	Brass

*W = With O-Ring

Spiral and NPT Hose Nipples

Pressures To 200 PSIG (1400 kPa)



Part No.	Description	Size	Length	Material
A-Size (Use 9 or 10 Nut) *B-Size (Use 7 or 8 Nut)				
0023	1/8" NPT	B-Size	1-1/2"	Brass
0013	3/16" ID Hose	A-Size	1-1/4"	Brass
0012	3/16" ID Hose	B-Size	1-13/32"	Brass
0011	1/4" ID Hose	B-Size	1-19/32"	Brass
0516	5/16" ID Hose	B-Size	1-19/32"	Brass
0138	3/8" ID Hose	B-Size	1-5/8"	Brass
C-Size (Use C-7 or C-8 Nut) *D-Size (Use D-7 or D-8 Nut)				
C-88	1/4" NPT	C-Size	2"	Brass
D-20	1/2" NPT	D-Size	2-1/2"	Brass

Regulator Outlet Bushings (Adaptors)

Pressures To 200 PSIG (1400 kPa)



Part No.	Description	Material
0132	1/8" NPT to A-Size RH	Brass
0133	1/8" NPT to A-Size LH	Brass
0134	1/4" NPT to A-Size RH	Brass
0135	1/4" NPT to A-Size LH	Brass
0136	1/8" NPT to B-Size RH	Brass
0137	1/8" NPT to B-Size LH	Brass
0032	1/4" NPT to B-Size RH	Brass
SS-32	1/4" NPT to B-Size RH	St. Steel
0033	1/4" NPT to B-Size LH	Brass
0142	3/8" NPT to B-Size RH	Brass
SS-142	3/8" NPT to B-Size RH	St. Steel
0143	3/8" NPT to B-Size LH	Brass

Part No.	Description	Material
0144	1/2" NPT to B-Size RH	Brass
0145	1/2" NPT to B-Size LH	Brass
C-34	1/4" NPT to C-Size RH	Brass
C-35	1/4" NPT to C-Size LH	Brass
C-40	3/8" NPT to C-Size RH	Brass
C-41	3/8" NPT to C-Size LH	Brass
C-32	1/2" NPT to C-Size RH	Brass
C-33	1/2" NPT to C-Size LH	Brass
D-34	1/2" NPT to D-Size RH	Brass
D-35	1/2" NPT to D-Size LH	Brass
D-32	3/4" NPT to D-Size RH	Brass
D-33	3/4" NPT to D-Size LH	Brass

Male NPT to Oxygen RH — Male NPT to acet./F. gases LH

Hose Couplers & Adapters

Hose Couplers, Brass

Pressures To 200 PSIG (1400 kPa)



Part No. 0030



Part No. 0131

Part No.	Description	Size
A-Size: CGA-020 RH & CGA-021 LH *B-Size: CGA-022 RH & CGA-023 LH		
0130	Oxygen RH, A-Size to A-Size	A-Size
0131	Acet/F. Gases LH, A-Size to A-Size	A-Size
0230	Oxygen RH, A-Size to B-Size	A-Size/B-Size
0231	Acet/F. Gases LH, A-Size to B-Size	A-Size/B-Size
0030	Oxygen RH, B-Size to B-Size	B-Size
0031	Acet/F. Gases LH, B-Size to B-Size	B-Size
C-Size: CGA-024 RH & CGA-025 LH *D-Size: CGA-026 RH & CGA-027 LH		
C-30	Oxygen RH, C-Size to C-Size	C-Size
C-31	Acetylene/F. Gases LH, C-Size to C-Size	C-Size
D-30	Oxygen RH, D-Size to D-Size	D-Size
D-31	Acetylene/F. Gases LH, D-Size to D-Size	D-Size

Hose Adaptors, Brass

Pressures To 200 PSIG (1400 kPa)



Part No. 0253



Part No. 0123



Part No. 0105



Part No. 24-0



Part No. 0541



Part No. 40-B

Part No.	Description	Gas
0107	90° Male NPT to Female B-Size, RH	Oxygen
0108	90° Male NPT to Female B-Size, LH	Acet/F. Gases
0127	45° 1/4" Male NPT to Male B-Size, RH	Oxygen
0128	45° 1/4" Male NPT to Male B-Size, LH	Acet/F. Gases
0253	90° 1/4" Male NPT to Male B-Size, RH	Oxygen
0254	90° 1/4" Male NPT to Male B-Size, LH	Acet/F. Gases
0123	1/4" Male NPT to Female Swivel B-Size, RH	Oxygen
0124	1/4" Male NPT to Female Swivel B-Size, LH	Acet/F. Gases
0125	1/4" Male NPT to Female Swivel A-Size, RH	Oxygen
0126	1/4" Male NPT to Female Swivel A-Size, LH	Acet/F. Gases
0153	Female Swivel B-Size to 1/4" Male NPT, RH	Oxygen
0154	Female Swivel B-Size to 1/4" Male NPT, LH	Acet/F. Gases
0234	1/4" Female NPT to Female Swivel B-Size, RH	Oxygen
0235	1/4" Female NPT to Female Swivel B-Size, LH	Acet/F. Gases
0244	1/4" Female NPT to Male B-Size, RH	Oxygen
0245	1/4" Female NPT to Male B-Size, LH	Acet/F. Gases
0103	Male A-Size to Female B-Size, RH	Oxygen
0104	Male A-Size to Female B-Size, LH	Acet/F. Gases
0105	Male B-Size to Female A-Size, RH	Oxygen
0106	Male B-Size to Female A-Size, LH	Acet/F. Gases

Part No.	Description	Size	Gas
14-0	Swivel to 1/4" ID Hose, RH	A-Size	Oxygen
0014	Swivel to 1/4" ID Hose, LH	A-Size	Acet/F. Gases
24-0	Swivel to 1/4" ID Hose, RH	B-Size	Oxygen
0024	Swivel to 1/4" ID Hose, LH	B-Size	Acet/F. Gases


Part No.	Description
0544	Male 1/8" NPT to 3/16" ID Hose
0545	Male 1/8" NPT to 1/4" ID Hose
0548	Male 1/8" NPT to 1/8" ID Hose
0540	Male 1/4" NPT to 3/16" ID Hose
0541	Male 1/4" NPT to 1/4" ID Hose
0542	Male 1/4" NPT to 5/16" ID Hose
0543	Male 1/4" NPT to 3/8" ID Hose
0549	Male 1/4" NPT to 1/8" ID Hose
0539	Male 3/8" NPT to 3/8" ID Hose
0537	Male 3/8" NPT to 1/4" ID Hose
C-42	Male 1/2" NPT to 1/2" ID Hose
0551	Female 1/8" NPT to 3/16" ID Hose
0552	Female 1/8" NPT to 1/4" ID Hose
0554	Female 1/4" NPT to 3/16" ID Hose
0555	Female 1/4" NPT to 1/4" ID Hose
0556	Female 1/4" NPT to 5/16" ID Hose
0557	Female 1/4" NPT to 3/8" ID Hose
0558	Female 3/8" NPT to 1/4" ID Hose

Part No.	Description	Gas
0040	Male B-Size, RH to 3/16" ID Hose Barbed	Oxygen
40-B	Male B-Size, RH to 1/4" ID Hose Barbed	Oxygen
0041	Male B-Size, LH to 3/16" ID Hose Barbed	Acet/F. Gases
41-B	Male B-Size, LH to 1/4" ID Hose Barbed	Acet/F. Gases

Hose Splicers, Torch Tip Nuts & Chain and Plug Assemblies

Hose Splicers, Brass

Pressures to 200 PSIG (1400 kPa)

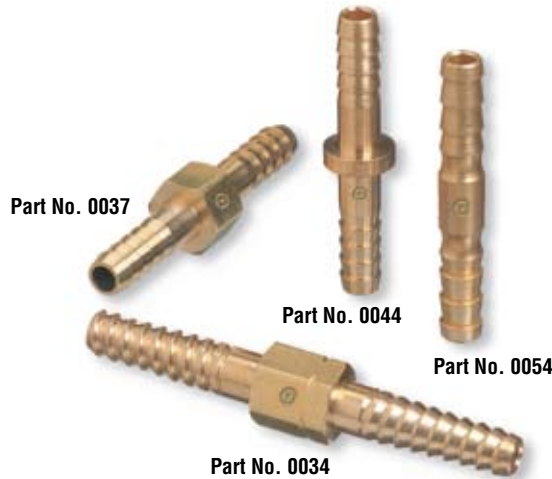

Part No.	Description	Style
0035	3/16" to 3/16" ID Hose	Spiral Hex
0034	1/4" to 1/4" ID Hose	Spiral Hex
0238	3/8" to 3/8" ID Hose	Spiral Hex
0038	3/16" to 3/16" ID Hose	Barb Hex
0039	3/16" to 1/4" ID Hose	Barb Hex
0037	1/4" to 1/4" ID Hose	Barb Hex
0139	5/16" to 5/16" ID Hose	Barb Hex
0149	3/8" to 3/8" ID Hose	Barb Hex
C-38	1/2" to 1/2" ID Hose	Barb Hex
D-38	3/4" to 3/4" ID Hose	Barb Hex
0045	3/16" to 3/16" ID Hose	Barb Round
0044	1/4" to 1/4" ID Hose	Barb Round
0046	5/16" to 5/16" ID Hose	Barb Round
0047	3/8" to 3/8" ID Hose	Barb Round
0048	1/2" to 1/2" ID Hose	Barb Round
0053	1/8" to 1/8" ID Hose	Barb No Stop
0055	3/16" to 3/16" ID Hose	Barb No Stop
0054	1/4" to 1/4" ID Hose	Barb No Stop
0056	5/16" to 5/16" ID Hose	Barb No Stop
0057	3/8" to 3/8" ID Hose	Barb No Stop
C-37	1/2" to 1/2" ID Hose	Barb No Stop

Torch Tip Nut Replacements/Tip Nuts for Cutting Torches & Attachments



Part No.	Thread Size	Material	Replaces
TN1-1	7/8" - 20	Brass	Harris 2459
TN1-2	7/8" - 20	Brass	Harris 6259-B
TN2-1	15/16" - 18	Brass	Victor 0309-0018
TN2-2	7/8" - 20	Brass	Victor 0309-0003
TN3-1	7/8" - 20	Brass	Linde 33-A-59
TN4-1	7/8" - 20	Brass	Airco 831-2259

Chain & Plug Assemblies, Brass

Pressure to 200 PSIG (1400 kPa)



Part No.	Description	Size	Service
B-Size (9/16"-18 thread) • C-Size (7/8"-14 thread) • D-Size (1 1/4"-12 thread)			
0927	2-Piece Assembly, Gas Tight Seal, Female Oxygen RH Nut & Plug	B-Size	CGA-022
0928	2-Piece Assembly, Gas Tight Seal, Female Acetylene LH Nut & Plug	B-Size	CGA-023
DC-B7	1-Piece Dust Cap, Not Gas Tight, Female Oxygen RH	B-Size	CGA-022
DC-B8	1-Piece Dust Cap, Not Gas Tight, Female Acetylene LH	B-Size	CGA-023
C-907	2-Piece Assembly, Gas Tight Seal, Female Oxygen, RH Nut & Plug	C-Size	CGA-024
C-908	2-Piece Assembly, Gas Tight Seal, Female Acetylene LH Nut & Plug	C-Size	CGA-025
DC-C7	1-Piece Dust Cap, Not Gas Tight, Female Oxygen RH	C-Size	CGA-024
DC-C8	1-Piece Dust Cap, Not Gas Tight, Female Acetylene LH	C-Size	CGA-025
D-907	2-Piece Assembly, Gas Tight Seal, Female Oxygen RH, Nut & Plug	D-Size	CGA-026
D-908	2-Piece Assembly, Gas Tight Seal, Female Acetylene, LH, Nut & Plug	D-Size	CGA-027

Inert Arc Fittings for MIG/TIG Torches

Inert Arc Nuts, Brass (TIG)

Pressures to 200 PSIG (1400 kPa)



Part No.	Description	Size	Service
A-Size (3/8"-24) *B-Size (5/8"-18) *C-Size (7/8"-14)			
0009	Inert Gas, Female RH	A-Size	CGA-020
0010	Water, Female LH	A-Size	CGA-021
AW-21	Water, Male LH	A-Size	CGA-031
AW-21A	Inert Gas, Male RH	A-Size	CGA-030
Use Above With AW-13, AW-24, A-Size Cable Nipples			
AW-7	Air-Water, Female RH	B-Size	-
Use Above With AW-30 and AW-32 Couplers			
AW-14	Water, Male LH	B-Size	CGA-033
AW-14A	Inert Gas, Male RH	B-Size	CGA-032
Use Above With All B-Size Inert Arc Nipples			
AW-10	Water, Male LH	C-Size	CGA-035
AW-10A	Inert Gas, Male RH	C-Size	CGA-034
Use Above With All C-Size Power Cable Nipples			

Inert Arc Nipples, Brass (TIG)

Pressures to 200 PSIG (1400 kPa)



Part No.	Description	Size
A-Size (3/8"-24) *B-Size (5/8"-18)		
AW-24	2" Long, Barb for 1/8" ID Hose	A-Size
AW-13	2" Long, Barb for 3/16" ID Hose	A-Size
<i>Use Above with 9, 10, AW-21, AW-21A Nuts</i>		
AW-3	2.175" Long, 1/8" NPT	B-Size
AW-16	2-7/32" Long, Barb for 1/8" ID Hose	B-Size
AW-17	2-7/32" Long, Barb for 1/4" ID Hose	B-Size
AW-18	2-7/32" Long, Barb for 3/16" ID Hose	B-Size
AW-19	2-7/32" Long, Barb for 3/8" ID Hose	B-Size
AW-20	2-7/32" Long, Barb for 5/16" ID Hose	B-Size
<i>Use Above with AW-14, AW-14A, AW-7 Nuts</i>		
AW-16B	1-13/32" Long, for 1/8" ID Hose, .190 OD	B-Size
AW-40	2" Long, Undersized 1/8" Barb	B-Size
AW-47	2-7/32" Long, Special 1/4" Barb	B-Size

Inert Arc Adaptors, Brass

Pressures to 200 PSIG (1400 kPa)



Part No.	Description	Size
Male to Female Air-Water Connections for Inert ARC Welding		
A-Size (3/8-24") *B-Size (5/8-18") *C-Size (7/8-14")		
AW-12	1/8" NPT Male to A-Size Female LH Water	A-Size
AW-12A	1/8" NPT Male to A-Size Female RH Inert Gas	A-Size
AW-152	1/8" NPT Male to B-Size Female LH Water	B-Size
AW-152A	1/8" NPT Male to B-Size Female RH Inert Gas	B-Size
AW-15	1/4" NPT Male to B-Size Female LH Water	B-Size
AW-15A	1/4" NPT Male to B-Size Female RH Inert Gas	B-Size
AW-28	9/16"-18 Male to B-Size Female LH	B-Size
AW-28A	9/16"-18 Male to B-Size Female RH	B-Size
AW-27	1/4" NPT Male to C-Size Female LH Water	C-Size
AW-27A	1/4" NPT Male to C-Size Female RH Inert Gas	C-Size

Inert Arc Fittings for MIG/TIG Torches

Inert Arc Hose & Torch Adaptors, Brass

Pressures to 200 PSIG (1400 kPa)



Part No.	Description
B-Size (5/8"-18)	
AW-403	RHM to CGA-022 9/16"-18 RHM
AW-404	LHM to B-Size RHM
AW-405	RHF to CGA-022 9/16"-18 RHF
AW-406	LHF to B-Size RHF
AW-407	RHM to B-Size RHF -90°
AW-408	RHM to B-Size LHF -90°
AW-409	RHM to B-Size RHM
AW-423	RHM to CGA-023 9/16"-18 LHM
AW-424	LHM to CGA-023 9/16"-18 LHM
AW-425	RHF to CGA-023 9/16"-18 LHF
AW-426	LHF to CGA-023 9/16"-18 LHF
AW-427	RHM to 1/4" NPT M
AW-428	LHM to 1/4" NPT M
AW-432	RHM to CGA-022 9/16"-18 RHF
AW-432B	9/16" - 18 F to 5/8" - 18 F
AW-433	RHM to CGA-023 9/16"-18 LHF

Inert Arc Hose Couplers, Brass

Pressures to 200 PSIG (1400 kPa)



Part No.	Description	Size
A-Size (3/8"-24) *B-Size (5/8"-18) *C-Size (7/8"-14)		
AW-430A	CGA-030 RH Female to A-Size RH Female	A-Size
AW-431A	CGA-031 LH Female to A-Size LH Female	A-Size
AW-430	CGA-032 RH Female to B-Size RH Female	B-Size
AW-431	CGA-033 LH Female to B-Size LH Female	B-Size
AW-430B	1/4" NPT Female to CGA-032 RH Female	B-Size
AW-431B	1/4" NPT Female to CGA-033 LH Female	B-Size
AW-430C	CGA-034 RH Female to C-Size RH Female	C-Size
AW-431C	CGA-035 LH Female to C-Size LH Female	C-Size

Inert Arc Air-Water Couplers, Brass

Pressures to 200 PSIG (1400 kPa)



Part No.	Description	Size
AW-30	Male RH to B-Size Male RH	B-Size
AW-32	1/4"-18 NPT Male to B-Size Male RH	B-Size
AW-34	Male RH to 9/16"-18 Male RH	B-Size
AW-35	Male LH to 9/16"-18 Male LH	B-Size

Inert Arc Power Cable Adaptors, Brass (TIG)

Pressures to 200 PSIG (1400 kPa)



Part No.	Description	Size
A-Size (3/8"-24) *B-Size (5/8"-18) *C-Size (7/8"-14)		
AW-110	RH Female to A-Size RH Female, 2-15/16" Long	B-Size
AW-105	RH Female to B-Size RH Female, 3/4" Hex, 2-1/8" Long	B-Size
AW-107	LH Female to B-Size LH Female, 3/4" Hex, 2-1/8" Long	B-Size
AW-108	RH Female to B-Size RH Female, 1-1/8" Hex, 2" Long	C-Size
AW-109	LH Female to B-Size LH Female, 1-1/8" Hex, 2" Long	C-Size

Inert Arc Fittings for MIG/TIG Torches

Inert Arc Power Cable Nipples & Connector Assemblies, Brass

Pressures To 200 PSIG (1400 kPa)



Part No.	Description	Size
One-Piece Power Cable Nipple & Tube Connector for Crimping A-Size (3/8"-24) • B-Size (5/8"-18)		
AW-44	1/8" ID Hose, .22 OD Tube, 1-3/4" Long	A-Size
AW-45	3/16" ID Hose, .245 OD Tube, 2-3/8" Long	A-Size
AW-46	3/8" ID Hose, .367 OD Tube, 2-3/4" Long	B-Size
B-Size Nipples with Copper Tube for Crimping Cable, use with AW-14 & AW-14A Nut B-Size (5/8"-18)		
AW-49	.219" OD Copper Tube, 2-3/8" Long Overall	B-Size
C-Size Nipples for Crimping Cable, use with AW-10 & AW-10A Nut C-Size (7/8"-14)		
AW-23	.312" OD Copper Tube, 3-11/32" Long	C-Size
AW-26	.225" OD Brass Tube, 1.45" Long	C-Size
AW-52	.375" OD Copper Tube, 3-3/8" Long	C-Size
AW-54	.312" OD Copper Tube, 3-1/32" Long	C-Size

Inert Arc Power Cable Nut, Nipples & Copper Tube Assemblies

Pressures To 200 PSIG (1400 kPa)



Part No.	Description
Assemblies with Copper Tube for Crimping Cable Copper or Brass Nipple & Swivel Nut	
AW-22	Nipple & .312 OD Copper Tube with Brass A-Size LH Swivel Nut, 2-13/16" Long
AW-22A	Nipple & .312 OD Copper Tube with Brass A-Size RH Swivel Nut, 2-13/16" Long
AW-25	Nipple & .312 OD Copper Tube with Brass A-Size Female Swivel Nut, 2-5/8" Long
AW-51	Nipple & .375" OD Copper Tube with 7/16"-20 Female Nut, 2-5/16" Long
AW-53	Nipple & .218" OD Copper Tube with RH 1/4"-28 Female Nut, 1-15/16" Long
AW-55	Nipple & .312" OD Copper Tube with 7/16"-20 Female Nut, 2" Long
AW-56	Nipple & .375" OD Copper Tube with 5/8"-18 RH Male Nut (AW14-A), 3-1/4" Long



Your Best Investment for Efficiency and Reliability.

Industrial Regulators • Flashback Arrestors
Quick Disconnects • Check Valves • Gas Fittings
Pigtails and Related Manifold Equipment

"Y" Connections and Valves

"Y" Connections, Brass

Pressures to 200 PSIG (1400 kPa)



Part No. 0101

Part No. 0401

Part No.	Description	Service
A-Size (3/8"-24 Thread) *B-Size (9/16"-18 Thread)		
0101	Oxygen RH: B-Size F Inlet to B-Size M Outlets	CGA-022
0102	Acetylene/F. Gases LH: B-Size F Inlet to B-Size M Outlets	CGA-023
0113	Oxygen RH: A-Size F Inlet to A-Size M Outlets	CGA-020
0114	Acetylene/F. Gases LH: A-Size F Inlet to A-Size M Outlets	CGA-021
0401	Inert Gas RH: 5/8"-18 M Inlet to 5/8"-18 F Outlets	CGA-032
0402	Water, Industrial Air LH: 5/8"-18 M Inlet to 5/8"-18 F Outlets	CGA-033
Pressures to 3000 PSIG (20,700 kPa)		
111-5	Short "Y" Connection: 1/4" NPT F Inlet to 1/4" NPT F Outlets	—
111-6	Short "Y" Connection: 1/8" NPT F Inlet to 1/4" NPT F Outlets	—

Valved "Y" Connections, Brass

Pressures to 200 PSIG (1400 kPa)

- For use of two cutting and/or two welding torches at once
- Precision shut off valves



Part No. 0111

Part No.	Description	Service
A-Size 3/8"-24 Thread *B-Size 9/16"-18 Thread		
0111*	Oxygen RH: B-Size F Inlet to B-Size M Outlets	CGA-022
0112*	Acetylene/F. Gases LH: B-Size F Inlet to B-Size M Outlets	CGA-023
0115	Oxygen RH: A-Size F Inlet to A-Size M Outlets	CGA-020
0116	Acetylene/F. Gases LH: A-Size F Inlet to A-Size M Outlets	CGA-021
0411	Inert Gas RH: 5/8"-18 M Inlet to 5/8"-18 F Outlets	CGA-032
0412	Water, Industrial Air LH: 5/8"-18 M Inlet to 5/8"-18 F Outlets	CGA-033

*Sold in retail clamshell packaging

Valves, Brass

Pressures to 200 PSIG (1400 kPa)



Part No. WSV-1-1P

Part No.	Description	Service	Gas
1/2" NPT Male Inlet • 7/8"-14 CGA Male Outlet			
WSV-1-1	RH, Gas Tight Plug/Chain	CGA-024	Oxygen
WSV-1-2	LH, Gas Tight Plug/Chain	CGA-025	Fuel Gas
WSV-1-1P	RH, No Outlet Protection	CGA-024	Oxygen
WSV-1-2P	LH, No Outlet Protection	CGA-025	Fuel Gas

Brass Body Valves for Non-Corrosive Gases

Pressures to 200 PSIG (1400 kPa)



Part No. 0205

Part No. 215-AR

Part No.	Service	Inlet	Outlet
B-Size (9/16"-18 Thread)			
0203	Oxygen CGA-022	B-Size Female Swivel Nut RH	B-Size Male RH
0204	Acetylene/F. Gases CGA-023	B-Size Female Swivel Nut LH	B-Size Male LH
0205	Oxygen CGA-022	1/4" NPT Male	B-Size Male RH
0206	Acetylene/F. Gases CGA-023	1/4" NPT Male	B-Size Male LH
0207	Oxygen CGA-022	B-Size Male RH	1/4" NPT Male
0208	Acetylene/F. Gases CGA-023	B-Size Male LH	1/4" NPT Male
208-F	Acetylene/F. Gases CGA-023	B-Size Male LH	1/4" NPT Female
0212	Acetylene/F. Gases CGA-023	B-Size Male LH	1/8" NPT Female
0209	Oxygen CGA-022	B-Size Male RH	B-Size Male RH
0210	Acetylene/F. Gases CGA-023	B-Size Male LH	B-Size Male LH
215-AR	Inert Gas CGA-032	1/4" NPT Male	5/8"-18 Female RH
215-AL	Inert Gas CGA-033	1/4" NPT Male	5/8"-18 Female LH
215-FR	Inert Gas CGA-032	5/8"-18 Male Swivel Nut RH	5/8"-18 Female RH
Pressures to 3000 PSIG (20,700 kPa) All Non-Corrosive Gases			
211-E		1/8" NPT Male	1/8" NPT Male
0211		1/4" NPT Male	1/4" NPT Male
0217		1/4" NPT Male	1/4" NPT Female
0218		1/4" NPT Female	1/4" NPT Male
218-D		1/4" NPT Female	1/4" NPT Female

Valves / Pipe Thread Fittings

Cartridge Valves, Stainless Steel

1/4" NPT M x 1/4" NPT M



110 Body Style

Part No.	Body & Seat Style	Description	Max PSIG
SS-110S	Male, Metal-To-Metal Seat	For corrosive gases	6000
SS-110K	Male, Soft Seat	Minimal force shut-off	3000
SS-110M	Male, Metering Seat	Fine thread for accuracy	6000
SS-120S	Male 90°, Metal-To-Metal Seat	For corrosive gases	6000
SS-120K	Male 90°, Soft Seat	Minimal force shut-off	3000
SS-120M	Male 90°, Metering Seat	Fine thread for accuracy	6000
SS-130S	Female, Metal-To-Metal Seat	For corrosive gases	6000
SS-130M	Female, Metering Seat	Fine thread for accuracy	6000
Replacement Cartridges			
SS-CS	Metal-To-Metal Seat Cartridge		
SS-CK	Soft Seat Cartridge		

Safety Relief Valves, Brass

- For gaseous or liquid nitrogen, oxygen, air and other cryogenic fluids



Part No. WMV-4-125

Part No.	Description
1/4" NPT Inlet Relief Valves	
WMV-4-22	22 PSIG Setting
WMV-4-35	35 PSIG Setting
WMV-4-50	50 PSIG Setting
WMV-4-100	100 PSIG Setting
WMV-4-125	125 PSIG Setting
WMV-4-230	230 PSIG Setting
WMV-4-235	235 PSIG Setting
WMV-4-350	350 PSIG Setting
WMV-4-7	Pipe-away Adaptor, All Models

Part No.	Description
1/2" NPT Inlet Relief Valves	
WMV-8-60	60 PSIG Setting
WMV-8-75	75 PSIG Setting
WMV-8-100	100 PSIG Setting
WMV-8-150	150 PSIG Setting
WMV-8-200	200 PSIG Setting
WMV-8-250	250 PSIG Setting
WMV-8-7	Pipe-away Adaptor, All Models

Pipe Thread Crosses



Part No. BCR-4LP



Part No. BCR-4HP

Part No.	Description	Material	Max PSIG (kPa)
4-Way Female:			
BCR-4LP	1/4" NPT	Brass	1000 (6900)
BCR-4HP	1/4" NPT	Brass	3000 (20,700)
BCR-4SS	1/4" NPT	St. Steel	6000 (41,300)

Pipe Thread Tees



Part No. BFT-4HP



Part No. BMT-4LP



Part No. BST-4LP

Part No.	Description	Material	Max PSIG (kPa)
3-Way Female:			
BFT-2LP	1/8" NPT	Brass	1000 (6900)
BFT-2HP	1/8" NPT	Brass	3000 (20,700)
BFT-4LP	1/4" NPT	Brass	1000 (6900)
BFT-4HP	1/4" NPT	Brass	3000 (20,700)
BFT-4SS	1/4" NPT	St. Steel	6000 (41,300)
BFT-6HP	3/8" NPT	Brass	3000 (20,700)
BFT-12HP	3/4" NPT	Brass	3000 (20,700)
Female x Male:			
BMT-2HP	1/8" NPT (Branch)	Brass	3000 (20,700)
BMT-4LP	1/4" NPT (Branch)	Brass	1000 (6900)
BST-4LP	1/4" NPT (Street)	Brass	1000 (6900)
BMT-4HP	1/4" NPT (Branch)	Brass	3000 (20,700)
BST-4HP	1/4" NPT (Street)	Brass	3000 (20,700)

Pipe Thread Fittings

Pipe Thread Reducer Couplings, Female to Female

Brass, Pressures to 3000 PSIG (20,700 kPa)



Part No. BF-4-2HP

Part No.	Description	Length	Hex
BF-4-2HP	1/4" NPT x 1/8" NPT	1.093"	3/4"
BF-6-4HP	3/8" NPT x 1/4" NPT	1.281"	7/8"
BF-8-4HP	1/2" NPT x 1/4" NPT	1.671"	1-1/8"
BF-12-8HP	3/4" NPT x 1/2" NPT	1.700"	1-3/8"

Pipe Thread Adaptors, Female to Male

To 3000 PSIG (20,700 kPa)



Part No. BA-4-2HP

Part No.	Description	Material	Length	Hex
BA-4-2HP	1/4" NPT x 1/8" NPT	Brass	1.062"	3/4"
BA-4HP	1/4" NPT x 1/4" NPT	Brass	1.281"	3/4"
BA-6-4HP	3/8" NPT x 1/4" NPT	Brass	1.312"	7/8"
BA-8-4HP	1/2" NPT x 1/4" NPT	Brass	1.500"	1-1/8"
BA-8-6HP	1/2" NPT x 3/8" NPT	Brass	1.562"	1-1/8"

Pipe Thread Hex Nipples, Male to Male



Part No. B-4SS

Part No. B-4HP

Part No.	Description	Material	Length	Hex
To 3000 PSIG (20,700 kPa):				
B-2HP	1/8" NPT x 1/8" NPT	Brass	.937"	7/16"
B-4HP	1/4" NPT x 1/4" NPT	Brass	1.437"	5/8"
B-6HP	3/8" NPT x 3/8" NPT	Brass	1.500"	11/16"
B-8HP	1/2" NPT x 1/2" NPT	Brass	1.875"	7/8"
B-9HP	3/4" NPT x 3/4" NPT	Brass	1.937"	1-1/8"
To 6000 PSIG (41,300 kPa):				
B-4SS	1/4" NPT x 1/4" NPT	St. Steel	1.437"	5/8"

Pipe Thread Couplings, Female to Female



Part No. BF-4HP

Part No. BF-4SS

Part No.	Description	Material	Length	Hex
To 3000 PSIG (20,700 kPa)				
BF-2HP	1/8" NPT x 1/8" NPT	Brass	.800"	9/16"
BF-4HP	1/4" NPT x 1/4" NPT	Brass	1.187"	3/4"
BF-6HP	3/8" NPT x 3/8" NPT	Brass	1.180"	7/8"
BF-8HP	1/2" NPT x 1/2" NPT	Brass	1.500"	1-3/8"
BF-12HP	3/4" NPT x 3/4" NPT	Brass	1.520"	1-3/8"
To 6000 PSIG (41,300 kPa)				
BF-4SS	1/4" NPT x 1/4" NPT	St. Steel	1.187"	3/4"

Pipe Thread Reducer Bushings, Male to Male

Pressures to 3000 PSIG (20,700 kPa)



Part No. B-4-2HP

Part No.	Description	Material	Length	Hex
B-4-2HP	1/4" NPT x 1/8" NPT	Brass	1.250"	5/8"
B-6-4HP	3/8" NPT x 1/4" NPT	Brass	1.467"	11/16"
B-8-4HP	1/2" NPT x 1/4" NPT	Brass	1.687"	7/8"
B-8-6HP	1/2" NPT x 3/8" NPT	Brass	1.718"	7/8"

Pipe Thread Extension Adaptors, Female to Male

Pressures to 3000 PSIG (20,700 kPa)



Part No. BE-4-3HP

Part No.	Description	Material	Length	Hex
BE-2-25HP	1/8" NPT	Brass	2-1/2"	9/16"
BE-4-3HP	1/4" NPT	Brass	3"	3/4"

Pipe Thread Fittings

Pipe Thread Bushings, Female to Male

Pressures to 3000 PSIG (20,700 kPa)



Part No. BB-4-8HP

Part No.	Description	Material	Length	Hex
BB-2-4HP	1/8" NPT x 1/4" NPT	Brass	.875"	5/8"
BB-2-6HP	1/8" NPT x 3/8" NPT	Brass	.906"	11/16"
BB-4-6HP	1/4" NPT x 3/8" NPT	Brass	.968"	3/4"
BB-4-8HP	1/4" NPT x 1/2" NPT	Brass	1.125"	7/8"
BB-4-12HP	1/4" NPT x 3/4" NPT	Brass	1.168"	1-1/8"
BB-6-8HP	3/8" NPT x 1/2" NPT	Brass	1.125"	7/8"
BB-8-12HP	1/2" NPT x 3/4" NPT	Brass	1.168"	1-1/8"

Pipe Thread Caps & Plugs



Part No. P-4HP

Part No. PC-4HP

Part No.	Description	Material	Hex
Pressures to 3000 PSIG (20,700 kPa)			
PC-2HP	Cap, 1/8" NPT F	Brass	5/8"
PC-4HP	Cap, 1/4" NPT F	Brass	3/4"
PC-6HP	Cap, 3/8" NPT F	Brass	7/8"
PC-8HP	Cap, 1/2" NPT F	Brass	1-1/8"
P-4HP	Hex Plug, 1/4" NPT M	Brass	5/8"
Pressures to 6000 PSIG (41,300 kPa)			
P-4SS	Hex Plug, 1/4" NPT	Stainless Steel	5/8"

Pipe Thread Nipples, Male

Pressures to 3000 PSIG (20,700 kPa)



BN-4-20HP

Part No.	Description	Material	Length
BN-2-25HP	1/8" NPT	Brass	2-1/2"
BN-4-15HP	1/4" NPT	Brass	1-1/2"
BN-4-20HP	1/4" NPT	Brass	2"
BN-4-30HP	1/4" NPT	Brass	3"
BN-4-35HP	1/4" NPT	Brass	3-1/2"
BN-4-50HP	1/4" NPT	Brass	5"
BN-6-35HP	3/8" NPT	Brass	3-1/2"
BN-8-35HP	1/2" NPT	Brass	3-1/2"

Pipe Thread Elbows



Part No. BL-4-4HP


Part No. BSL-4HP

Part No. BEL-4HP

Part No.	Description	Material	Max PSIG (kPa)
(90° Female to Female NPT)			
BEL-4-4LP	1/4" x 1/4"	Brass	1000 (6900)
BEL-4HP	1/4" x 1/4"	Brass	3000 (20,700)
BEL-6HP	3/8" x 3/8"	Brass	3000 (20,700)
BEL-8HP	1/2" x 1/2"	Brass	3000 (20,700)
(90° Female to Male NPT)			
BL-2-2LP	1/8" x 1/8"	Brass	1000 (6900)
BL-2HP	1/8" x 1/8"	Brass	3000 (20,700)
BL-4-2LP	1/4" x 1/8"	Brass	1000 (6900)
BL-4-4LP	1/4" x 1/4"	Brass	1000 (6900)
BL-4SS	1/4" x 1/4"	Stainless Steel	6000 (41,300)
BL-4HP	1/4" x 1/4"	Brass	3000 (20,700)
BL-6HP	3/8" x 3/8"	Brass	3000 (20,700)
BL-8HP	1/2" x 1/2"	Brass	3000 (20,700)
(45° Female to Male NPT)			
BSL-4-4LP	1/4" x 1/4"	Brass	1000 (6900)
BSL-4HP	1/4" x 1/4"	Brass	3000 (20,700)

Regulator Inlet Filters & Rings / Nipples

Filters for Regulator Inlet Nipples



Part No.	Description
OS-2	100 Mesh Stainless Steel: 140 Microns
OS-3	Porous Metal: Nickel Plated Bronze, 45 Microns

*May be used with all stainless steel and brass nipples, except for CGA-320 nipples

Retainer Ring for Selected Nipples



Part No.	Description
M00-5	Nipple Retainer Ring, Steel

*For use only in specially grooved nipples.
Ring prevents nut from sliding down to the nipple.

Regulator Nuts & Nipples, Brass

Pressures to 3000 PSIG (20,700 kPa)



Part No.	Part	Description	Service
CGA - 110 for Gases in Small Cylinders:			
110-3SF	Nipple	Brass, 1/8" NPT, 1-3/4" Long, .3125-32 UNEF-2A-RH-EXT	CGA-110
CGA - 170 for Non-Corrosive Gases in Small Cylinders:			
170-2	Nut	Brass, .5625"-18 UNF-2B-RH Female	CGA-170
170-3SF	Nipple	Brass, 1/8" NPT, 1-1/2" Long	CGA-170
170-4	Washer	Nylon	CGA-170
170-5	Adaptor	Brass, 1/8" NPT, 1-1/32" Long	CGA-170
CGA - 180 for Non-Corrosive Gases in Small Cylinders:			
180-2	Nut	Brass, .625"-18 UNF-2B, RH Female	CGA-180
180-3	Nipple	Brass, 1/8" NPT, 1-3/4" Long	CGA-180
180-4	Washer	Teflon	CGA-180
180-5	Adaptor	Brass, CGA-180 to 1/4" NPT Male	CGA-180

Regulator Nuts & Nipples, Brass & Stainless Steel

Pressures to 500 PSIG (3400 kPa)



Part No.	Part	Description	Service
CGA - 200 for "MC" Tank Acetylene:			
305-2	Nut	Brass, "MC" T, .628"-20 NGO, RH Female	CGA-200
305-3	Nipple	Brass, 7/16"-20, 1-1/4" Long	CGA-200
305-3A	Nipple	Brass, 1/8" NPT, 1-1/4" Long	CGA-200
CGA - 240 for Ammonia:			
SS-24-3	Nipple	St. Steel, 1/4" NPT, 3-1/4" Long	CGA-240

Regulator Nuts & Nipples, Brass

Pressures to 3000 PSIG (20,700 kPa)



Part No.	Part	Description	Service
CGA - 280 for Medical Breathing Mixtures:			
0284	Nut	Brass, .750"-14 NGO, RH Female	CGA-280
0283	Nipple	Brass, 1/4" NPT, 2" Long	CGA-280
CGA - 296 for Industrial Mixtures of Oxygen:			
29-2	Nut	Brass, .803"-14 UNS-2A, RH Male	CGA-296
29-3	Nipple	Brass, 1/4" NPT, 3" Long	CGA-296
6296	Nut	Brass, Hand-Tight, RH Male	CGA-296
6296-3	Nipple	Hand-Tight, 1/4" NPT, 3" Long	CGA-296
6296-0	O-Ring	Replacement	CGA-296

Regulator Inlet Nuts & Nipples

Regulator Nuts & Nipples, Brass

Pressures to 500 PSIG (3445 kPa)



Part No.	Part	Description	Service
CGA - 300 for Commercial Acetylene:			
16-2	Nut	Brass, .830"-14 NGO, RH Female	CGA-300
16-3	Nipple	Brass, 1/4" NPT, 1-15/16" Long	CGA-300
16-8	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-300
16-8CV	Nipple	Brass, 1/4" NPT, 2-1/2" Long w/CV	CGA-300
616-2	Nut	Brass, Hand-Tight RH Female	CGA-300
616-2P	Nut	Hand-Tight, Plastic Grip, RH Female	CGA-300
616-3	Nipple	Hand-Tight, 1/4" NPT, 2-1/2" Long	CGA-300
616-PT	Tip	Soft Tip, Replacement	CGA-300

Regulator Nuts & Nipples, Brass & Stainless Steel

Pressures to 3000 PSIG (20,700 kPa)



Part No.	Part	Description	Service
CGA - 320 for Carbon Dioxide:			
CO-2	Nut	Brass, .830"-14 NGO RH Female	CGA-320
CO-3	Nipple	Brass, 1/4" NPT, 2" Long	CGA-320
CO-4	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-320
CO-4CV	Nipple	Brass, 1/4" NPT, 2-1/2" Long w/Check	CGA-320
CO-7	Nipple	Brass, 1/2"-27, 2-1/2" Long	CGA-320
CO-8	Nipple	Brass, 1/4" NPT, LH, 2" Long	CGA-320
CO-3M2	Nipple	Recessed for 5/16" OD Tube	CGA-320
6-CO-2	Nut	Brass, Hand-Tight, RH Female	CGA-320
6-CO-2P	Nut	Plastic Grip, Hand-Tight, RH Female	CGA-320
6-CO-4	Nipple	Hand-Tight, 1/4" NPT, 2-1/2" Long	CGA-320
6-CO-4M1	Nipple	Hand-Tight, Recessed for 1/4" Tube	CGA-320
SS-CO-2	Nut	St. Steel, .830"-14 NGO, RH Female	CGA-320
SS-CO-3	Nipple	St. Steel, 1/4" NPT, 2" Long	CGA-320
CO-1TW	Washer	Teflon, Snap-In	CGA-320
CO-5	Washer	Fiber, Flat	CGA-320
CO-6	Washer	Teflon, Flat	CGA-320
CO-6N	Washer	Nylon, Snap-In	CGA-320

Regulator Nuts & Nipples, Brass & Stainless Steel

Pressures 3001 PSIG to 5500 PSIG (37,950 kPa)



Part No.	Part	Description	Service
CGA - 347 for Air/High Pressure:			
347-2	Nut	Brass, .830"-14 NGO, RH Female	CGA-347
347-3	Nipple	Brass, 1/4" NPT, 3" long	CGA-347
6347-2	Nut	Hand-Tight, RH Female	CGA-347
6347-3	Nipple	Hand-Tight, 1/4" NPT, 3" Long	CGA-347
6347-3-3	O-Ring	Replacement	CGA-347
SS-347-2	Nut	St. Steel, .830"-14 NGO, RH Female	CGA-347
SS-347-3	Nipple	St. Steel, 1/4" NPT, 3" Long	CGA-347
SS-6347-2	Nut	Hand-Tight, St. Steel, RH Female	CGA-347
SS-6347-3	Nipple	Hand-Tight, St. Steel, 1/4" NPT, 3" Long	CGA-347

Regulator Inlet Nuts & Nipples

Regulator Nuts & Nipples, Brass & Stainless Steel


Pressures to 3000 PSIG (20,700 kPa)



Part No.	Part	Description	Service
CGA - 350 for Hydrogen/Natural Gas:			
0082	Nut	Brass, .830"-14 NGO, LH Female	CGA-350
0083	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-350
83-CV	Nipple	Brass, 1/4" NPT, 2-1/2" Long w/Check V	CGA-350
83-M1	Nipple	Recessed for 1/4" OD Tube	CGA-350
83-M2	Nipple	Recessed for 5/16" OD Tube	CGA-350
0087	Nipple	Brass, 1/4" NPT, 3" Long	CGA-350
0682	Nut	Brass, Hand-Tight, LH Female	CGA-350
682P	Nut	Plastic Grip, Hand-Tight, LH Female	CGA-350
0683	Nipple	Hand-Tight, 1/4" NPT, 2-1/2" Long	CGA-350
683-PT	Tip	Soft Tip Replacement	CGA-350
SS-82	Nut	St. Steel, .830"-14 NGO, LH Female	CGA-350
SS-83	Nipple	St. Steel, 1/4" NPT, 2-1/2" Long	CGA-350
SS-83M1	Nipple	Recessed for 1/4" OD Tube	CGA-350
CGA - 500 for Medical Mixtures:			
500-2	Nut	Brass, .880"-14 NGO, RH Male	CGA-500
15-8	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-500
15-8CV	Nipple	Brass, 1/4" NPT, 2-1/2" Long w/CV	CGA-500
15-3	Nipple	Brass, 1/4" NPT, 3" Long	CGA-500
15-4	Nipple	Brass, 1/4" NPT, 3-1/2" Long	CGA-500
15-11	Nipple	Brass, 1/4" NPT, 4-1/2" Long	CGA-500
15-9	Nipple	Brass, 1/2"-27, 3" Long	CGA-500
15-8M1	Nipple	Recessed for 1/4" OD Tube	CGA-500
15-8M2	Nipple	Recessed for 5/16" OD Tube	CGA-500
15-8M3	Nipple	Recessed for 3/8" OD Tube	CGA-500

Regulator Nuts & Nipples, Brass & Stainless Steel

Pressures to 3000 PSIG (20,700 kPa)

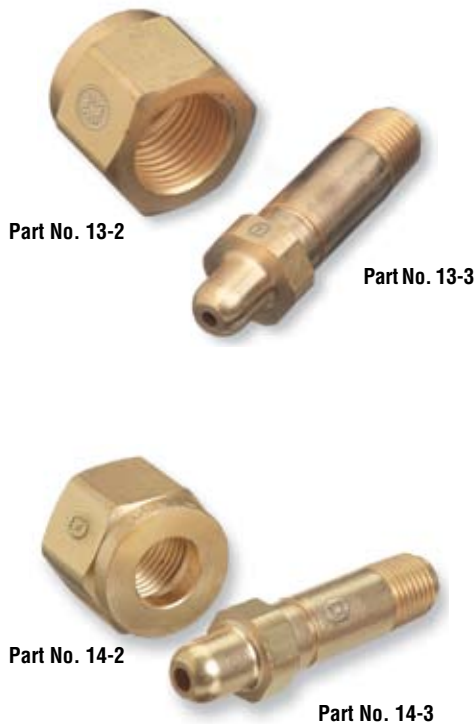

Part No.	Part	Description	Service
CGA - 326 for Nitrous Oxide:			
13-2	Nut	Brass, .830"-14 NGO, RH Female	CGA-326
13-3	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-326
13-3CV	Nipple	Brass, 1/4" NPT, 2-1/2" Long w/Check V	CGA-326
613-2	Nut	Brass, Hand-Tight, RH Female	CGA-326
613-2P	Nut	Plastic Grip, Hand-Tight, RH Female	CGA-326
613-5	Nipple	Hand-Tight, 1/4" NPT, 2-1/2" Long	CGA-326
613-KPT	Tip	Soft Tip, Replacement	CGA-326
SS-13-2	Nut	St. Steel, .830"-14 NGO, RH Female	CGA-326
SS-13-3	Nipple	St. Steel, 1/4" NPT, 2-1/2" Long	CGA-326
CGA - 330 for Non-Corrosive Gases (Brass) or Corrosive Gases (Stainless Steel):			
0334	Nut	Brass, .830"-14 NGO, LH Female	CGA-330
0333	Nipple	Brass, 1/4" NPT, 2" Long	CGA-330
333-A	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-330
SS-334	Nut	St. Steel, .830"-14 NGO, LH Female	CGA-330
SS-333	Nipple	St. Steel, 1/4" NPT, 2" Long	CGA-330
0335	Washer	Teflon	CGA-330
CO-6N	Washer	Nylon, Snap-In	CGA-330
CGA - 346 for Air:			
14-2	Nut	Brass, .830"-14 NGO, RH Female	CGA-346
14-3	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-346
14-3CV	Nipple	Brass, 1/4" NPT, 2-1/2" Long w/Check	CGA-346
614-2	Nut	Long Brass, Hand-Tight, RH Female	CGA-346
614-2P	Nut	Plastic Grip, Hand-Tight, RH Female	CGA-346
614-5	Nipple	Hand-Tight, 1/4" NPT, 2-1/2"	CGA-346
614-KPT	Tip	Soft Tip Replacement	CGA-346
SS-14-2	Nut	St. Steel, .830"-14 NGO, RH Female	CGA-346
SS-14-3	Nipple	St. Steel, 1/4" NPT, 2-1/2" Long	CGA-346

Regulator Inlet Nuts & Nipples

Regulator Nuts & Nipples, Brass & Stainless Steel

Pressures to 500 PSIG (3400 kPa)



Part No.	Part	Description	Service
CGA - 510 for POL Acetylene:			
15-2	Nut	Brass, .880"-14 NGO, LH Male	CGA-510
15-3	Nipple	Brass, 1/4" NPT, 3" Long	CGA-510
15-4	Nipple	Brass, 1/4" NPT, 3-1/2" Long	CGA-510
15-5	Nipple	Brass, 1/2"-27, 4" Long	CGA-510
15-8	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-510
15-8CV	Nipple	Brass, 1/4" NPT, 2-1/2" Long w/Check	CGA-510
15-9	Nipple	Brass, 1/2"-27, 3" Long	CGA-510
15-11	Nipple	Brass, 1/4" NPT, 4-1/4" Long	CGA-510
15-8M1	Nipple	Recessed for 1/4" OD Tube	CGA-510
15-8M2	Nipple	Recessed for 5/16" OD Tube	CGA-510
15-8M3	Nipple	Recessed for 3/8" OD Tube	CGA-510
615-2	Nut	Brass, Hand-Tight, LH Male	CGA-510
615-2P	Nut	Plastic Grip, Hand-Tight, LH Male	CGA-510
615-3	Nipple	Hand-Tight, 1/4" NPT, 3-1/2" Long, w/O-Ring	CGA-510
615-3T	Nipple	Hand-Tight, 1/4" NPT, 3" Long, w/Soft Tip	CGA-510
615-8M1T	Nipple	Hand-Tight, Recessed for 1/4" Tube w/Soft Tip	CGA-510
615-0	O-Ring	Replacement O-Ring	CGA-510
615-PT	Tip	Soft Tip Replacement	CGA-510
SS-15-2	Nut	St. Steel, .880"-14 NGO, LH Male	CGA-510
SS-15-3	Nipple	St. Steel, 1/4" NPT, 3" Long	CGA-510
SS-15-3CV	Nipple	St. Steel, 1/4" NPT, 3" Long w/CV	CGA-510
SS-15-8M1	Nipple	Recessed for 1/4" OD Tube	CGA-510
CGA - 520 for "B" Tank - Acetylene:			
300-2	Nut	Brass, .899"-18 NGO, RH Female	CGA-520
300-3	Nipple	Brass, 1/4" NPT, 1-3/4" Long	CGA-520

Regulator Nuts & Nipples, Brass & Stainless Steel

Pressures to 3000 PSIG (20,700 kPa)




Part No.	Part	Description	Service
CGA - 540 for Oxygen:			
0062	Nut	Brass, .908"-14 NGO, RH Female	CGA-540
63-CV	Nipple	Brass, 1/4" NPT, 2" Long w/CV	CGA-540
0063	Nipple	Brass, 1/4" NPT, 2-1/6" Long	CGA-540
0066	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-540
0069	Nipple	Brass, 1/4" NPT, 3" Long	CGA-540
0067	Nipple	Brass, 1/2"-27, 2-1/2" Long	CGA-540
63-M1	Nipple	Recessed for 1/4" OD Tube	CGA-540
63-M2	Nipple	Recessed for 5/16" OD Tube	CGA-540
0662	Nut	Brass, Hand-Tight, RH Female	CGA-540
662P	Nut	Plastic Grip, Hand-Tight, RH Female	CGA-540
0663	Nipple	Hand-Tight, 1/4" NPT, 2-1/2" Long	CGA-540
663-KPT	Tip	Soft Tip Replacement	CGA-540
SS-62	Nut	St. Steel, .908"-14 NGO, RH Female	CGA-540
SS-63	Nipple	St. Steel, 1/4" NPT, 2-1/2" Long	CGA-540
CGA - 555 for Butane, Propane (Liquid Withdrawl):			
0072	Nut	Brass, .908"-14 NGO, LH Female	CGA-555
0073	Nipple	Brass, 1/4" NPT, 2-1/16" Long	CGA-555
0076	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-555
0672	Nut	Brass, Hand-Tight, LH Female	CGA-555
672-P	Nut	Plastic Grip, Hand-Tight, LH Female	CGA-555
0673	Nipple	Hand-Tight, 1/4" NPT, 2-1/2" Long	CGA-555
673-KPT	Tip	Soft Tip Replacement	CGA-555
CGA - 577 for Oxygen:			
577-2	Nut	Brass, .965"-14 NGO, RH Female	CGA-577
577-4SF	Nipple	Brass w/Filter, 1/4" NPT, 3" Long	CGA-577

Regulator Inlet Nuts & Nipples

Regulator Nuts & Nipples, Brass & Stainless Steel

Pressures to 3000 PSIG (20,700 kPa)

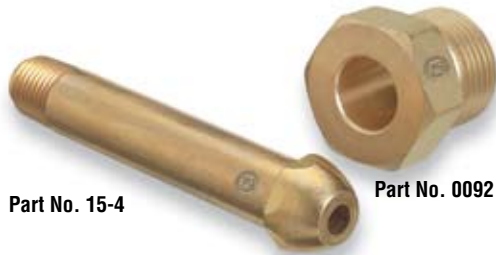

Part No. 15-4

Part No. 0092

Part No.	Part	Description	Service
CGA - 580 for Argon, Helium & Nitrogen:			
0092	Nut	Brass, .960"-14 NGO, RH Male	CGA-580
15-3	Nipple	Brass, 1/4" NPT, 3" Long	CGA-580
15-4	Nipple	Brass, 1/4" NPT, 3-1/2" Long	CGA-580
15-8	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-580
15-8CV	Nipple	Brass, 1/4" NPT, 2-1/2" Long w/CV	CGA-580
15-11	Nipple	Brass, 1/4" NPT, 4-1/2" Long	CGA-580
15-9	Nipple	Brass, 1/2"-27, 3" Long	CGA-580
15-5	Nipple	Brass, 1/2"-27, 4" Long	CGA-580
15-8M1	Nipple	Recessed For 1/4" OD Tube	CGA-580
15-8M2	Nipple	Recessed For 5/16" OD Tube	CGA-580
15-8M3	Nipple	Recessed For 3/8" OD Tube	CGA-580
0692	Nut	Brass, Hand-Tight, RH Male	CGA-580
692P	Nut	Plastic Grip, Hand-Tight, RH Male	CGA-580
615-8M1T	Nipple	Hand-Tight, Recessed for 1/4" Tube w/Soft Tip	CGA-580
615-0	O-Ring	Replacement O-Ring	CGA-580
615-PT	Tip	Soft Tip Replacement	CGA-580
SS-92	Nut	St. Steel, .960"-14 NGO, RH Male	CGA-580
SS-15-3	Nipple	St. Steel, 1/4" NPT, 3" Long	CGA-580
SS-15-3CV	Nipple	St. Steel, 1/4" NPT, 3" Long w/CV	CGA-580
SS-15-8M1	Nipple	Recessed For 1/4" OD Tube	CGA-580

Regulator Nuts & Nipples, Brass & Stainless Steel

Pressures to 3000 PSIG (20,700 kPa)



Part No. 0093

Part No. 15-3

Part No. 0604

Part No. 0603

Part No.	Part	Description	Service
CGA - 590 for Industrial Air:			
0093	Nut	Brass, .960"-14 NGO, LH Male	CGA-590
15-3	Nipple	Brass, 1/4" NPT, 3" Long	CGA-590
15-4	Nipple	Brass, 1/4" NPT, 3-1/2" Long	CGA-590
15-8	Nipple	Brass, 1/4" NPT, 2-1/2" Long	CGA-590
15-8CV	Nipple	Brass, 1/4" NPT, 2-1/2" Long w/CV	CGA-590
15-9	Nipple	Brass, 1/2"-27, 3" Long	CGA-590
15-5	Nipple	Brass, 1/2"-27, 4" Long	CGA-590
15-11	Nipple	Brass, 1/4" NPT, 4-1/2" Long	CGA-590
15-8M1	Nipple	Recessed For 1/4" OD Tube	CGA-590
15-8M2	Nipple	Recessed For 5/16" OD Tube	CGA-590
15-8M3	Nipple	Recessed For 3/8" OD Tube	CGA-590
0693	Nut	Brass, Hand-Tight, LH Male	CGA-590
693P	Nut	Plastic Grip, Hand-Tight, LH Male	CGA-590
615-3	Nipple	Hand-Tight, 1/4" NPT, 3-1/2" Long, w/O-Ring	CGA-590
615-3T	Nipple	Hand-Tight, 1/4" NPT, 3" Long, w/Soft Tip	CGA-590
615-0	O-Ring	Replacement O-Ring	CGA-590
615-PT	Tip	Soft Tip Replacement	CGA-590
SS-93	Nut	St. Steel, .960"-14 NGO, LH Male	CGA-590
SS-15-3	Nipple	St. Steel, 1/4" NPT, 3" Long	CGA-590
SS-15-3CV	Nipple	St. Steel, 1/4" NPT, 3" Long w/CV	CGA-590
SS-15-8M1	Nipple	Recessed For 1/4" OD Tube	CGA-590
CGA - 660 for Refrigerant Gases:			
0604	Nut	Brass, 1.035"-14 NGO, RH Female	CGA-660
0603	Nipple	Brass, 1/4" NPT, 1-3/4" Long	CGA-660
603-A	Nipple	Brass, 1/4" NPT, 2-1/4" Long	CGA-660
SS-603A	Nipple	St. Steel, 1/4" NPT, 2-1/4" Long	CGA-660
SS-604	Nut	St. Steel, 1.035"-14 NGO, RH Female	CGA-660
0665	Washer	Teflon	CGA-660

Regulator Inlet Nuts & Nipples

Regulator Nuts & Nipples, Stainless Steel

Pressures to 500 PSIG (3400 kPa)

Part No.	Part	Description	Service
CGA - 670 for Mixtures:			
SS-704	Nut	St. Steel, 1.035"-14 NGO, LH Female	CGA-670
SS-703A	Nipple	St. Steel, 1/4" NPT, 2-1/2" Long	CGA-670

Regulator Nuts & Nipples, Stainless Steel

Pressures to 7500 PSIG (41,300 kPa)

Part No.	Part	Description	Service
CGA - 677 for Inert Gases:			
SS-60-2	Nut	St. Steel, 1.035"-14 NGO, LH Female	CGA-677
SS-60-3	Nipple	St. Steel, 1/4" NPT, 2-1/2" Long	CGA-677
SS-60-4	Nipple	St. Steel, 3/8" NPT, 3" Long	CGA-677
SS-60M1	Nipple	Recessed For 1/4" OD Tube	CGA-677

Regulator Nuts & Nipples, Brass

Pressures 3000 PSIG (20,700 kPa) to 5500 PSIG (37,950 kPa)



Part No.	Part	Description	Service
CGA - 680 for Inert Gases:			
680-2	Nut	Brass, 1.040"-14 NGO RH Male	CGA-680
680-3SF	Nipple	Brass w/Filter, 1/4" NPT, 3" Long	CGA-680
680-4SF	Nipple	Brass w/Filter, 1/4" NPT, 3-1/2" Long	CGA-680
6680	Nut	Hand-Tight (Use With 680-4SF Nipple)	CGA-680
CGA - 695 for Flammable Gases:			
695-2	Nut	Brass, 1.040"-14 NGO LH Male	CGA-695
680-3SF	Nipple	Brass w/Filter, 1/4" NPT, 3" Long	CGA-695
680-4SF	Nipple	Brass w/Filter, 1/4" NPT, 3-1/2" Long	CGA-695
6695	Nut	Hand-Tight (Use With 680-4SF Nipple)	CGA-695

Regulator Nuts & Nipples, Brass

Pressures 4000 PSIG (27,600 kPa) to 5500 PSIG (37,950 kPa)

Part No.	Part	Description	Service
CGA - 701 for Inert Gases:			
701-2	Nut	Brass, 1.108"-14 NGO, RH Female	CGA-701
701-4SF	Nipple	Brass w/Filter, 1/4" NPT, 3" Long	CGA-701

Regulator Nuts & Nipples, Brass

Pressures 5500 PSIG (37,950 kPa) to 7500 PSIG (51,750 kPa)

Part No.	Part	Description	Service
CGA - 702 for Air:			
702-2	Nut	Brass, 1.120"-14 NGO, RH Male	CGA-702
680-3SF	Nipple	Brass w/Filter, 1/4" NPT, 3" Long	CGA-702
680-4SF	Nipple	Brass w/Filter, 1/4" NPT, 3-1/2" Long	CGA-702

Regulator Nuts & Nipples, Stainless Steel


Pressures to 3000 PSIG (20,700 kPa)

Part No.	Part	Description	Service
CGA - 705 for Ammonia:			
SS-705	Nut	St. Steel, 1.125"-14 UNS-2A, RH Female	CGA-705
SS-705-3	Nipple	1/4" NPT, 2-1/2" Long	CGA-705
0705	Washer	Teflon	CGA-705

Check Valves

Torch Model, A-Size (3/8"-24)

A one-piece, compact unit designed for A-Size applications. Mounts to torch to prevent reverse flow at point of origin.

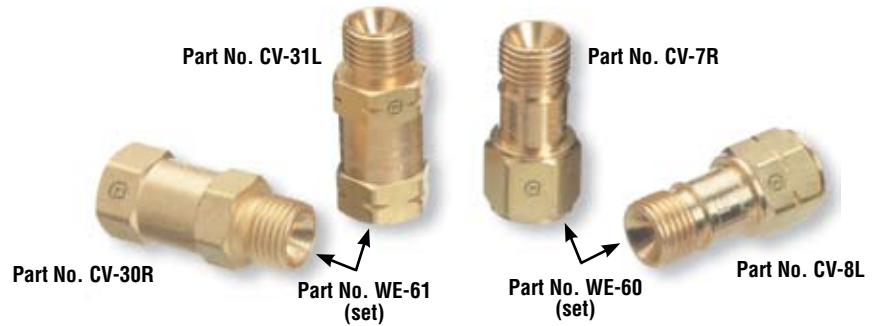

Part No.	Description	Service
Torch Model, A-Size (3/8"-24)		
CV-A9	Oxygen RH, A-Size Male to A-Size Female Nut, to 125 PSIG (800 kPa)	CGA-020
CV-A10	Fuel Gas LH, A-Size Male to A-Size Female Nut, to 50 PSIG (345 kPa)	CGA-021
WE-63	Torch Style - Set CV-A9 & CV-A10	-

Torch Model, B-Size (9/16"-18)

Mounts easily on torch, is readily seen and can be removed for periodic testing. Flows cut up to 12" steel plate or handle heating tips (1200 SCFH at 50 PSIG). Stops reverse flow at point of origin.



Part No.	Description	Service
Torch Model B-Size (9/16"-18)		
CV-7R	Oxygen RH, B-Size Male to B-Size Female Nut, to 125 PSIG (800 kPa)	CGA-022
CV-8L	Fuel Gas LH, B-Size Male to B-Size Female Nut, to 50 PSIG (345 kPa)	CGA-023
WE-60*	Torch Style - Set CV-7R & CV-8L	-

* Sold in retail clamshell packaging

Regulator Bushing Adaptor Model, B-Size (9/16"-18)

Easily mounts on outlet bushing of any regulator having a B-Size outlet. This model has the same flow capacity as the torch-type (1200 SCFH at 50 PSIG) when installed on a regulator. The Check Valve is to easy to see and is less subject to contamination, abuse and damage.



Part No.	Description	Service
Regulator Bushing Adaptor Model, B-Size (9/16"-18)		
CV-30R	Oxygen RH, B-Size Female Nut to B-Size Male, to 125 PSIG (800 kPa)	CGA-022
CV-31L	Fuel Gas LH, B-Size F Nut to B-Size Male, to 50 PSIG (345 kPa)	CGA-023
WE-61*	Regulator Adaptor - Set CV-30R & CV-31L	-

* Sold in retail clamshell packaging

Part No	Description	Inlet	Outlet	Material	Max PSIG
Inline NPT Check Valves, Heavy Duty					
CV-4M	1/4" NPT	Male	Male	Brass	3000
CV-6M	3/8" NPT	Male	Male	Brass	3000
CVF-4M	1/4" NPT	Female	Male	Brass	3000
CVM-4F	1/4" NPT	Male	Female	Brass	3000
CV-4MSS	1/4" NPT	Male	Male	St. Steel	6000
CVF-4MSS	1/4" NPT	Female	Male	St. Steel	6000
CVM-4FSS	1/4" NPT	Male	Female	St. Steel	6000


Part No.	Description	Service
Regulator Outlet Bushing Model, B-Size (9/16"-18)		
CV-32R	Oxygen RH, 1/4" NPT Male to B-Size Male, to 125 PSIG (800 kPa)	CGA-022
CV-33L	Fuel Gas LH, 1/4" NPT Male to B-Size Male, to 50 PSIG (345 kPa)	CGA-023
WE-62	Regulator Outlet Set Includes CV-32R & CV-33L	B-Size

Part No.	Description	Service
Check Valve Adaptors, same as CGA Both Ends		
CV-346	Air RH, Female	CGA-346
CV-540	Oxygen RH, Female	CGA-540

Part No.	Description
1/4" NPT Inline Check Valves, to 200 PSI (1400 kPa)	
CV-4	1/4" NPT Male to 1/4" NPT Male
CV-5	1/4" NPT Female to 1/4" NPT Male (Flow Male to Female)
CV-6	1/4" NPT Male to 1/4" NPT Female (Flow Female to Male)

Quick Connects Sets & Components / Flashback Arrestors

Quick Connects Sets & Components

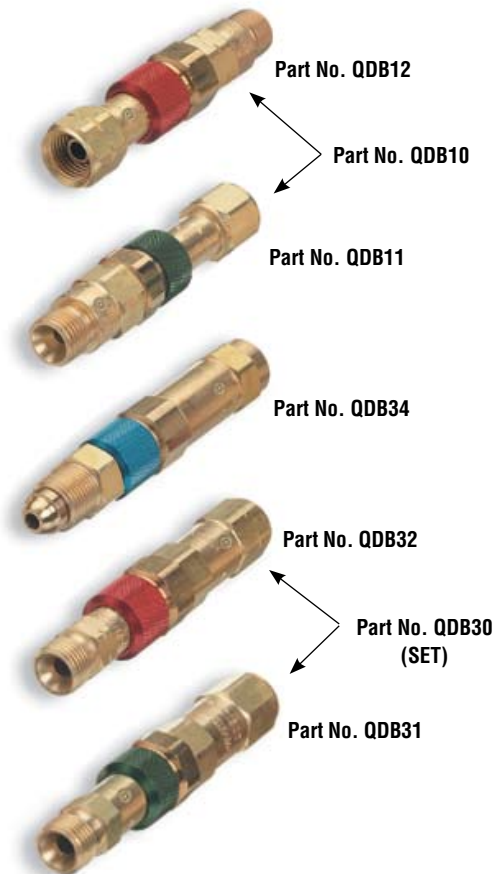

Quick Connect Sets

Part No.	Description	Components
QDB10*	Torch-to-Hose Set w/Check Valves	QDB11–Fuel Gas QDB12–Oxygen/Inert
QDB20*	Hose-to-Hose Set w/Check Valves	QDB21–Fuel Gas QDB22–Oxygen/Inert
QDB30*	Regulator-to-Hose w/Check Valves	QDB31–Fuel Gas QDB32–Oxygen


Quick Connect Individual Units

Part No.	Description	Components
Torch-to-Hose		
QDB11*	Fuel Gas w/ Check Valve	QDB200–Male Plug QDB201–Female Socket
QDB12*	Oxygen/Inert Gas w/Check Valve	QDB100– Male Plug QDB101– Female Socket
Hose-to-Hose		
QDB21*	Fuel Gas w/ Check Valve	QDB205–Male Plug QDB201–Female Socket
QDB22*	Oxygen/Inert Gas w/Check Valve	QDB105–Male Plug QDB101– Female Socket
Regulator-to-Hose		
QDB31*	Fuel Gas w/Check Valve	QDB205–Male Plug QDB206–Female Socket
QDB32*	Oxygen w/Check Valve	QDB105–Male Plug QDB106–Female Socket
QDB33*	Inert Gas–Regulator-to-Hose	QDB300–Male Plug QDB301–Female Socket
QDB34*	Inert Gas–Hose-to-Machine	QDB302–Male Plug QDB303–Female Socket

* Sold in retail clamshell packaging


Flashback Arrestors

B-Size, 9/16" - 18

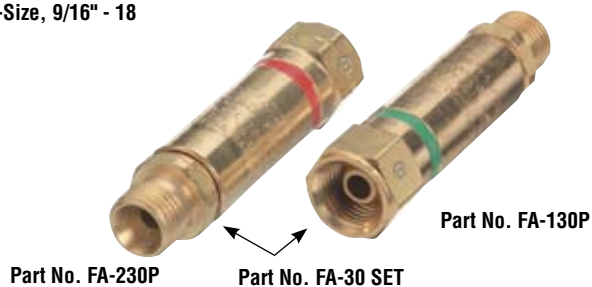

Part No.	Description
Flashback Arrestor Sets	
FA-10	Torch Style
FA-30	Regulator Adaptor Style
FAU-10	Torch Style
FAU-30	Regulator Adaptor Style
Flashback Arrestor Components	
FA-100P	Oxygen, Torch Style
FA-200P	Fuel Gas, Torch Style
FA-130P	Oxygen, Regulator Adaptor Style
FA-230P	Fuel Gas, Regulator Adaptor Style

Manifold Pigtail with Flash Arrestors

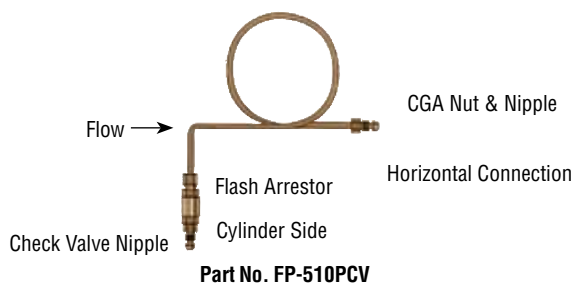

Part No	W/CV	Description	Service
FP-510	FP-510CV	Horizontal, 24" length	CGA 510, POL Acetylene
FP-510P	FP-510PCV	Horizontal, 18" length	CGA 510, POL Acetylene

Please Note: Using flashback arrestors w/ check valves as a precaution to avoid potentially dangerous situations is not a substitute for careful handling or strict adherence to safety rules and procedures for handling high pressure gases. Users should not tamper with the internal components of a flashback arrestor.

Flashback Arrestors cannot be cleaned or refilled after any flash in the system. They must be replaced if the pressure drop through the Arrestor reaches 10 PSIG or more at a rated capacity of 40 SCFH.

Quick Connect Sets / Flashback Arrestors

Caliber™ Nickel Plated Flashback Arrestors

- Nickel plated brass for greater surface hardness and exceptional corrosion resistance.
- Soft seat Buna Nitrile O-ring connections for extended life and excellent seal integrity.
- Combined flame barrier and check valve in one device.
- Internal check valve designed to prevent reverse flow and accidental mixing of oxygen and fuel gases.
- 316 stainless steel flame trap stops flashback.
- Contains non-interchangeable, color coded sets for oxygen (green) and fuel gas (red).
- Maximum operating pressures are 15 PSIG for acetylene, 22 PSIG for other fuel gases, and 125 PSIG for oxygen.
- Rated flow capacity of 40 SCFH with a 5 PSIG pressure drop.
- Caliber includes bonus flashback safety CD, reusable case, and "Made Right in the U.S.A." sticker.
- 10" maximum cutting capacity.
- Reusable flashback arrestor, manual resetting not required.
- 100% factory flame and leak tested.
- UL Listed.



Part No.	Description
FAU10	Torch style
FAU30	Regulator style

Safemates™ Nickel Plated Flashback Arrestors and Quick Connects

- Same as Caliber™ above.
- Includes spring loading locking mechanism which responds to fingertip action and achieves a gas tight seal.



Part No.	Description
QDF10	Torch to hose set w/ check valves (Oxy/Fuel Gas)
QDF30	Regulator to hose (Oxy/Fuel Gas)
QDFAU10	Torch
QDFAU30	Regulator

Quickmates™ Nickel Plated Quick Connects

- Nickel plated brass for greater surface hardness and exceptional corrosion resistance.
- Contains non-interchangeable, color coded sets for oxygen (green) and fuel gas (red).
- Maximum operating pressures are 15 PSIG for acetylene, 50 PSIG for other fuel gases, and 125 PSIG for oxygen.
- Instant closure on reverse flow check valve with total shutoff at only 10 oz. of back pressure.
- Exceed CGA flow specifications - 1100 SCFH flow at 125 PSIG inlet pressure and 800 SCFH flow at 125 PSIG inlet pressure when two additional check valves are used in conjunction with the Quickmates™ Quick Connects.
- UL Listed.



Part No.	Description
QDBU10	Set hose to torch
QDBU20	Set hose to hose
QDBU30	Set regulator to hose
QDBU33	Inert regulator to hose
QDBU34	Inert machine to hose

Flash Arrestors—Bodies & CGA Adaptor Assemblies



Part No. FA-2CV



CGA-510 Nut & Check Valve Nipple CGA-510 Cylinder Valve
Part No. FA-510CV

Part No.	Description
Arrestor Bodies	
FA-2	1/4" NPT Female x 1/4" NPT Female
FA-2CV	with Female Inlet Nut Check Valve
FA-3	1/4" NPT Female x 1/4" NPT Male
FA-3CV	with Female Inlet Nut Check Valve
Flashback Arrestor with Adaptor Assemblies	
FA-300	CGA-300 Commercial Acetylene
FA-300CV	CGA-300 Commercial Acetylene w/Inlet Check Valve
FA-510	CGA-510 POL Acetylene
FA-510CV	CGA-510 POL Acetylene w/Inlet Check Valve

Pressure Gauges

Regulator Gauges & Gauge Crystals



Part No. G-2-4000W



Part No. G-2-30RLW

2" Dia. x 1/4" NPT		2-1/2" Dia. w 1/4" NPT	
Part No.	Gauge Type	Part No.	Gauge Type
G-2-30RLW	30 PSIG Red Line	G-25-30RLW	30 PSIG Red Line
G-2-30W	30 PSIG	G-25-30W	30 PSIG
G-2-60W	60 PSIG	G-25-60W	60 PSIG
G-2-100W	100 PSIG	G-25-100W	100 PSIG
G-2-200W	200 PSIG	G-25-200W	200 PSIG
G-2-400W	400 PSIG	G-25-400W	400 PSIG
G-2-600W	600 PSIG	G-25-600W	600 PSIG
G-2-1000W	1000 PSIG	G-25-2000W	1000 PSIG
G-2-4000W	4000 PSIG	G-25-4000W	4000 PSIG
G-2-CW	Lexan Crystal	G-25-CW	Lexan Crystal

Installation Requires Teflon Tape or Oxygen Safe Compound To Guard Against Leakage

Cylinder Pressure Testing Gauges 2" Brass



Part No. G-584H

Part No.	Description	PSIG Scale	Service
G-204	"MC" Acetylene Tank	400	CGA-200
G-304	Commercial Acetylene	400	CGA-300
G-304H	Commercial Acetylene with Hand-Tight Nut	400	CGA-300
G-324	Carbon Dioxide	3000	CGA-320
G-324H	Carbon Dioxide with Hand-Tight Nut	3000	CGA-320
G-326	Nitrous Oxide	3000	CGA-326
G-346	Air	4000	CGA-346
G-346H	Air with Hand-Tight Nut	4000	CGA-346
G-354	Hydrogen	3000	CGA-350
G-354H	Hydrogen with Hand-Tight Nut	3000	CGA-350
G-514	POL Acetylene, Straight	400	CGA-510
G-514A	POL Acetylene, 90°	400	CGA-510
G-514AH	POL Acetylene, 90° with Hand-Tight Nut	400	CGA-510
G-514H	POL Acetylene with Hand-Tight Nut	400	CGA-510
G-524	"B" Tank Acetylene	400	CGA-520
G-544	Oxygen	3000	CGA-540
G-544A	Oxygen	4000	CGA-540
G-544H	Oxygen with Hand-Tight Nut	3000	CGA-540
G-544AH	Oxygen with Hand-Tight Nut	4000	CGA-540
G-584	Nitrogen, Argon, Helium	4000	CGA-580
G-584H	Nitrogen, Argon, Helium, Hand-Tight Nut	4000	CGA-580
G-594	Industrial Air	4000	CGA-590

Manifold Accessories

Manifold Tubing



Part No.	OD & Wall	Length	Style	Material
CT-40	1/4" x .065	50 Feet	Coil	Copper, Annealed
CT-50	5/16" x .065	50 Feet	Coil	Copper, Annealed
CT-60	3/8" x .065	50 Feet	Coil	Copper, Annealed

Manifold Tubing Adaptor Bushings



Part No. BT-2M2

Part No.	Description	Material
Fits PH-1 Pigtail Handle		
BT-2M1	1/4" NPTF x 1/4" OD Tubing Recess	Brass
BT-2M2	1/4" NPTF x 5/16" OD Tubing Recess	Brass
BT-2M3	1/4" NPTF x 3/8" OD Tubing Recess	Brass
BT-2M1-SS	1/4" NPTF x 1/4" OD Tubing Recess	St. Steel

Manifold Pipe & Pipe Fittings, Brass Brass Alloy 360

Pressures to 3000 PSIG (20,700 kPa)



Pipe Nipple Length

Part No.	Length	Size	Part No.	Length	Size
*(1/2" Pipe Wall Thickness - .196") *(3/4" Pipe Wall Thickness - .230")					
Threaded Pipe Nipples					
WHF-3-1	1-1/2"	1/2" NPT	WHF-3-9	1-1/2"	3/4" NPT
WHF-3-2	2"	1/2" NPT	WHF-3-10	2"	3/4" NPT
WHF-3-3	4"	1/2" NPT	WHF-3-11	4"	3/4" NPT
WHF-3-19	6"	1/2" NPT	WHF-3-21	6"	3/4" NPT
WHF-3-5	8-1/2"	1/2" NPT	WHF-3-13	8-3/8"	3/4" NPT
WHF-3-7	11-1/2"	1/2" NPT	WHF-3-16	11-3/8"	3/4" NPT

Cleaned for Oxygen Service—Suitable For Acetylene Service

Nominal Pipe Lengths Brass Alloy 360

Pressures to 3000 PSIG (20,700 kPa)




Short Pipe Length

Part No.	Length	Size	Part No.	Length	Size
Cleaned for Oxygen					
WHF-3-23	2"	1/2" Nom	WHF-3-20	6"	1/2" Nom
WHF-3-4	4"	1/2" Nom	WHF-3-6	8-1/2"	1/2" Nom
Not Cleaned for Oxygen					
WHF-3-120	6'	1/2" Nom	WHF-3-122	6'	3/4" Nom
WHF-3-17	12'	1/2" Nom	WHF-3-18	12'	3/4" Nom

Note: 12 Foot Lengths Must Ship Via Common Carrier

Pipe Tees, Female

Pressures to 3000 PSI (20,700 kPa)

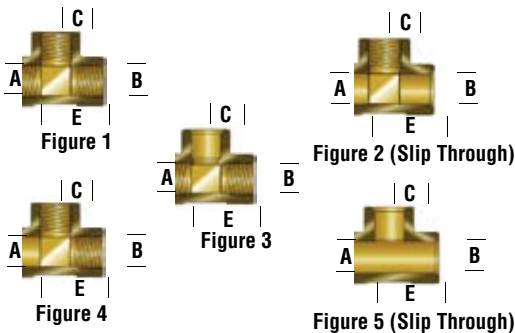

Part No.	Ref A	Ref B	Ref C & D	Ref E	Tees
WHF-4-7	1/2" NPT	1/2" NPT	1/2" NPT	2-1/2"	Figure 1
WHF-4-10	3/4" NPT	3/4" NPT	3/4" NPT	2-3/4"	Figure 1
WHF-4-14	.843"-.847"	.843"-.847"	1/2" NPT	2-1/2"	Figure 2
WHF-4-18	1.053"-1.057"	1.053"-1.057"	3/4" NPT	2-3/4"	Figure 2
WHF-4-13	1/2" NPT	1/2" NPT	.843"-.847"	2-1/2"	Figure 3
WHF-4-21	.843"-.847"	1/2" NPT	1/2" NPT	2-3/4"	Figure 4
WHF-4-22	1.053"-1.057"	3/4" NPT	3/4" NPT	2-1/2"	Figure 4
WHF-4-1	1.053"-1.057"	1.053"-1.057"	1.053"-1.057"	2-3/4"	Figure 5

.843"-.847" = 1/2" Pipe Slip* 1.053"-1.057" = 3/4" Pipe Slip

Manifold Accessories

Pipe Elbows, Female

Pressures to 3000 PSIG (20,700 kPa)




Figure 1




Figure 2




Figure 3

Part No.	Ref A	Ref B	Ref F	Elbows
WHF-4-8	1/2" NPT	1/2" NPT	1-1/4"	Figure 1
WHF-4-11	3/4" NPT	3/4" NPT	1-3/8"	Figure 1
WHF-4-15	1/2" NPT	.843"-.847"	1-1/4"	Figure 2
WHF-4-19	3/4" NPT	1.053"-1.057"	1-3/8"	Figure 2
WHF-4-2	.843"-.847"	.843"-.847"	1-1/4"	Figure 3

.843"-.847" = 1/2" Pipe Slip* 1.053"-1.057" = 3/4" Pipe Slip

Pipe Crosses, Female

Pressures to 3000 PSIG (20,700 kPa)




Figure 1




Figure 2 (Slip Through)




Figure 3

Part No.	Ref A	Ref B	Ref C & D	Ref E	Crosses
WHF-4-9	1/2" NPT	1/2" NPT	1/2" NPT	2-1/2"	Figure 1
WHF-4-12	3/4" NPT	3/4" NPT	3/4" NPT	2-3/4"	Figure 1
WHF-4-16	.843"-.847"	.843"-.847"	1/2" NPT	2-1/2"	Figure 2
WHF-4-23	.843"-.847"	1/2" NPT	1/2" NPT	2-1/2"	Figure 3

.843"-.847" = 1/2" Pipe Slip

Female NPT Outlet Adaptors for Manifold Pipeline, Brass & Stainless Steel

500 PSIG (3400 kPa)
3000 PSIG (20,700 kPa)
6000 PSIG (41,300 kPa)



Part No.	Gas Service	Description	Material
CGA Valve Outlets to Female Pipe Threads			
15-1	CGA-300	Commercial Acetylene, to 500 PSIG: RH Male .825"-14 NGO to 1/4" NPT Female	Brass
CO-2-1	CGA-320	Carbon Dioxide to 3000 PSIG: RH Male .825"-14 NGO, to 1/4" NPT Female	Brass
1321-1	CGA-326	Nitrous Oxide to 3000 PSIG: RH Male .825"-14 NGO to 1/4" NPT Female	Brass
1341-1	CGA-346	Air to 3000 PSIG: RH Male .825"-14 NGO to 1/4" NPT Female	Brass
SS-1341-1	CGA-346	Air to 3000 PSIG: RH Male .825"-14 NGO to 1/4" NPT Female	St. Steel
347-1	CGA-347	Air to 5500 PSIG: RH Male .825"-14 NGO to 1/4" NPT Female	Brass
SS-347-1	CGA-347	Air from 3,001 to 5500 PSIG: RH Male .825"-14 NGO to 1/4" NPT Female	St. Steel
800-1	CGA-350	Hydrogen, Natural Gas to 3000 PSIG: LH Male .825"-14 NGO to 1/4" NPT Female	Brass
500-1	CGA-500	Medical Mixtures to 3000 PSIG: RH Female .885"-14 NGO to 1/4" NPT Female	Brass
16-1	CGA-510	POL Acetylene, Propane to 500 PSIG: LH Female .885"-14 NGO to 1/4" NPT Female	Brass
300-1	CGA-510	POL Acetylene, Propane to 500 PSIG: 90° LH Female Nut .885"-14 NGO to 1/4" NPT Female	Brass
415-1	CGA-540	Oxygen to 3000 PSIG: RH Male .903"-14 NGO to 1/4" NPT Female	Brass
SS-415-1	CGA-540	Oxygen to 3000 PSIG: RH Male .903"-14 NGO to 1/4" NPT Female	St. Steel
414-1	CGA-555	Butane, Propane Liquid 3000 PSIG: LH Male .903"-14 NGO to 1/4" NPT Female	Brass
416-1	CGA-580	Argon, Helium, Nitrogen to 3000 PSIG: RH Female .965"-14 NGO to 1/4" NPT Female	Brass
417-1	CGA-590	Industrial Air to 3000 PSIG: LH Female .965"-14 NGO to 1/4" NPT Female	Brass
660-1	CGA-660	Refrigerant Gases to 3000 PSIG: RH Male 1.030"-14 NGO to 1/4" NPT Female	Brass
SS-660-1	CGA-660	Refrigerant Gases to 3000 PSIG: RH Male 1.030"-14 NGO to 1/4" NPT Female	St. Steel
SS-677-1	CGA-677	Argon, Helium, Nitrogen from 5,501 to 7500 PSIG: LH Male 1.030"-14 NGO to 1/4" NPT Female	St. Steel

Manifold Accessories

Male NPT Outlet Adaptors for Manifold Pipeline, Brass & Stainless Steel

500 PSIG (3400 kPa) • 3000 PSIG (20,700 kPa)
6000 PSIG (41,300 kPa)



Part No. WMS-1-53



Part No. B-71

Part No.	Gas Service	Description	Material
Nitrous Oxide to 3000 PSIG:			
B-1320	CGA-326	.825"-14 NGO, RH Male to 1/4" NPT	Brass
B-1321	CGA-326	.825"-14 NGO, RH Male to 3/8" NPT	Brass
B-1322	CGA-326	.825"-14 NGO, RH Male to 1/2" NPT	Brass
WMS-1-59	CGA-326	Check Valve Outlet to 1/2" NPT	Brass
Air to 3000 PSIG:			
B-1340	CGA-346	.825"-14 NGO, RH Male to 1/4" NPT	Brass
B-1342	CGA-346	.825"-14 NGO, RH Male to 1/2" NPT	Brass
WMS-1-62	CGA-346	Check Valve Outlet to 1/2" NPT	Brass
B-1340SS	CGA-346	.825"-14 NGO, RH Male to 1/4" NPT	St. Steel
Air to 5500 PSIG:			
B-348	CGA-347	.825"-14 NGO, RH Male to 1/2" NPT	Brass
Hydrogen, Natural Gas, to 3000 PSIG:			
B-30	CGA-350	.825"-14 NGO, LH Male to 1/4" NPT	Brass
B-32	CGA-350	.825"-14 NGO, LH Male to 1/2" NPT	Brass
B-33	CGA-350	.880"-14 NGO, LH Male to 3/4" NPT	Brass
Medical Breathing Mix to 3000 PSIG:			
B-500	CGA-500	.880"-14 NGO, RH Female to 1/4" NPT	Brass
Acetylene, Butane, Propane to 500 PSIG			
B-40	CGA-510	.885"-14 NGO, LH Female to 1/4" NPT	Brass
B-42	CGA-510	.885"-14 NGO, LH Female to 1/2" NPT	Brass
B-43	CGA-510	.885"-14 NGO, LH Female to 3/4" NPT	Brass
Oxygen to 3000 PSIG:			
B-50	CGA-540	.903"-14 NGO, RH Male to 1/4" NPT	Brass
B-51	CGA-540	.903"-14 NGO, RH Male to 3/8" NPT	Brass
B-52	CGA-540	.903"-14 NGO, RH Male to 1/2" NPT	Brass
WMS-1-53	CGA-540	Check Valve Outlet to 1/2" NPT	Brass
B-53	CGA-540	.903"-14 NGO, RH Male to 3/4" NPT	Brass
B-50SS	CGA-540	.903"-14 NGO, RH Male to 1/4" NPT	St. Steel
Butane, Propane (Liq/W) to 3000 PSIG:			
B-60	CGA-555	.903"-14 NGO, LH Male to 1/4" NPT	Brass
B-62	CGA-555	.903"-14 NGO, LH Male to 1/2" NPT	Brass
Oxygen 3000 PSIG to 4000 PSIG:			
B-578	CGA-577	.960"-14 NGO, RH Male to 1/2" NPT	Brass
Argon, Helium, Nitrogen, Etc to 3000 PSIG:			
B-70	CGA-580	.965"-14 NGO, RH Female to 1/4" NPT	Brass
B-71	CGA-580	.965"-14 NGO, RH Female to 3/8" NPT	Brass
B-72	CGA-580	.965"-14 NGO, RH Female to 1/2" NPT	Brass
WMS-1-54	CGA-580	Check Valve Outlet to 1/2" NPT	Brass
B-73	CGA-580	.965"-14 NGO, RH Female to 3/4" NPT	Brass
Industrial Air to 3000 PSIG:			
B-80	CGA-590	.965"-14 NGO, LH Female to 1/4" NPT	Brass
B-82	CGA-590	.965"-14 NGO, LH Female to 1/2" NPT	Brass
B-83	CGA-590	.965"-14 NGO, LH Female to 3/4" NPT	Brass
Refrigerant Gases to 3000 PSIG:			
B-660SS	CGA-660	1.030"-14 NGO, RH Male to 1/4" NPT	St. Steel
Air, Argon, Helium, Etc to 6000 PSIG:			
B-677SS	CGA-677	1.030"-14 NGO, LH Male to 1/4" NPT	St. Steel
B-678SS	CGA-677	1.030"-14 NGO, LH Male to 1/2" NPT	St. Steel
B-679SS	CGA-677	1.030"-14 NGO, LH Male to 3/4" NPT	St. Steel
Inert Gases to 5500 PSIG:			
B-682	CGA-680	1.045"-14 NGO, RH Female to 1/2" NPT	Brass

Manifold Accessories

Male NPT Outlet Adaptors for Manifold Pipeline, Brass & Stainless Steel

500 PSIG (3400 kPa) • 3000 PSIG (20,700 kPa)
6000 PSIG (41,300 kPa)



Part No. B-20

Part No.	Gas Service	Description	Material
Medical Breathing Mix to 3000 PSIG:			
WMS-1-64	CGA-280	.745"-14 NGO, RH Male, Check Valve Outlet to 1/2" NPT	Brass
Commercial Acetylene to 500 PSIG:			
B-10	CGA-300	.825"-14 NGO, RH Male to 1/4" NPT	Brass
B-12	CGA-300	.825"-14 NGO, RH Male to 1/2" NPT	Brass
B-13	CGA-300	.825"-14 NGO, RH Male to 3/4" NPT	Brass
Carbon Dioxide to 3000 PSIG:			
B-20	CGA-320	.825"-14 NGO, RH Male to 1/4" NPT	Brass
B-21	CGA-320	.825"-14 NGO, RH Male to 3/8" NPT	Brass
B-22	CGA-320	.825"-14 NGO, RH Male to 1/2" NPT	Brass
B-23	CGA-320	.825"-14 NGO, RH Male to 3/4" NPT	Brass

Manifold Coupler Tees, Brass & Stainless Steel

With and Without Check Valves



Part No. T-82

Part No. T-92CV

Part No.	W/CV	Gas Service	Description	Material
To 500 PSIG (3400 kPa)				
T-16	T-16CV	CGA-300	Commercial Acet., RH Female	Brass
T-15	T-15CV	CGA-510	POL Acetylene, LH Male	Brass
To 3000 PSIG (20,700 kPa)				
T-296	-	CGA-296	Industrial Mix /Oxy., RH Male	Brass
T-CO-2	-	CGA-320	Carbon Dioxide, RH Female	Brass
T-326	T-326CV	CGA-326	Nitrous Oxide, RH Female	Brass
T-346	T-346CV	CGA-346	Air, RH Female	Brass
T-82	T-82CV	CGA-350	Hydrogen, LH Female	Brass
T-62	T-62CV	CGA-540	Oxygen, RH Female	Brass
T-62SS	-	CGA-540	Oxygen, RH Female	St. Steel
T-72	T-72CV	CGA-555	Propane (Liquid/Water) LH Female	Brass
T-92	T-92CV	CGA-580	Nitrogen, Argon, Helium, RH Male	Brass
T-92SS	-	CGA-580	Nitrogen, Argon, Helium, RH Male	St. Steel
T-93	T-93CV	CGA-590	Industrial Air, LH Male	Brass
To 4000 PSIG (27,600 kPa)				
T-577	-	CGA-577	Oxygen, RH Female	Brass
To 5500 PSIG (37,950 kPa)				
T-347	-	CGA-347	Air, RH Female	Brass
T-347SS	-	CGA-347	Air, RH Female	St. Steel
T-680	-	CGA-680	Inert Gases, RH Male	Brass

Manifold 3-Way Outlet Coupler Tees, Brass



Part No. T3-540

Part No.	Gas Service	Description	Gas
Pressures to 3000 PSIG (20,700 kPa)			
T3-540	CGA-540	RH Male	Oxygen
T3-580	CGA-580	RH Female	Nitrogen, Argon, Helium

Manifold Accessories

Manifold 4-Way Outlet Coupler Tees, Brass

With and Without Check Valves



Part No. T4-540CV

Part No.	W/CV	Gas Service	Description	Gas
With CGA Nut & Nipple Pressures to 3000 PSIG (20,700 kPa)				
T4-540	T4-540CV	CGA-540	RH Male	Oxygen
T4-580	—	CGA-580	RH Female	Nitrogen, Argon, Helium

Manifold Block Assemblies, Brass



Part No. MB-70

Part No.	Description	Max PSIG	Gas	Gas Service
MB-346	RH Male Outlets	3000	Air	CGA-346
MB-40-7	LH Female Outlets	500	POL Acet., Propane	CGA-510
MB-50	RH Male Outlets	3000	Oxygen	CGA-540
MB-50CV	With Check Valve Inlet Nipple	3000	Oxygen	CGA-540
MB-70	RH Female Outlets	3000	Nitrogen, Argon, Helium	CGA-580
MB-70CV	With Check Valve Inlet Nipple	3000	Nitrogen, Argon, Helium	CGA-580

Use with any Pigtails having CGA connections. Brass Pigtails recommended for use with acetylene.

Manifold Hex Blocks, Brass & Stainless Steel



Part No. MB-7



Part No. MB-6

Part No.	Description	MAX PSIG	Material
2" Block, Six Outlets:			
MB-6	1/4" NPT Female Side Outlets	3000	Brass
MB-6SS	1/4" NPT Female Side Outlets	6000	St. Steel
2" Block, Seven Outlets:			
MB-7	1/4" NPT Female Side/Top Outlets	3000	Brass
MB-7SS	1/4" NPT Female Side/Top Outlets	6000	St. Steel

Chain & Plug Assemblies / Manifold Accessories

Chain & Plug Assemblies, Brass & Stainless Steel

- One and two-piece assemblies provide gas-tight sealing
- Meet all CGA specifications for sealing manifolds and cylinders
- CGA nut and blind nipple (plug) combination



Part No. 0992



Part No. CP-580

Part No.	Description	Material	Working Pressure	Gas	Service
Two-Piece Assemblies					
0927	9/16"-18 RH Female Nut & Plug	Brass	0-200	Oxygen	CGA-022
0928	9/16"-18 LH Female Nut & Plug	Brass	0-200	Acetylene	CGA-023
C-907	7/8"-14 RH Female Nut & Plug	Brass	0-200	Oxygen	CGA-024
C-908	7/8"-14 LH Female Nut & Plug	Brass	0-200	Acetylene	CGA-025
0921	5/8"-18 RH Female Nut (AW-7) & Plug	Brass	0-200	Inert Arc	–
0922	5/8"-18 RH Male Nut (AW-14A) & Plug	Brass	0-200	Inert Arc	–
9326	RH Female Nut & Plug	Brass	0-3000	Nitrous Oxide	CGA-326
9346	RH Female Nut & Plug	Brass	0-3000	Air	CGA-346
9347	RH Female Nut & Plug	Stainless Steel	0-5500	Air	CGA-347
0982	LH Female Nut & Plug	Brass	0-3000	Hydrogen, Nat. Gas	CGA-350
0915	LH Male Nut & Plug	Brass	0-500	POL Acetylene	CGA-510
0962	RH Female Nut & Plug	Brass	0-3000	Oxygen	CGA-540
0992	RH Male Nut & Plug	Brass	0-3000	Nitrogen, Argon, Helium	CGA-580
One-Piece Assemblies					
CP-320	RH Female Nut & Plug	Brass	3000	Carbon Dioxide	CGA-320
CP-326	RH Female Nut & Plug	Brass	3000	Nitrous Oxide	CGA-326
CP-346	RH Female Nut & Plug	Brass	3000	Air	CGA-346
CP-350	LH Female Nut & Plug	Brass	3000	Hydrogen, Nat. Gas	CGA-350
CP-510	LH Male Nut & Plug	Brass	500	POL Acetylene	CGA-510
CP-520	"B" Tank RH Female Nut & Plug	Brass	500	Acetylene	CGA-520
CP-540	RH Female Nut & Plug	Brass	3000	Oxygen	CGA-540
CP-580	RH Male Nut & Plug	Brass	3000	Nitrogen, Argon, Helium	CGA-580
CP-590	LH Male Nut & Plug	Brass	3000	Industrial Air	CGA-590

Manifold One-Piece Dust Cap Assemblies

Not Gas-Tight




Part No. DC-540

Part No.	Description	Gas	Service
DC-B7	RH Female B-Size	Oxygen	CGA-022
DC-B8	LH Female B-Size	Acetylene	CGA-023
DC-C7	RH Female C-Size	Oxygen	CGA-024
DC-C8	LH Female C-Size	Acetylene	CGA-025
DC-200	"MC" Tank, RH Female	Acetylene	CGA-200
DC-300	RH Female	Coml. Acetylene	CGA-300
DC-320	RH Female	Carbon Dioxide	CGA-320
DC-346	RH Female	Air	CGA-346
DC-350	LH Female	Hydrogen	CGA-350
DC-510	LH Male	POL Acetylene	CGA-510
DC-540	RH Female	Oxygen	CGA-540
DC-580	RH Male	Nitrogen, Argon, Helium	CGA-580
DC-660	RH Female	Mixtures	CGA-660

Special Order Pigtails & Rigid Pigtails


Directions for Ordering Western Pigtail

- Use the example and chart below to develop specifications for special order pigtails. (Example below is not the equation for diagram shown)

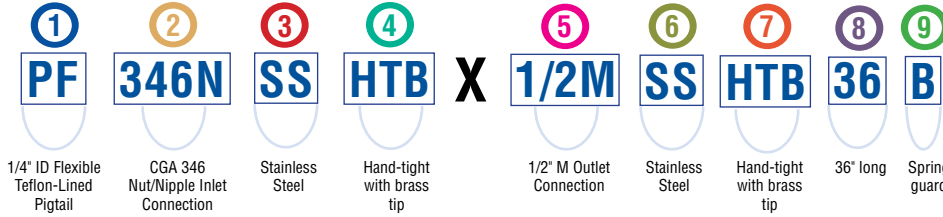

Model Options

Model	PSIG	kPa	Pigtail
P	3000	20,700	Rigid Copper
PB	3000	20,700	Rigid Brass
PS	6000	41,300	Rigid Stainless St.
PF	3000	20,700	Flexible Teflon-Lined
PFS	3000	20,700	Flexible Nylon-Lined
PF6	6000	41,300	Flexible Teflon-Lined

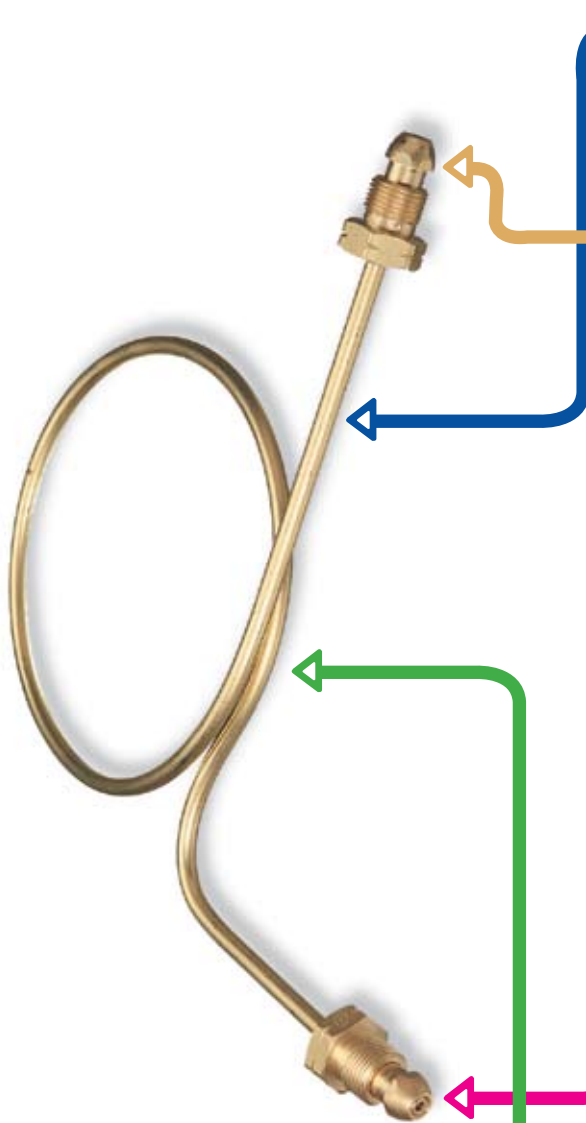

1 Tube / Hose

	Rigid Tube OD	Flex Hose ID
P4	1/4"	PF 1/4"
P	5/16"	PFS 1/4"
P6	3/8"	PF6 .229"
PB	5/16"	
PB6	3/8"	
PS	1/4"	

2 Inlet End

Example Equation	Result
CGA No. + N = CGA Nut/Nipple	540N
CGA No. +B = CGA VO or Body	540B
Fraction +M or F = ANSI Pipe Thread	1/4F

3 Inlet End

Metal	Symbol
Brass	Blank (None)
Plated steel	PL
St. steel	SS

4 Optional Features

Symbol	Feature
Blank	(None)
CV	Check Valve
FA	Flash Arrestor*
HTP	Hand Tight N/N w/ Plastic Grip
HTB	Hand Tight N/N w/Brass H/T Nut
GA	Gauge
PH	Brass Handle
VA	Shutoff Valve
EL	90° Elbow

X

5 Outlet End

Example Equation	Result
CGA No. + N = CGA Nut/Nipple	540N
CGA No. + B = CGA VO or Body	540N
Fraction + M or F = ANSI Pipe Thread	1/4F

6 Outlet End

Metal	Abbreviation
Brass	Blank (None)
Plated steel	PL
St. steel	SS

7 Optional Features

Symbol	Feature
Blank	(None)
CV	Check Valve
FA	Flash Arrestor*
HTP	Hand Tight N/N w/ Plastic Grip
HTB	Hand Tight N/N w/Brass H/T Nut
GA	Gauge
PH	Brass Handle
VA	Shutoff Valve
EL	90° Elbow

8 Tube / Hose

Rigid Tube	Flex Hose
i.e.-27 = 27"	Lengths in 6" Increments
i.e.-36 = 36"	
i.e.-48 = 48"	i.e.-12 = 12"
Min = 8"	Min = 12"
Max = 300"	Max = 300"

9 Bend / Swivel Options

Rigid Tube Bends

Symbol	Feature
COIL	Standard on 48+"
DBL	Two 3" loops
SGL	6" loop standard on 27" P, PB
SPCL	Special bend, print required

Flex Hose Only

Symbol	Feature
B	Spring guard
B1	Spring guard w/ swivel inlet
B2	Spring guard w/ swivel outlet
B1.2	Spring guard w swivel, both ends

Rigid Pigtails

Hand-Tight Rigid Pigtails for Plant or Filling Stations with Brass Connections

Pressures to 3000 PSIG (20,700 kPa)



Part No. PHC-83


Part No.	Description	Gas Service
Hand-Tight Nuts & Nipples *5/16" x .065" Wall Copper Tube		
PHC-320	RH F Carbon Dioxide	CGA-320
PHC-346	RH F Air	CGA-346
PHC-63	RH F Oxygen	CGA-540
PHC-83	LH F Hydrogen	CGA-350
PHC-92	RH M Nitrogen, Argon	CGA-580
PHC-93	LH M Industrial Air	CGA-590

Stainless Steel Rigid Pigtails

with Stainless Steel Connections


Pressures to 3000 PSIG (20,700 kPa)

- Type 304 Stainless Steel Tube
- TIG Welded For Long Service Life
- Type 316 Stainless Steel Welded Fittings
- Available In Straight Lengths
- Use With Either Stainless Steel or Brass Connections



Part No.	With CV	Description	Gas Service
1/4" x .049 Wall St. Steel Tube Type 316 SS CGA Fittings			
PS-320	--	Carbon Dioxide, RH F	CGA-320
PS-346	--	Air, RH F	CGA-346
PS-540	PS-540CV	Oxygen, RH F	CGA-540
PS-580	PS-580CV	Nitrogen, Argon, RH M	CGA-580

Rigid Pigtails, Brass Forged Handle with Brass Connections

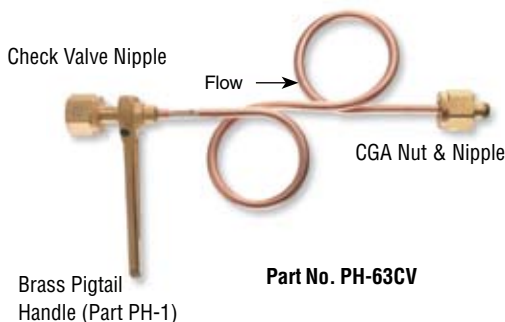

Part No. PH-63CV

Part No.	With CV	Description	Gas Service
5/16" x .065" Wall Copper Tube, Double Loop Pressures to 3000 PSIG (20,700 kPa)			
PH-320	--	RH F Carbon Dioxide	CGA-320
PH-326	PH-326CV	RH F Nitrous Oxide	CGA-326
PH-346	PH-346CV	RH F Air	CGA-346
PH-63	PH-63CV	RH F Oxygen	CGA-540
PH-73	--	LH F Propane (Liquid With.)	CGA-555
PH-83	PH-83CV	LH F Hydrogen	CGA-350
PH-92	PH-92CV	RH M Nitrogen, Argon	CGA-580
PH-93	--	LH M Industrial Air	CGA-590
5/16" x .065" Wall Brass Tube, Single Loop Pressures to 500 PSIG (3400 kPa)			
PH-300	--	RH F Commercial Acetylene	CGA-300
PH-510	--	LH M POL Acetylene	CGA-510

Manifold Rigid Pigtails, Copper Tubing with Brass Connections

Pressures to 3000 PSIG (20,700 kPa)



Part No. P-92CV

Part No.	With CV	Description	Gas Service
Annealed 5/16" x .065" Wall Copper Tube			
P-CO-3	--	RH F, Carbon Dioxide	CGA-320
P-63	P-63CV	RH F, Oxygen	CGA-540
P-73	--	LH F, Propane (Liquid With.)	CGA-555
P-83	P-83CV	LH F, Hydrogen	CGA-350
P-92	P-92CV	RH M, Nitrogen, Argon, Helium	CGA-580
P-93	--	LH M, Industrial Air	CGA-590
P-1320	P-1320CV	RH F, Nitrous Oxide	CGA-326
P-1340	P-1340CV	RH F, Air	CGA-346

Rigid Pigtails, Copper Tubing, Brass Shutoffs

with Brass Connections

Pressures to 3000 PSIG (20,700 kPa)



Part No. PV-92

Part No.	Description	Gas Service
Annealed 5/16" x .065" Wall Copper Tube		
PV-CO-3	RH F, Carbon Dioxide	CGA-320
PV-63	RH F, Oxygen	CGA-540
PV-92	RH M, Nitrogen, Argon, Helium	CGA-580

Rigid and Flexible Pigtails

Stainless Steel Rigid Pigtails

Pressures to 6000 PSIG (41,300 kPa)




Part No. PS-4-36

Part No.	Description
1/4" Female Both Ends	
PS-4-36	36" Length, Straight
PS-4-48	48" Length, Straight
PS-4-60	60" Length, Straight

Stainless Steel Flexible Pigtails, Brass Connections

- Sub assembly for special configurations
- Available in a variety of lengths
- 100% tested and cleaned for oxygen service

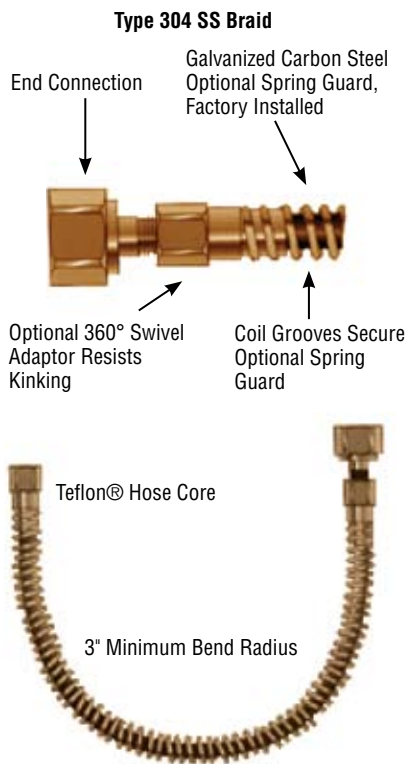

HOW TO ORDER PF-XXX-XX-X

END CONNECTIONS
From CGA Listing
at Left

LENGTH
18", 24", 36", 48"
(Note: Lengths
Do Not include
Connections)

OPTIONS
B = Spring Guard
B1= Spring Guard,
With Inlet
Swivel Adaptor
B2= Spring Guard,
With Outlet
Swivel Adaptor

Service	Part No.	Description	Working Pressure
-	PF-4	1/4" NPT F x 1/4" F with Spring Guard: Add B to End of Part No.	0-3000
Complete Assemblies (add length in inches to Part No.)			
CGA-296	PF-296 PF-296CV PF-296HT	Ind. Mixtures, RH Male with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-300	PF-16 PF-16CV	Commercial Acetylene, RH Female with Check Valve, Inlet	0-500
CGA-320	PF-320 PF-320HT	Carbon Dioxide, RH Female with Hand Tight Nut, One End	0-3000
CGA-326	PF-326 PF-326CV PF-326HT	Nitrous Oxide, RH Female with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-346	PF-346 PF-346CV PF-346HT	Air, RH Female with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-347	PF-347 PF-347CV PF-347HT	Air, RH Female with Check Valve, Inlet Side with Hand Tight Nut, One End	3001-5500
CGA-510	PF-15 PF-15CV PF-15HT	POL Acetylene, LH Male with Check Valve, Inlet Side with Hand Tight Nut, One End	0-500
CGA-540	PF-63 PF-63CV PF-63HT	Oxygen, RH Female with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-577	PF-577 PF-577CV PF-577HT	Oxygen, RH Female with Check Valve, Inlet Side with Hand Tight Nut, One End	3001-4000
CGA-580	PF-92 PF-92CV PF-92HT	Nitrogen, Argon, RH Male with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-590	PF-93 PF-93CV PF-93HT	Industrial Air, LH Male with Check Valve, Inlet Side with Hand Tight Nut, One End	0-3000
CGA-680	PF-680 PF-680CV PF-680HT	Inert Gases, RH Male with Check Valve, Inlet Side with Hand Tight Nut, One End	3001-5500
CGA-701	PF-701 PF-701CV PF-701HT	Oxygen, RH Female with Check Valve, Inlet Side with Hand Tight Nut, One End	4001-5500

Flexible Pigtails

Thermoplastic Flexible Pigtails, Nylon Lined, Brass Connections




Part No. PFS-83

Part No.	Description	Max PSIG	Gas Service
Complete Assemblies 100% Tested			
PFS-83*	Hydrogen, LH F	0-3000	CGA-350
PFS-83CV*	with Check Valve, Inlet Side		
PFS-92*	Helium, RH M	0-3000	CGA-580
PFS-92CV*	with Check Valve, Inlet Side		

*specify length in inches

Stainless Steel Flexible Pigtails, Teflon Lined, Stainless Steel Connections

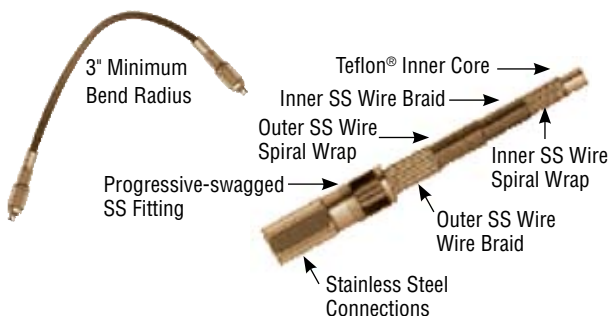

Part No.	Description	Max PSIG	Service
Complete Assemblies 100% Tested & Oxygen Cleaned			
PF-346SS	Air, RH F	3000	CGA-346
PF-347SS	High Pressure Air, RH F	5500	CGA-347
PF-350SS	Hydrogen, Natural Gas, LHF	3000	CGA-350
PF-540SS	Oxygen, RH F	3000	CGA-540
PF-580SS	Argon, Nitrogen, Etc, RH M	3000	CGA-580
PF-590SS	Air, Nitrogen, Etc, LH M	3000	CGA-590
PF-4SS	1/4" NPT Female to 1/4" NPT F	6000	--
PH-3	Chrome Plated brass Handle with Set Screw, Prevents Twisting when Tightening		

Stainless Steel Flexible Pigtails, Brass Connections

Pressures to 3000 PSIG (20,700 kPa)



No Specials Available

Part No.	Description	Length
100% Tested & Cleaned for Oxygen *Individually Poly Bagged 3" Minimum Bend Radius		
PF2-4-12	1/4" NPT Female End Connections	12"
PF2-4-18	1/4" NPT Female End Connections	18"
PF2-4-24	1/4" NPT Female End Connections	24"
PF2-4-36	1/4" NPT Female End Connections	36"
PF2-4-48	1/4" NPT Female End Connections	48"
PF2-4-60	1/4" NPT Female End Connections	60"
PF2-4-72	1/4" NPT Female End Connections	72"

Stainless Steel Flexible Pigtails, Stainless Steel Corrugated Inner Core, Stainless Steel Connections

Pressures to 3000 PSIG (20,700 kPa)




Part No. HPF-4-48

Part no.	Description	Length
100% Tested & Cleaned for Oxygen • Individually Poly Bagged 2-3/4" Minimum Bend Radius		
HPF-4-18	1/4" NPT F x 1/4" NPT F	18"
HPF-4-24	1/4" NPT F x 1/4" NPT F	24"
HPF-4-48	1/4" NPT F x 1/4" NPT F	48"

Rigid Pigtails / Cryogenic Hoses / SAE Flare Connections

Rigid Pigtails, Brass Acetylene & LPG Service

Pressures to 500 PSIG (3400 kPa)

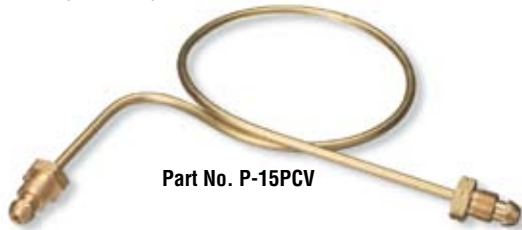

Part No. P-15PCV

Part No.	With CV	Description	Gas Service
5/16" x .065" Wall Brass Tubing 20" Finished Length Overall			
P-16	--	RH F Propane, Comm. Acet. Horiz.	CGA-300
PV-15	--	LH M Propane, Brass, Horiz.	CGA-510
P-15	P-15CV	LH M Propane, Mapp, Horiz.	CGA-510
P-15-P	P-15PCV	LH M Pyrofax, POL Acet. Vert.	CGA-510

Transfer Hose, Cryogenic



Part No.
WMH-2-9

Part No.	Description	Service
Oxygen Hose Assembly		
WMH-2-9	48"	CGA-440
WMH-2-10	60"	
WMH-2-11	72"	
WMH-2-12	120"	
WMH-2-13	144"	
Nitrogen, Argon Assembly		
WMH-2-14	48"	CGA-295
WMH-2-15	60"	
WMH-2-16	72"	
WMH-2-17	120"	
WMH-2-18	144"	
F-61	Oxygen, SS Cylinder Fill Elbow 90°	CGA-440
F-63	Nitrogen, Argon, SS Cylinder Fill Elbow 90°	CGA-295
F-62*	Phase Separator, 3/8" NPT F x 2-1/2" Long	--

*To attach to Transfer Hose Assembly, use F-32 for CGA-295 or F-42 for CGA-440

Brass SAE Flare Tubing Connections



Part No. F-11

Part No. F-10

Part No. F-30

Part No. F-32

Part No.	Description	Part	SAE Flare	Service
Pressures to 500 PSIG (3400 kPa)				
F-10	.4375"-20 UNF-2B, RH F	Nut	1/4"	CGA-165
F-11	1/8" NPT M	Adaptor	1/4"	CGA-165
F-12	1/4" NPT M	Adaptor	1/4"	CGA-165
F-20	.625"-18 UNF-2B, RH F	Nut	3/8"	CGA-182
F-22	1/4" NPT M	Adaptor	3/8"	CGA-182
F-30	.750"-16 UNF-2B, RH F	Nut	1/2"	CGA-295
F-31	1/4" NPT M	Adaptor	1/2"	CGA-295
F-32	3/8" NPT M	Adaptor	1/2"	CGA-295
F-33	1/2" NPT M	Adaptor	1/2"	CGA-295
F-40	.875"-14 UNF-2B, RH F	Nut	5/8"	CGA-440
F-41	1/4" NPT M	Adaptor	5/8"	CGA-440
F-42	3/8" NPT M	Adaptor	5/8"	CGA-440
F-43	1/2" NPT M	Adaptor	5/8"	CGA-440
F-44	3/4" NPT M	Adaptor	5/8"	CGA-440

Cylinder Adaptors

Cylinder Adaptors Table					
Cylinder CGA to Regulator CGA Plus Component Parts					
Cylinder Adaptor	Part Numbers		Regulator Adaptor	From Cylinder Service	To Regulator Service
	Cylinder				
	Nut	Nipple			
0322	305-2	305-3	15-1	CGA-200 "MC" Acetylene	CGA-300 Commercial Acetylene
0321	305-2	305-3	16-1	CGA-200 "MC" Acetylene	CGA-510 POL Acetylene 90°
0324	305-2	305-3	16-1	CGA-200 "MC" Acetylene	CGA-510 POL Acetylene
0305	305-2	305-3	305-1	CGA-200 "MC" Acetylene	CGA-520 "B" Tank 90°
0314	305-2	305-3	314-1	CGA-200 "MC" Acetylene	CGA-520 "B" Tank
0831	0284	0283	415-1	CGA-280 Medical Mixtures	CGA-540 Oxygen
0840	N/A	N/A	N/A	CGA-295 Argon (LqW)	CGA-440 Oxygen (LqW)
0841	29-2	29-3	417-1	CGA-296 Ind Mix (Oxygen)	CGA-590 Industrial Air
0304	16-2	16-3	302-1	CGA-300 Commercial Acetylene	CGA-200 "MC" Acetylene
0016	16-2	16-3	16-1	CGA-300 Commercial Acetylene	CGA-510 POL Acetylene
0061	16-2	16-3	16-1	CGA-300 Commercial Acetylene	CGA-510 POL Acetylene
1690	16-2	16-3	300-1	CGA-300 Commercial Acetylene	CGA-510 POL Acetylene 90°
0316	16-12	16-3	301-1	CGA-300 Commercial Acetylene	CGA-520 "B" Tank
0806	CO-2	CO-3	416-1	CGA-320 Carbon Dioxide	CGA-580 Nitrogen
0827	14-2	14-3	415-1	CGA-346 Air	CGA-540 Oxygen
0828	14-2	14-3	416-1	CGA-346 Air	CGA-580 Nitrogen
0843	14-2	14-3	417-1	CGA-346 Air	CGA-590 Industrial Air
0808	0082	0083	416-1	CGA-350 Hydrogen	CGA-580 Nitrogen
0872	500-2	15-8	415-1	CGA-500 Medical Mixtures	CGA-540 Oxygen
0873	500-2	15-8	416-1	CGA-500 Medical Mixtures	CGA-580 Nitrogen
0874	500-2	15-8	417-1	CGA-500 Medical Mixtures	CGA-590 Industrial Air
0320	15-2	15-8	302-1	CGA-510 POL Acetylene	CGA-200 "MC" Acetylene
0015	15-2	15-8	15-1	CGA-510 POL Acetylene	CGA-300 Commercial Acetylene
0051	15-2	15-8	15-1	CGA-510 POL Acetylene	CGA-300 Coml. Acet. 1 Piece
0818	15-2	15-8	800-1	CGA-510 POL Acetylene	CGA-350 Hydrogen
1516	15-2	15-8	1516-1	CGA-510 POL Acetylene	CGA-410 Canadian Acetylene
0820	15-2	15-8	300-1	CGA-510 POL Acetylene	CGA-510 POL Acetylene 90°
0315	15-2	15-8	301-1	CGA-510 POL Acetylene	CGA-520 "B" Tank
0306	300-2	--	306-1	CGA-520 "B" Tank Acetylene	CGA-300 Commercial Acetylene
0319	300-2	300-3	15-1	CGA-520 "B" Tank Acetylene	CGA-300 Commercial Acetylene
0317	300-2	300-3	16-1	CGA-520 "B" Tank Acetylene	CGA-510 POL Acetylene
0318	300-2	300-3	300-1	CGA-520 "B" Tank Acetylene	CGA-510 POL Acetylene 90°
0832	0062	0063	1341-1	CGA-540 Oxygen	CGA-346 Air
0416	0062	0063	416-1	CGA-540 Oxygen	CGA-580 Nitrogen
0802	0072	0073	16-1	CGA-555 Propane (LqW)	CGA-510 POL Acetylene
0809	0072	0073	416-1	CGA-555 Propane (LqW)	CGA-580 Nitrogen
0810	0092	15-8	CO-2-1	CGA-580 Nitrogen	CGA-320 Carbon Dioxide
0830	0092	15-8	1341-1	CGA-580 Nitrogen	CGA-346 Air
0811	0092	15-8	800-1	CGA-580 Nitrogen	CGA-350 Hydrogen
0415	0092	15-8	415-1	CGA-580 Nitrogen	CGA-540 Oxygen
0812	0092	15-8	414-1	CGA-580 Nitrogen	CGA-555 Propane (LqW)
0813	0092	15-8	417-1	CGA-580 Nitrogen	CGA-590 Industrial Air
0858	0093	15-8	1341-1	CGA-590 Industrial Air	CGA-346 Air
0815	0093	15-8	416-1	CGA-590 Industrial Air	CGA-580 Nitrogen

Cylinder Adaptors, Brass

CGA-200
To CGA-300: Part 0322



"MC" Acetylene Cylinder To Commercial Acetylene Regulator

CGA-280
To CGA-540: Part 0831



Medical Breathing Mix Cylinder To Oxygen Regulator

CGA-300
To CGA-510: Part 0061



Commercial Acetylene Cylinder To POL Acetylene Regulator

CGA-346
To CGA-580: Part 0828



Air Cylinder To Argon, Helium, Nitrogen Regulator

CGA-200
To CGA-510: Part 0321



"MC" Acetylene Cylinder To POL Acetylene Regulator

CGA-295
To CGA-440: Part 0840



Argon (LqW) Cylinder To Oxygen (LqW) Regulator

CGA-300
To CGA-510: Part 1690



Commercial Acetylene Cylinder To POL Acetylene Regulator At 90°

CGA-346
To CGA-590: Part 0843



Air Cylinder To Industrial Air Regulator

CGA-200
To CGA-510: Part 0324



"MC" Acetylene Cylinder To POL Acetylene Regulator

CGA-296
To CGA-590: Part 0841



Industrial Mix Of Oxygen (Over 23%) Cylinder To Industrial Air Regulator

CGA-300
To CGA-520: Part 0316



Commercial Acetylene Cylinder To "B" Tank Regulator

CGA-350
To CGA-580: Part 0808



Hydrogen Cylinder To Nitrogen, W.P. Regulator

CGA-200
To CGA-520: Part 0305



Adapts "MC" Acetylene Cylinder To "B" Tank Regulator At 90°

CGA-300
To CGA-200: Part 0304



Commercial Acetylene Cylinder To "MC" Acetylene Regulator

CGA-320
To CGA-580: Part 0806



Carbon Dioxide Cylinder To Nitrogen, W.P. Regulator

CGA-500
To CGA-540: Part 0872



Med Mixtures Cylinder To Oxygen Regulator

CGA-200
To CGA-520: Part 0314



"MC" Acetylene Cylinder To "B" Tank Regulator

CGA-300
To CGA-510: Part 0016



Commercial Acetylene Cylinder To POL Acetylene Regulator

CGA-346
To CGA-540: Part 0827



Air Cylinder To Oxygen Regulator

CGA-500
To CGA-580: Part 0873



Med Mixtures Cylinder To Nitrogen, W.P. Regulator

CGA-500
To CGA-590: Part 0874



Medical Mixtures Cylinder To Industrial Air Regulator

CGA-510
To CGA-410: Part 1516



POL Acetylene Cylinder To Canadian Acetylene Regulator

CGA-520
To CGA-510: Part 0317



"B" Tank Cylinder To POL Acetylene Regulator

CGA-555
To CGA-580: Part 0809



Propane (LqW) Cylinder To Nitrogen, W.P. Regulator

CGA-510
To CGA-200: Part 0320



POL Acetylene Cylinder To Commercial "MC" Acetylene Regulator

CGA-510
To CGA-510: Part 0820



POL Acetylene Cylinder To POL Acetylene Regulator At 90°

CGA-520
To CGA-510: Part 0318



"B" Tank Cylinder To POL Acetylene Regulator At 90°

CGA-580
To CGA-320: Part 0810



Nitrogen W.P. Cylinder To Carbon Dioxide Regulator

CGA-510
To CGA-300: Part 0015



POL Acetylene Cylinder To Commercial Acetylene Regulator

CGA-510
To CGA-520: Part 0315



POL Acetylene Cylinder To "B" Tank Regulator

Cylinder Adaptors, Brass

<p>CGA-540 To CGA-346: Part 0382</p>  <p>Oxygen Cylinder To Air Regulator</p>	<p>CGA-580 To CGA-346: Part 0830</p>  <p>Nitrogen Cylinder To Air Regulator</p>	<p>CGA-510 To CGA-300: Part 0051</p>  <p>POL Acetylene Cylinder To Commercial Acetylene Regulator (1 Piece)</p>	<p>CGA-520 To CGA-200: Part 0306</p>  <p>"B" Tank Cylinder To "MC" Acetylene Regulator</p>	<p>CGA-540 To CGA-580: Part 0416</p>  <p>Oxygen Cylinder To Nitrogen, Argon, W.P. Regulator</p>
<p>CGA-580 To CGA-350: Part 0811</p>  <p>Nitrogen W.P. Cylinder To Hydrogen Regulator</p>	<p>CGA-510 To CGA-350: Part 0818</p>  <p>POL Acetylene Cylinder To Hydrogen Regulator</p>	<p>CGA-520 To CGA-300: Part 0319</p>  <p>"B" Tank Cylinder To Commercial Acetylene Regulator</p>	<p>CGA-555 To CGA-510: Part 0802</p>  <p>Propane (LqW) Cylinder To POL Acetylene Regulator</p>	<p>CGA-580 To CGA-540: Part 0415</p>  <p>Nitrogen W.P. Cylinder To Oxygen Regulator</p>
<p>CGA-580 To CGA-555: Part 0812</p>  <p>Nitrogen W.P. Cylinder To Propane (LqW) Regulator</p>	<p>CGA-580 To CGA-590: Part 0813</p>  <p>Nitrogen W.P. Cylinder To Industrial Air Regulator</p>	<p>CGA-590 To CGA-346: Part 0858</p>  <p>Industrial Air Cylinder To Air Regulator</p>	<p>CGA-590 To CGA-580: Part 0815</p>  <p>Industrial Air Cylinder To Nitrogen, W.P. Regulator</p>	

Compressed Gas Association

Western Enterprises manufactures fittings and gas manifolds to the standards of the Compressed Gas Association (CGA regulators), where applicable. Western's product design engineering department will evaluate the customer requirements for special order products and make recommendations based on related CGA information.

Acetylene CGA 510
P.O.L.

Acetylene CGA 300
Commercial

Compressed Air CGA 346

Argon CGA 580

Carbon Dioxide CGA 320

Helium CGA 580

Hydrogen CGA 350

Nitrogen CGA 580
W.P.

Nitrous Oxide CGA 326

Oxygen CGA 540
Nut & Nipple

Oxygen CGA 870
Yoke

Fuel Gases CGA 510
Liquified

Nitrogen CGA 590
O.P.

Tungsten Grinder / Hose Braces and Clamps / Hose Repair Kits

Triad™ Tungsten Grinder

Provides operators with the versatility and accuracy needed to prepare tungsten for both orbital welding and hand-held applications.

- Grinding, cutting and facing capabilities.
- Eliminate the need and cost for additional preparation tools.
- Accommodates six different electrode sizes.
- Four-angle (15°, 18°, 22.5° and 30°) grinding capabilities.
- A robust industrial-grade motor extends grinder life and runs smooth.
- A comfortable lightweight body.
- High-quality, dual-sided, diamond-coated grinding wheels.
- Standard and rough grinding wheels for proper grind finish for the given tungsten diameter, cut up to 5/32" (4.0 mm) and precisely face for welding at elevated amperages. (Standard grinding wheel included with Triad.™)
- Electrode holder provides a secure grip to reduce the potential for flat spots.
- Sturdy steel carrying case included.

Part No. TIG-PLUS



Dual Hose Braces, Brass, Oval



Part No. 9116



Part No. 9940-P

Part No.	Inside Dimension	Length	Metal Thickness
Dimensions In Inches			
9116	.448 x .890	15/32"	.019
9979	.474 x .943	15/32"	.019
9940-P	.535 x 1.071	3/4"	.024
0453	.593 x 1.238	3/4"	.025
453-A	.640 x 1.310	3/4"	.025
0454	.700 x 1.325	3/4"	.025

Hose Clamps, Brass



Part No. 0500



Part No. 0502

Part No.	For Hose ID	Clamp ID
Dimensions In Inches		
0500	3/16"	7/16"
0501	1/4"	1/2"
0502	1/4"	9/16"
0503	3/8"	5/8"
0504	3/8"	11/16"
0505	3/4"	3/4"

Hose Repair Kits

Hose repair kits include crimping tool, nuts, couplers, splicers, nipples and ferrules. Fast, easy concave crimp ensures strong connections. Convenient plastic case is durable and includes a full color label and description chart. (See previous page for more information on the crimp tools included in the kits)



Part No. CK-3



Part No. CK-5

Part No.	Description
Hose Repair Kits with "Hammer-Strike" Crimp Tool: A-Size (3/8"-24) & B-Size (9/16"-18) Fittings	
CK-1	Kit with C-1 Crimp Tool for 3/16", 1/4" ID Hose
CK-3	Kit with C-3 Crimp Tool for 3/16", 1/4", 3/8" ID Hose
CK-20	Kit with C-1 Crimp Tool for 3/16", 1/4" ID Hose
CK-22	Kit with C-1 Crimp Tool, for 1/4" ID Hose, B-Size Fittings Only
Hose Repair Kits with "Hand-Grip" Crimp Tool: A-Size (3/8"-24) & B-Size (9/16"-18) Fittings	
CK-5	Kit with C-5 Crimp Tool for 3/16", 1/4" ID Hose
CK-6	Kit with C-6 Crimp Tool for 5/16", 3/8" ID Hose
CK-24	Kit with C-5 Crimp Tool for 3/16", 1/4" ID Hose
CK-26	Kit with C-5 Tool for 1/4" ID Hose, B-Size Fittings Only
Hose Repair Kit - B-Size (9/16"-18) Fittings Only	
CK-7	B-Size (9/16"-18) Kit, 189 Fittings in Case (Does not include Crimp Tool)
Hose Repair Kit Case Only	
A10004	Western Kit Case, 11" x 7" x 1-1/4"
Brass Ferrule & Crimping Tool Kit	
CK-10	Ferrule Kit, 134 pieces, C-3B Crimp Tool

Hose Ferrules / Crimping Tools

Brass Hose Ferrules



See listing and descriptions of all Western hand crimp tools and model 5111-A bench tool.
 **Use of hand tool is not recommended. Model 5111-A is a heavy-duty bench style ferrule machine.

Other Western fittings available in Section 1-Fuel Gas Equipment starting on page 111.

Part No.	Inside Diameter	Length	Recommended Hand Crimp Tool	5111-A Die	
				Plain	Ribbed
Listed By Size In Inches *Smallest To Largest ID					
6231	.330	1/2"	C-5A	-	CDR-46
0833	.358	1/2"	C-5A	-	CDR-45
0622	.380	1/2"	C-5A	-	-
0620	.410	1/2"	C-5A	-	-
0769	.450	9/16"	OC-1, OC-5, C-5A, CR-100	-	CDR-41
4750	.478	11/16"	CR-100	-	CDR-41
0624	.500	1/2"	CR-100	-	CDR-40
7322	.500	1"	C-3B	-	CDR-39
0625	.525	1/2"	C-3B	-	CDR-39
7323	.525	1"	C-3B	-	CDR-38
0626	.548	31/64"	C-3B	-	CDR-38
7325	.562	1"	C-3B, OC-5, CR-100	CD-38	CDR-37
3588	.564	3/4"	C-3B, OC-5, CR-100	CD-38	CDR-37
0K-K	.575	31/64"	OC-1, C-3B, OC-3, OC-5, CR-100	CD-38	CDR-37
7326	.593	1"	OC-1, C-3B, OC-3, OC-5	-	CDR-36
0J-J	.600	1/2"	OC-1, C-3B, OC-3, OC-5	-	CDR-36
0I-I	.625	1/2"	C-3B, OC-6, CR-100	-	CDR-35
7327	.625	1"	C-3B, OC-6, CR-100	-	CDR-35
0H-H	.650	1/2"	OC-6	-	CDR-34
7328	.656	1"	C-3B, OC-6, CR-100	-	CDR-34
0G-G	.675	33/64"	C-3B, OC-6, CR-100	-	-
7329	.687	1"	OC-3, OC-6, CR-100	-	-
0F-F	.700	33/64"	OC-3, OC-6, CR-100	-	CDR-32
7330-B	.718	1"	OC-3, OC-6	-	-
0E-E	.725	17/32"	OC-3, OC-6	-	-
7331	.750	1"	OC-3, OC-6	-	-
0C-C	.775	17/32"	OC-3, OC-6	-	-
7332	.781	1"	OC-3, OC-6	-	-
7333	.812	1"	5111-A**	CD-28	-
7244-A	.875	27/32"	5111-A**	CD-26	CDR-25
5029-A	.900	27/32"	5111-A**	CD-25	-
7242-A	.937	27/32"	5111-A**	-	-
5028-A	.975	27/32"	5111-A**	CD-22	-

Bench Ferrule Crimping Tool

- Dies are available with plain contracting surface (CD) or special three-ribbed surface (CDR). Sets are ordered by using die numbers in the Ferrule Table. (Examples: Plain Die for Ferrule K-K: Order CD-38 Ribbed Die for Ferrule K-K: Order CDR-37)
- Dies need to be ordered separately
- Dies are available in standard sets - each set includes four segments.



Part No.	Description
5111-A	Bench model crimper

Hand-Held Ferrule Crimp Tools



Part No. OC-3

Part No. C-5A

Part No.	Description
Crimp with Hammer Strike or Vise Pressure:	
OC-1	2 Hole Jaw 5/8" Wide, Use on 3/16", 1/4" Hose
OC-3	3 Hole Jaw 1" Wide, Use on 3/16", 1/4", 3/8" Hose
C-3B	3 Hole Jaw 1" Wide, Use on 1/4", 5/16", 3/8" Hose
Crimp with Hand-Grip Pressure:	
OC-5	2 Hole Jaw 1/2" Wide, Use on 3/16", 1/4" Hose
C-5A	3 Hole Jaw 1/2" Wide, Use on 1/8", 3/16" Hose
OC-6	2 Hole Jaw 1/2" Wide, Use on 5/16", 3/8" Hose

Heavy-Duty Ferrule Crimp Machine



Part No.	Description
CR-100	Heavy-Duty Ferrule Crimp Machine

Crimps Ferrules on 3/16", 1/4", 5/16", 3/8" Hose Die Width 1/2"